


# PD27/29 ALARM KIT

## INSTALLATION INSTRUCTIONS

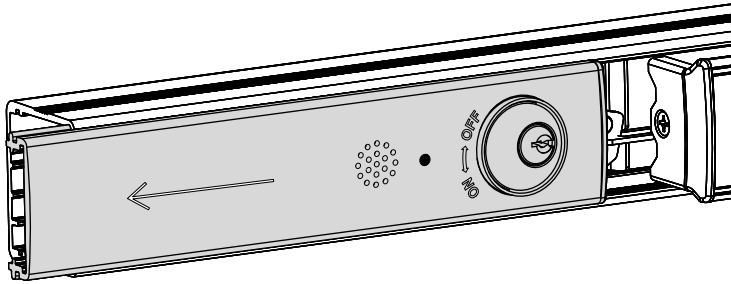

### 1. REMOVE FILLER PLATE

- Slide filler plate away from pushbar
- If plastic filler plug remains inside main rail, remove and reinstall into filler plate

### 2. SET SIREN TIME



#### DS1 - Siren Time

1	2	Siren Time	← FACTORY DEFAULT
OFF	OFF	Infinite	
OFF	ON	1 minute	
ON	OFF	3 minute	
ON	ON	7 minute	

- For relay option only: enable or disable relay

#### DS2 - Relay Output

1	Relay Output	← FACTORY DEFAULT
OFF	Disabled	
ON	Enabled	

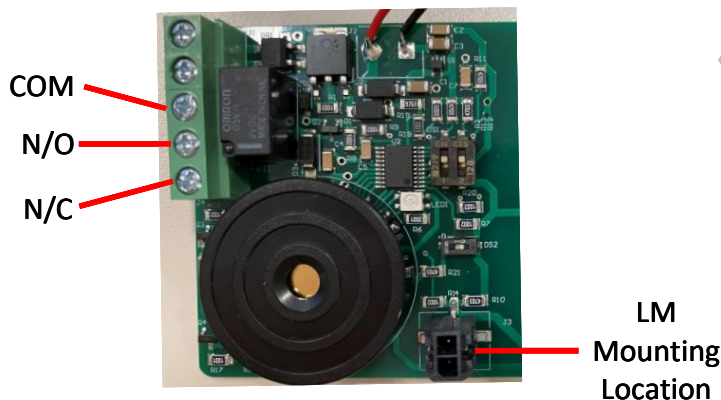
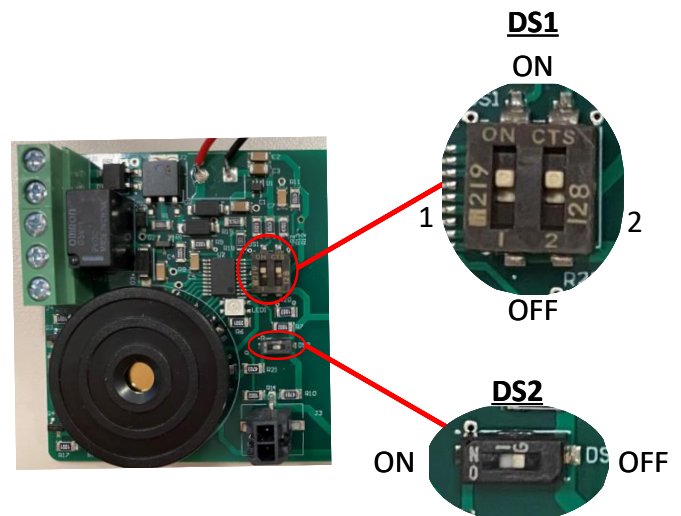


### 3. ADD OPTIONAL ITEMS

- Connect latchbolt monitor (LM) switch to alarm board
- For relay option:
  - Connect external system to relay terminals

Relay Specs	
Contact Current Rating	1A
Switching Voltage	125VAC/60VDC MAX

Nonpolar  
Power  
Terminals

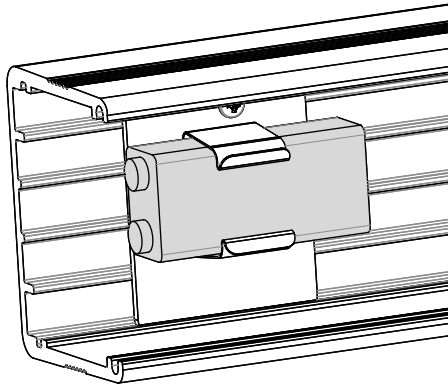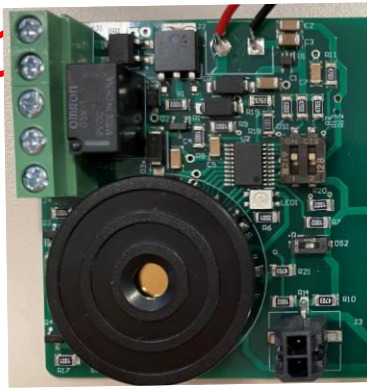


## 4. APPLY POWER TO ALARM KIT

- Complete one or both of the following:
- Add 12-24VDC/VAC to power terminals
- Install 9V alkaline battery in rail and connect to battery lead

## 5. VERIFY FUNCTION

- For fire labeled devices:
  - Verify ON and OFF positions
- For panic labeled devices
  - Verify ON and OFF positions
    - Verify OFF and DOGGED - only possible when pushbar is first depressed

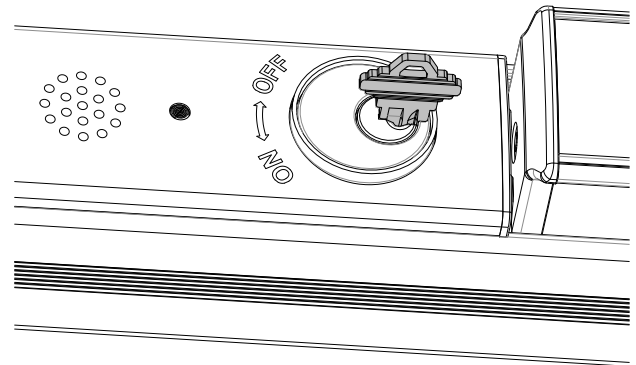

## 6. REINSTALL FILLER PLATE AND END CAP

- Ensure filler plate is flush with main rail
- Reinstall end cap
- Visit [pdqlocks.com](http://pdqlocks.com) for alarm kit datasheet

