


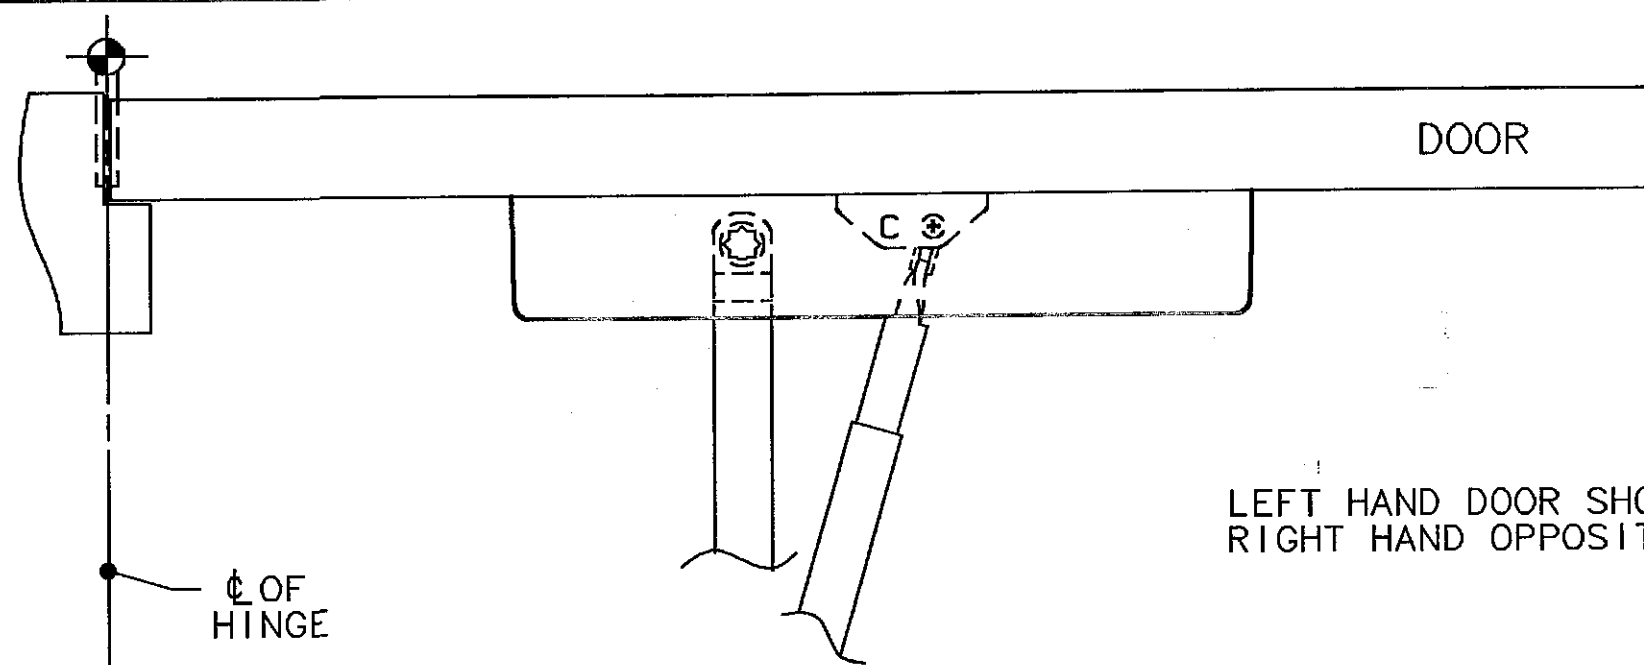

LEFT HAND DOOR SHOWN,  
RIGHT HAND OPPOSITE.

MAXIMUM DEGREE  
OF DOOR OPENING

DIM  
"A"

DIM  
"B"

120°



6  $\frac{7}{8}$ "

12  $\frac{3}{8}$ "

180°

4  $\frac{3}{4}$ "

10  $\frac{1}{4}$ "

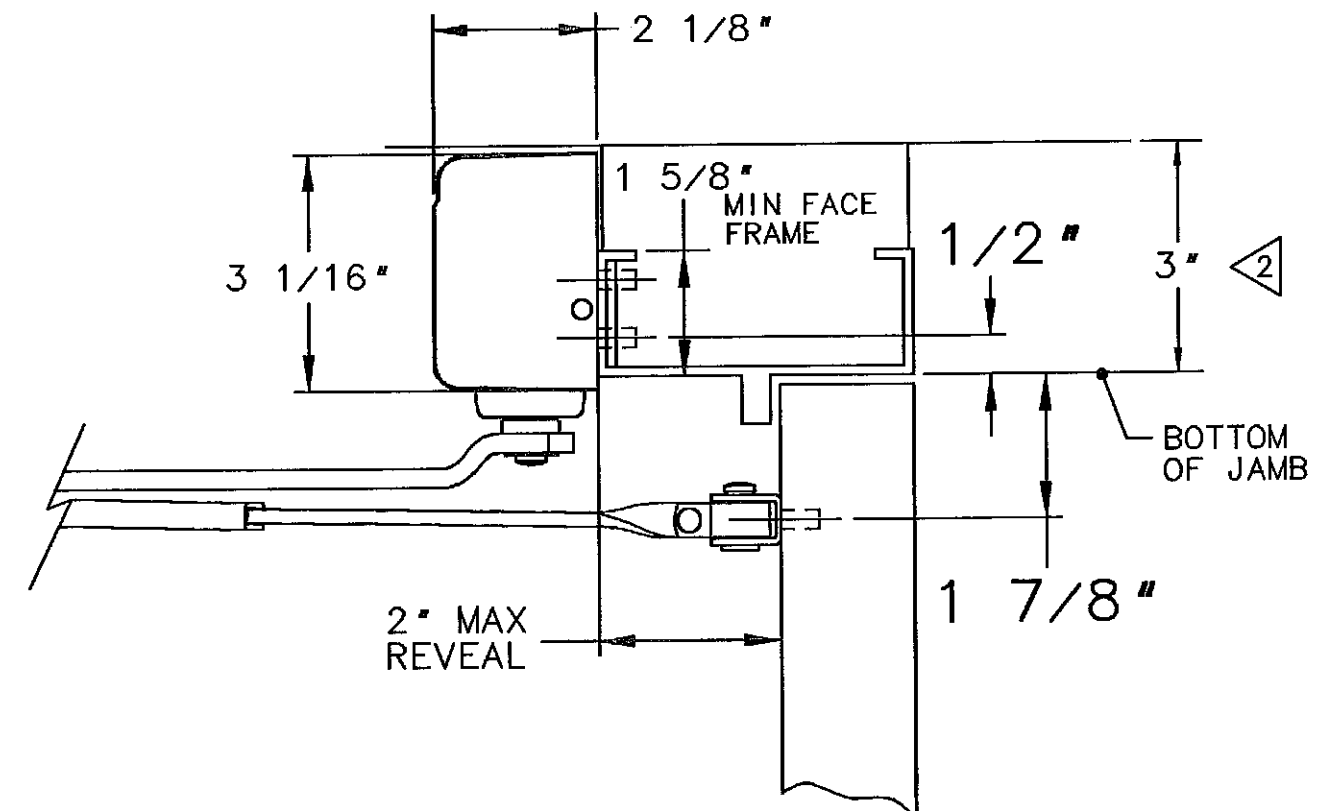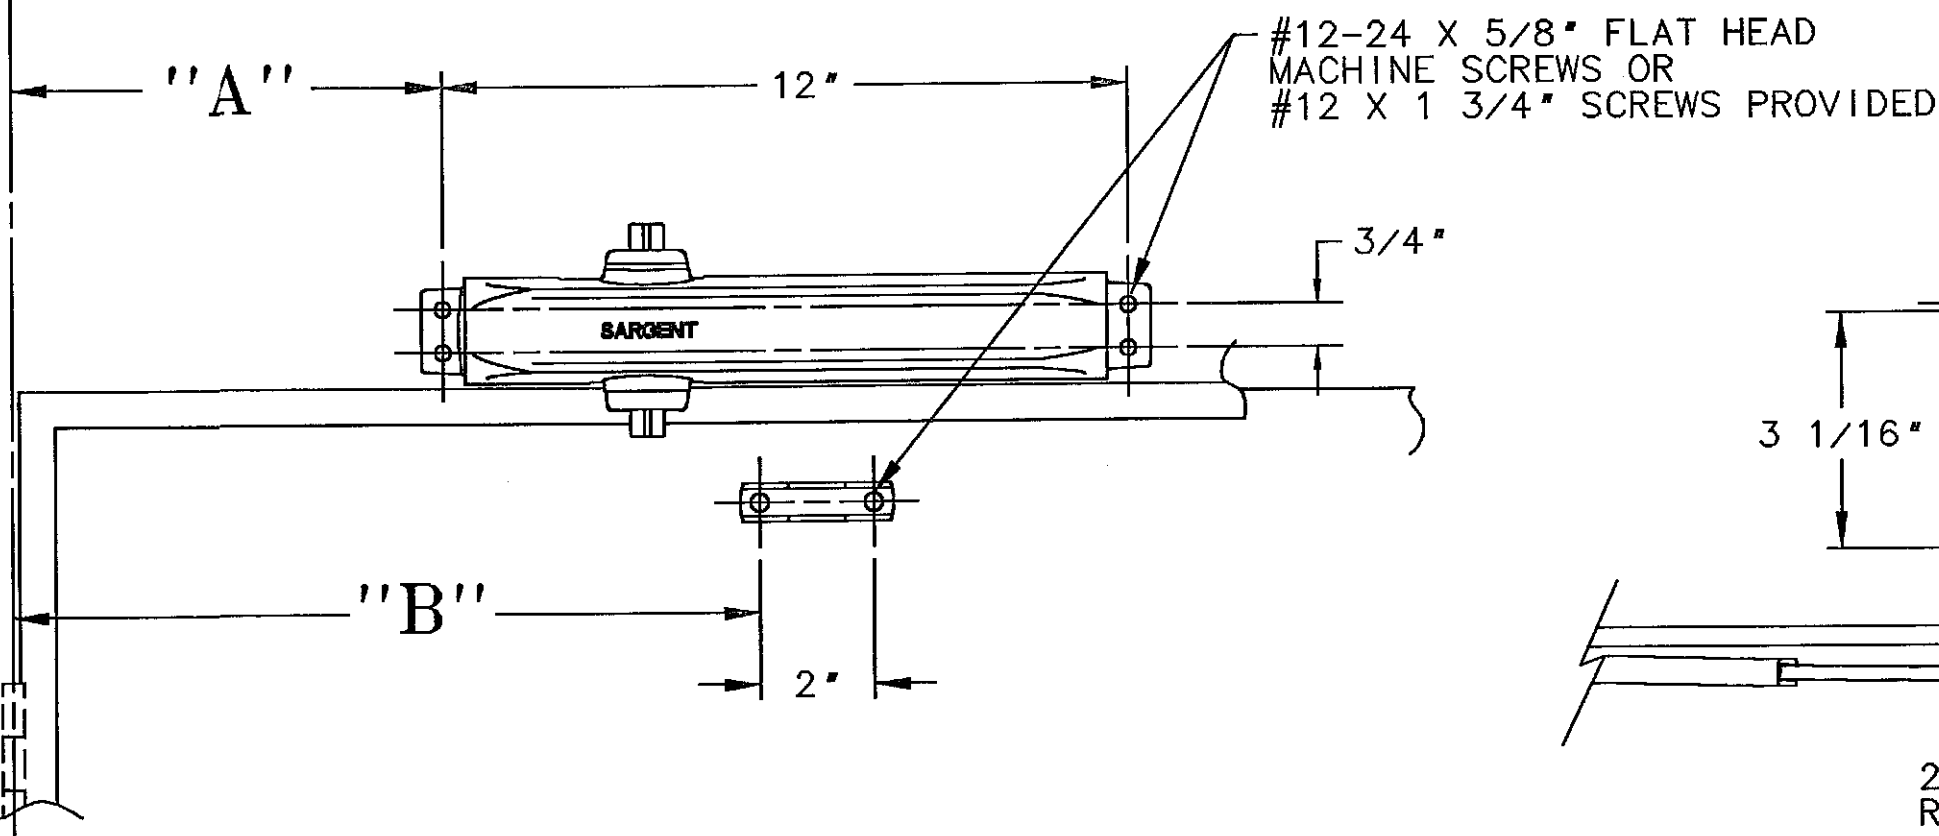

#### NOTES

1. REINFORCE METAL DOORS AND FRAMES PER ANSI A250.8 AND SDI-100 STANDARDS, 12 GAUGE RECOMMENDED.
2. FOR LOW CEILING APPLICATIONS USE A 1331-B PLATE, SEE TEMPLATE A7734.

**SARGENT® Manufacturing Company**  
100 Sargent Drive New Haven, CT 06511

DATA SHEET:  
1331 DOOR CLOSER WITH JO ARM  
- TOP JAMB APPLICATION -

RELEASE DATE  
APR-16-04  
TEMPLATE NO.  
A7730