

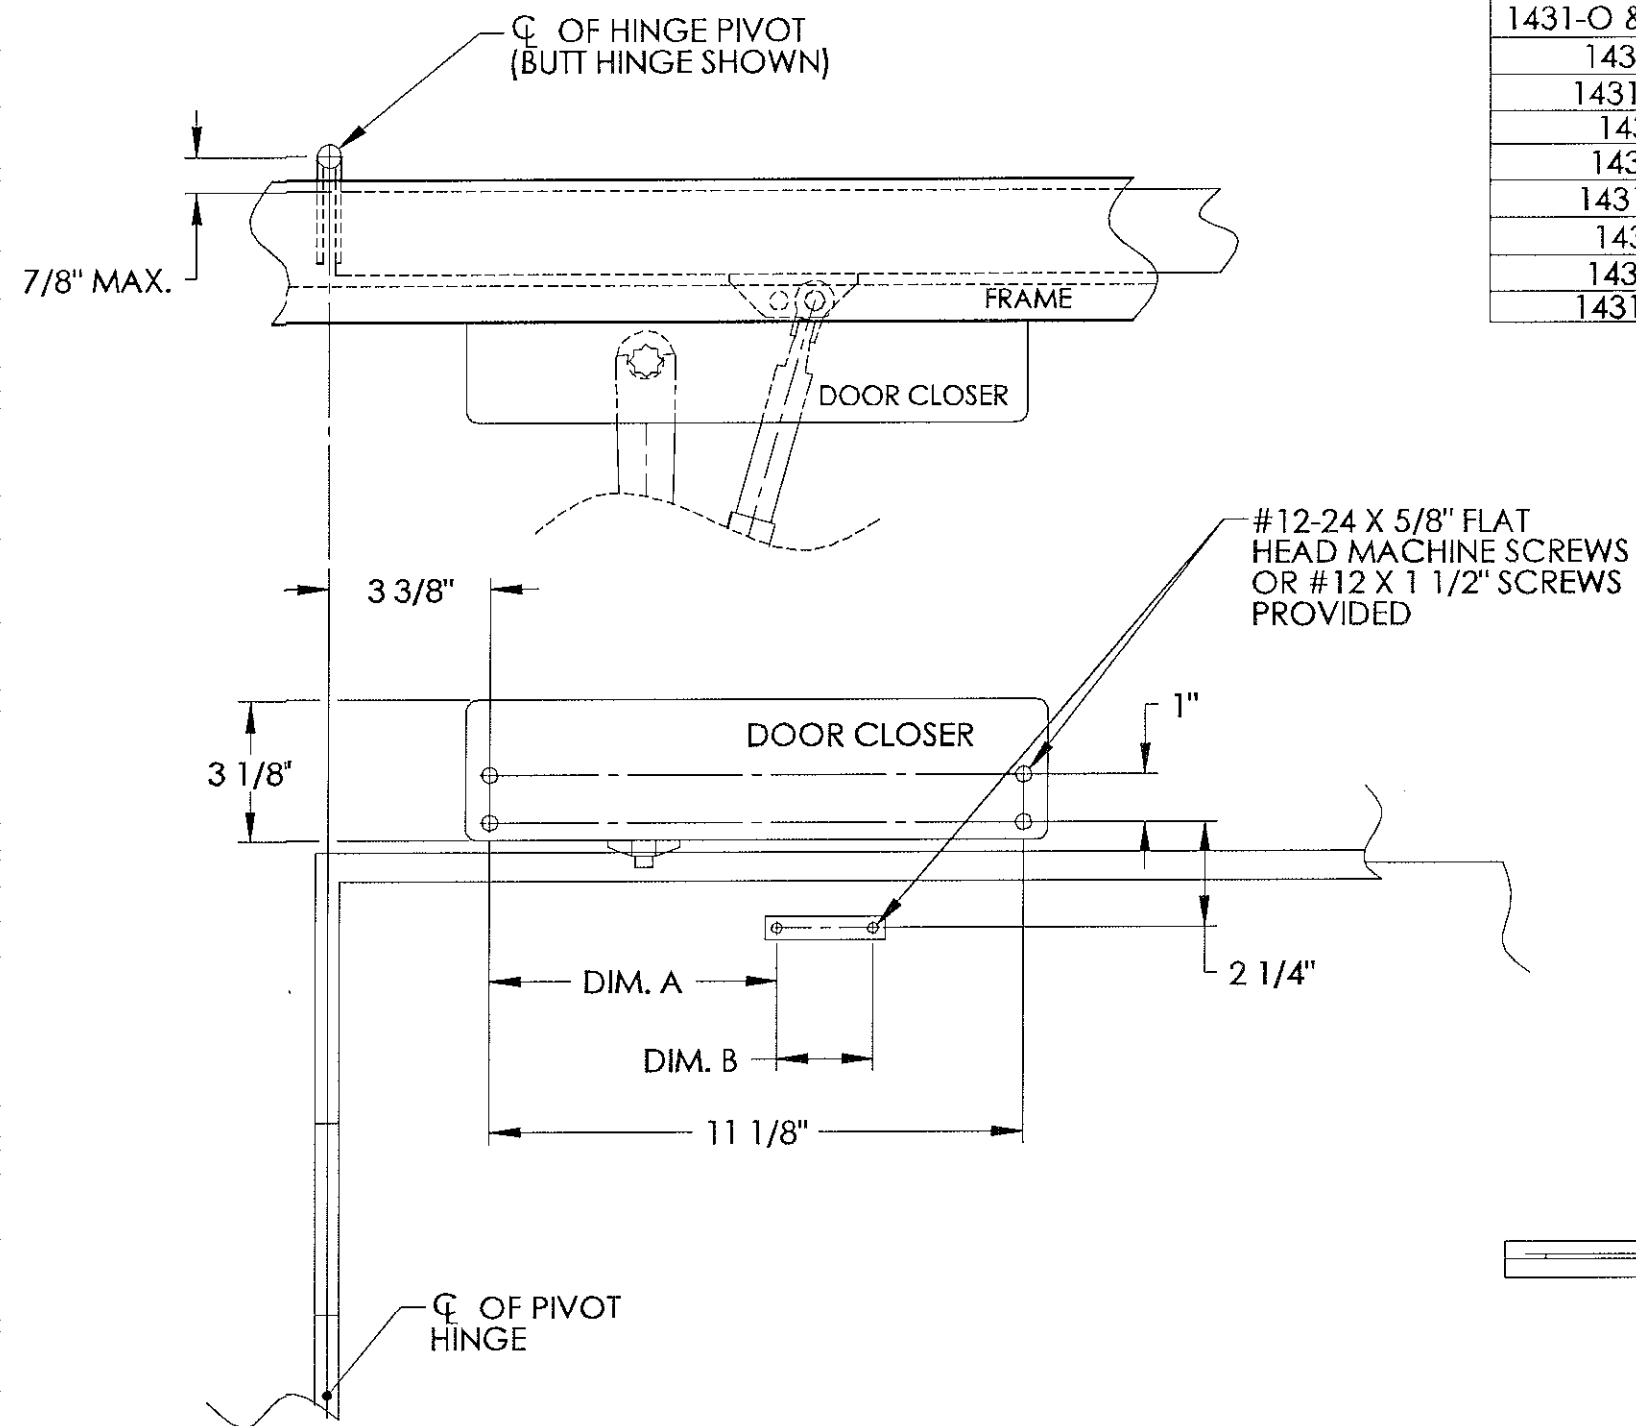


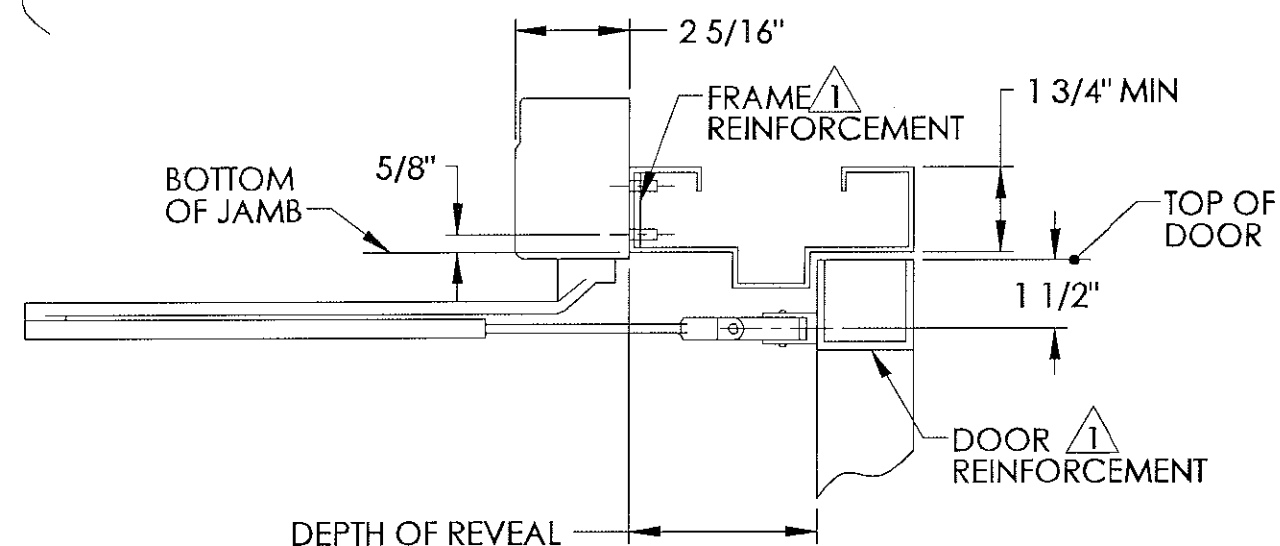

MODEL	DIM. A	DIM. B	DEPTH OF REVEAL	MAX. DOOR OPENING	RANGE OF HOLD OPEN
1431-O & 1431-RO	6"	2"	0" TO 2"	180°	
1431-OZ	6 3/4"		2 1/8" TO 5"	140°	
1431-OZA	7 1/2"		5 1/8" TO 8"	140°	
1431-F	6"	2"	0" TO 2"	140°	80° - 130°
1431-FZ	6 3/4"		2 1/8" TO 5"	140°	
1431-FZA	7 1/2"		5 1/8" TO 8"	140°	
1431-H	5 3/4"	2 1/2"	0" TO 2"	180°	80° - 180°
1431-HZ	6 1/2"		2 1/8" TO 5"	140°	80° - 140°
1431-HZA	7 1/4"		5 1/8" TO 8"	140°	80° - 130°

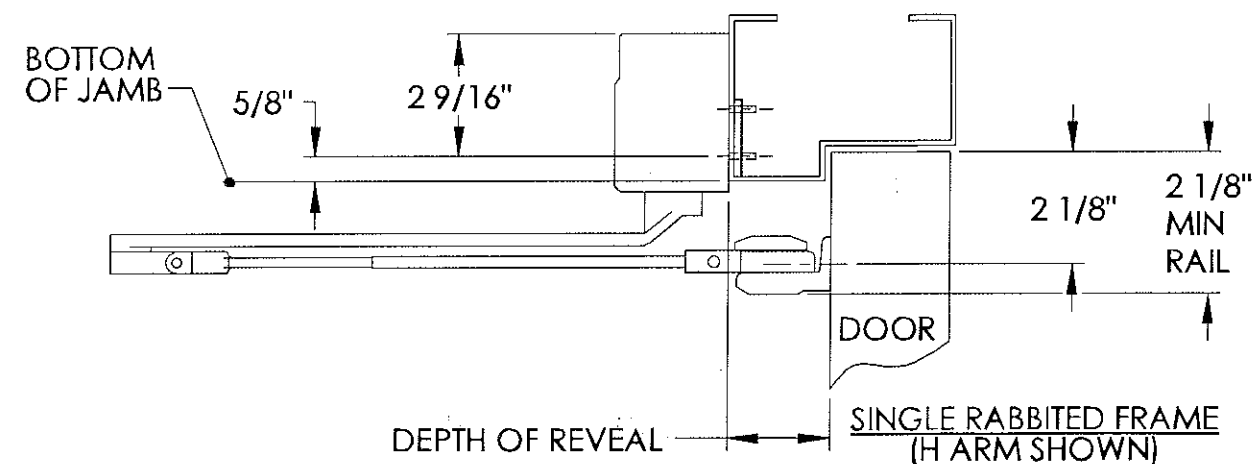

NOTES:

- REINFORCE METAL DOORS AND FRAMES PER ANSI A250-8 AND SDI-100 STANDARDS, 12 GAGE RECOMENDED.
- LEFT HAND DOOR SHOWN, RIGHT HAND OPPOSITE.

DOUBLE RABBITED FRAME (O ARM SHOWN)

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

1431 TOP JAMB APPLICATION WITH
O, RO, H & F SERIES ARMS.

RELEASE DATE
9 August 06
TEMPLATE NO.
A7144 B