



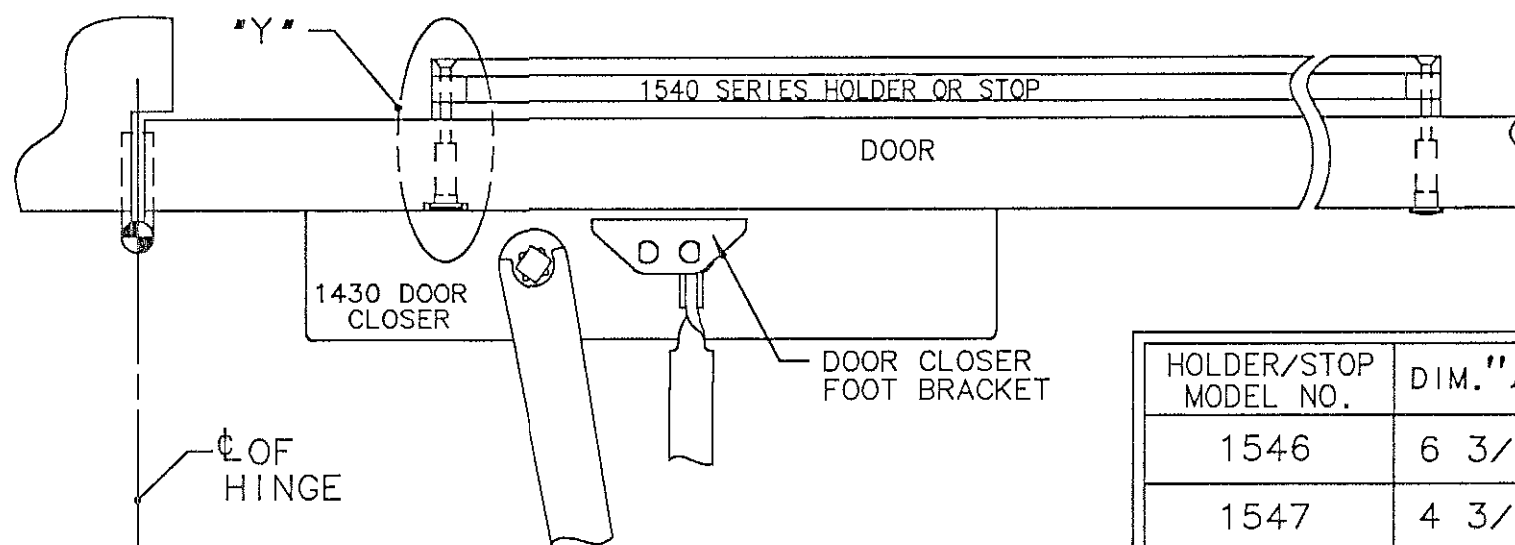


HOLDER/STOP MODEL NO.	DIM. "A"	DIM. "B"
1546	6 3/4"	12 1/8"
1547	4 3/4"	10 1/8"
1548	4 3/4"	10 1/8"
1549	6 3/4"	12 1/8"

RIGHT HAND DOOR SHOWN
LEFT HAND OPPOSITE

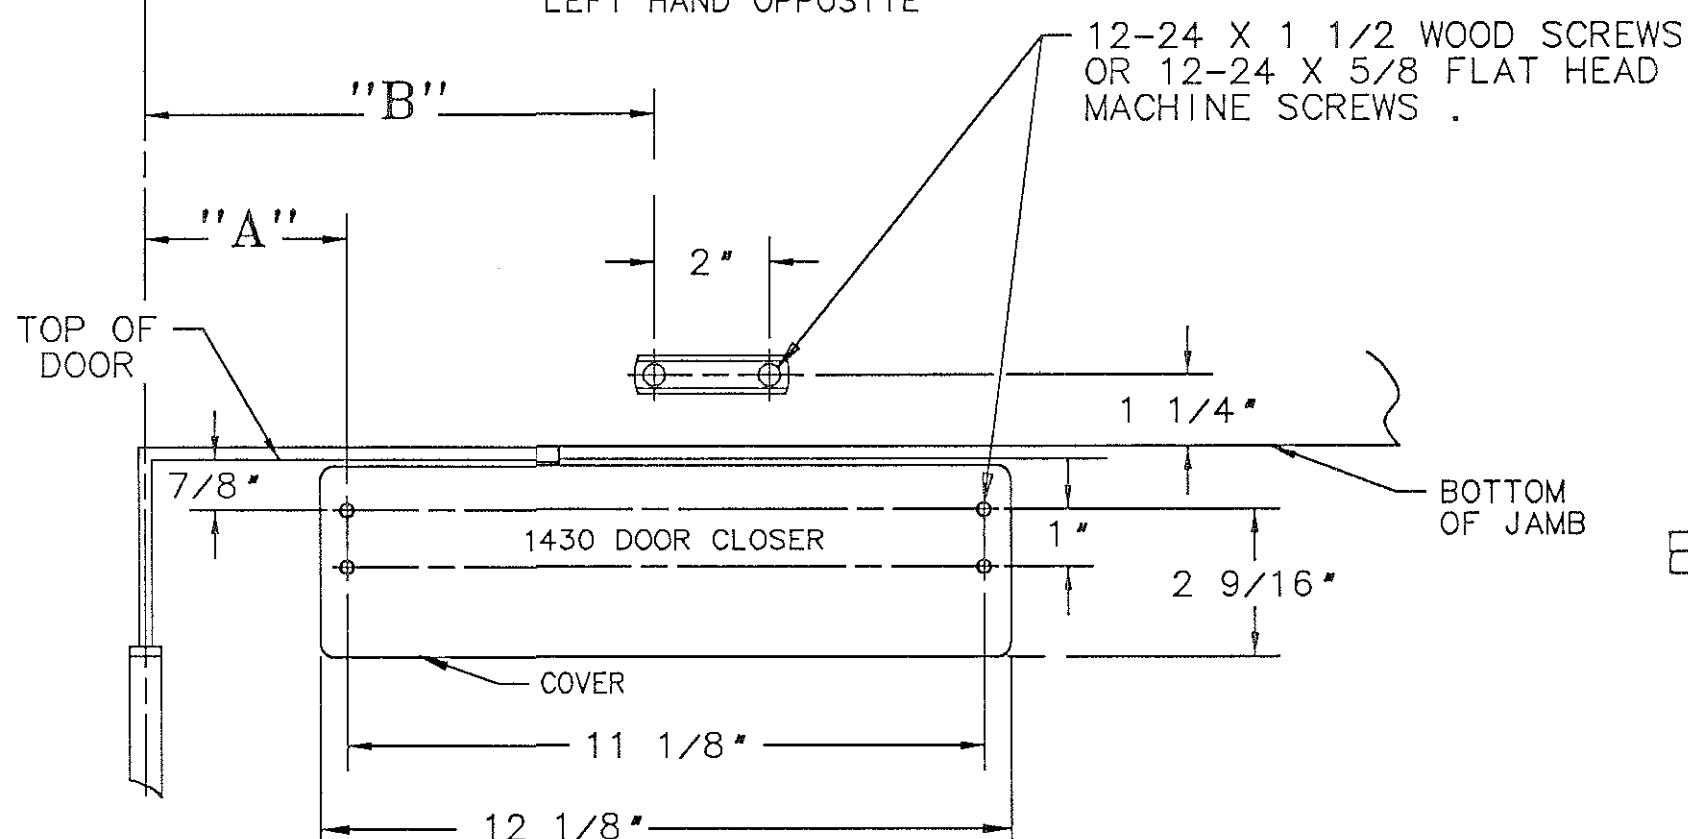


WHEN THRU-BOLTING DOOR CLOSER,
THE TOP MORTISE NUTS MAY
HAVE TO BE RECESSED.

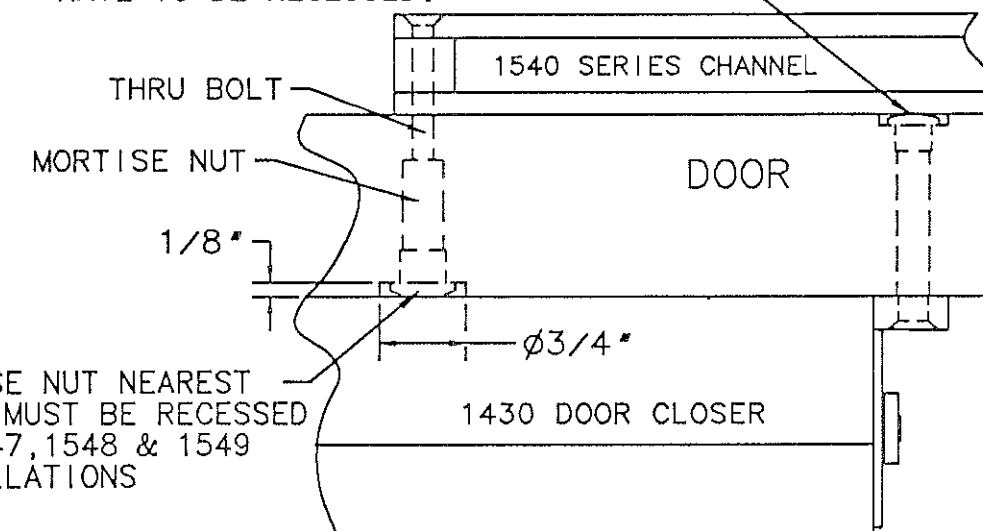

VIEW "Y"

MORTISE NUT HEADS MUST BE RECESSED
INTO DOOR WHEN CONFLICTS OCCUR.

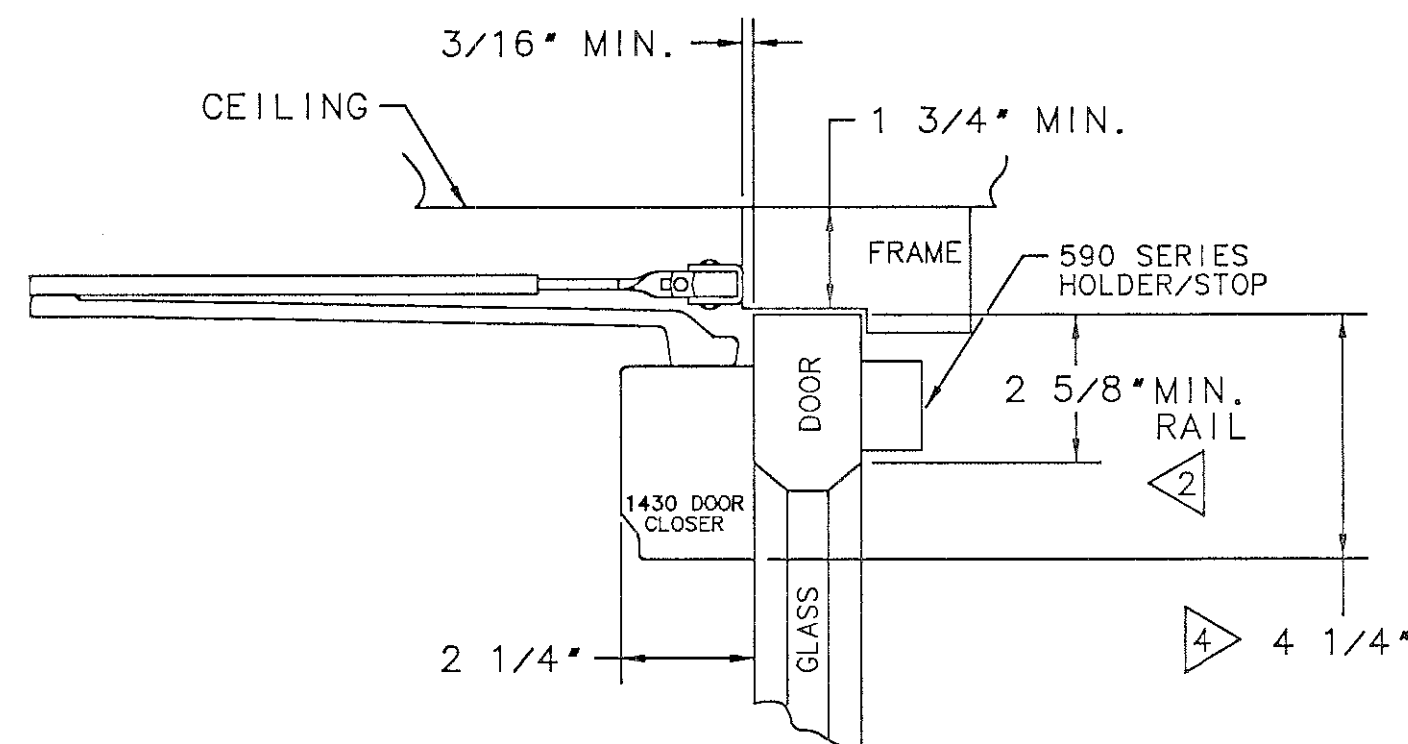

NOTES

1. REINFORCE METAL DOORS & FRAMES PER ANSI A250.8 AND SDI-100 STANDARDS, 12 GAUGE RECOMMENDED.
2. FOR THIN TOP RAIL DOORS, USE 1430-D DROP PLATE, SEE TEMPLATE A7168A.
3. FOR 1546-1549 INSTALLATION, SEE TEMPLATES A7488 - A7490.
4. 1430-J COVER PLATE MAY BE USED WHEN CLOSER IS VISIBLE THROUGH GLASS.

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DATA SHEET: 1430 SERIES DOOR
CLOSER WITH STANDARD APPLICATION
O & RO ARM AND 1546-1549 SERIES
HOLDER OR STOP

EFFECTIVE DATE

APRIL 02

TEMPLATE NO.

A7552 B