

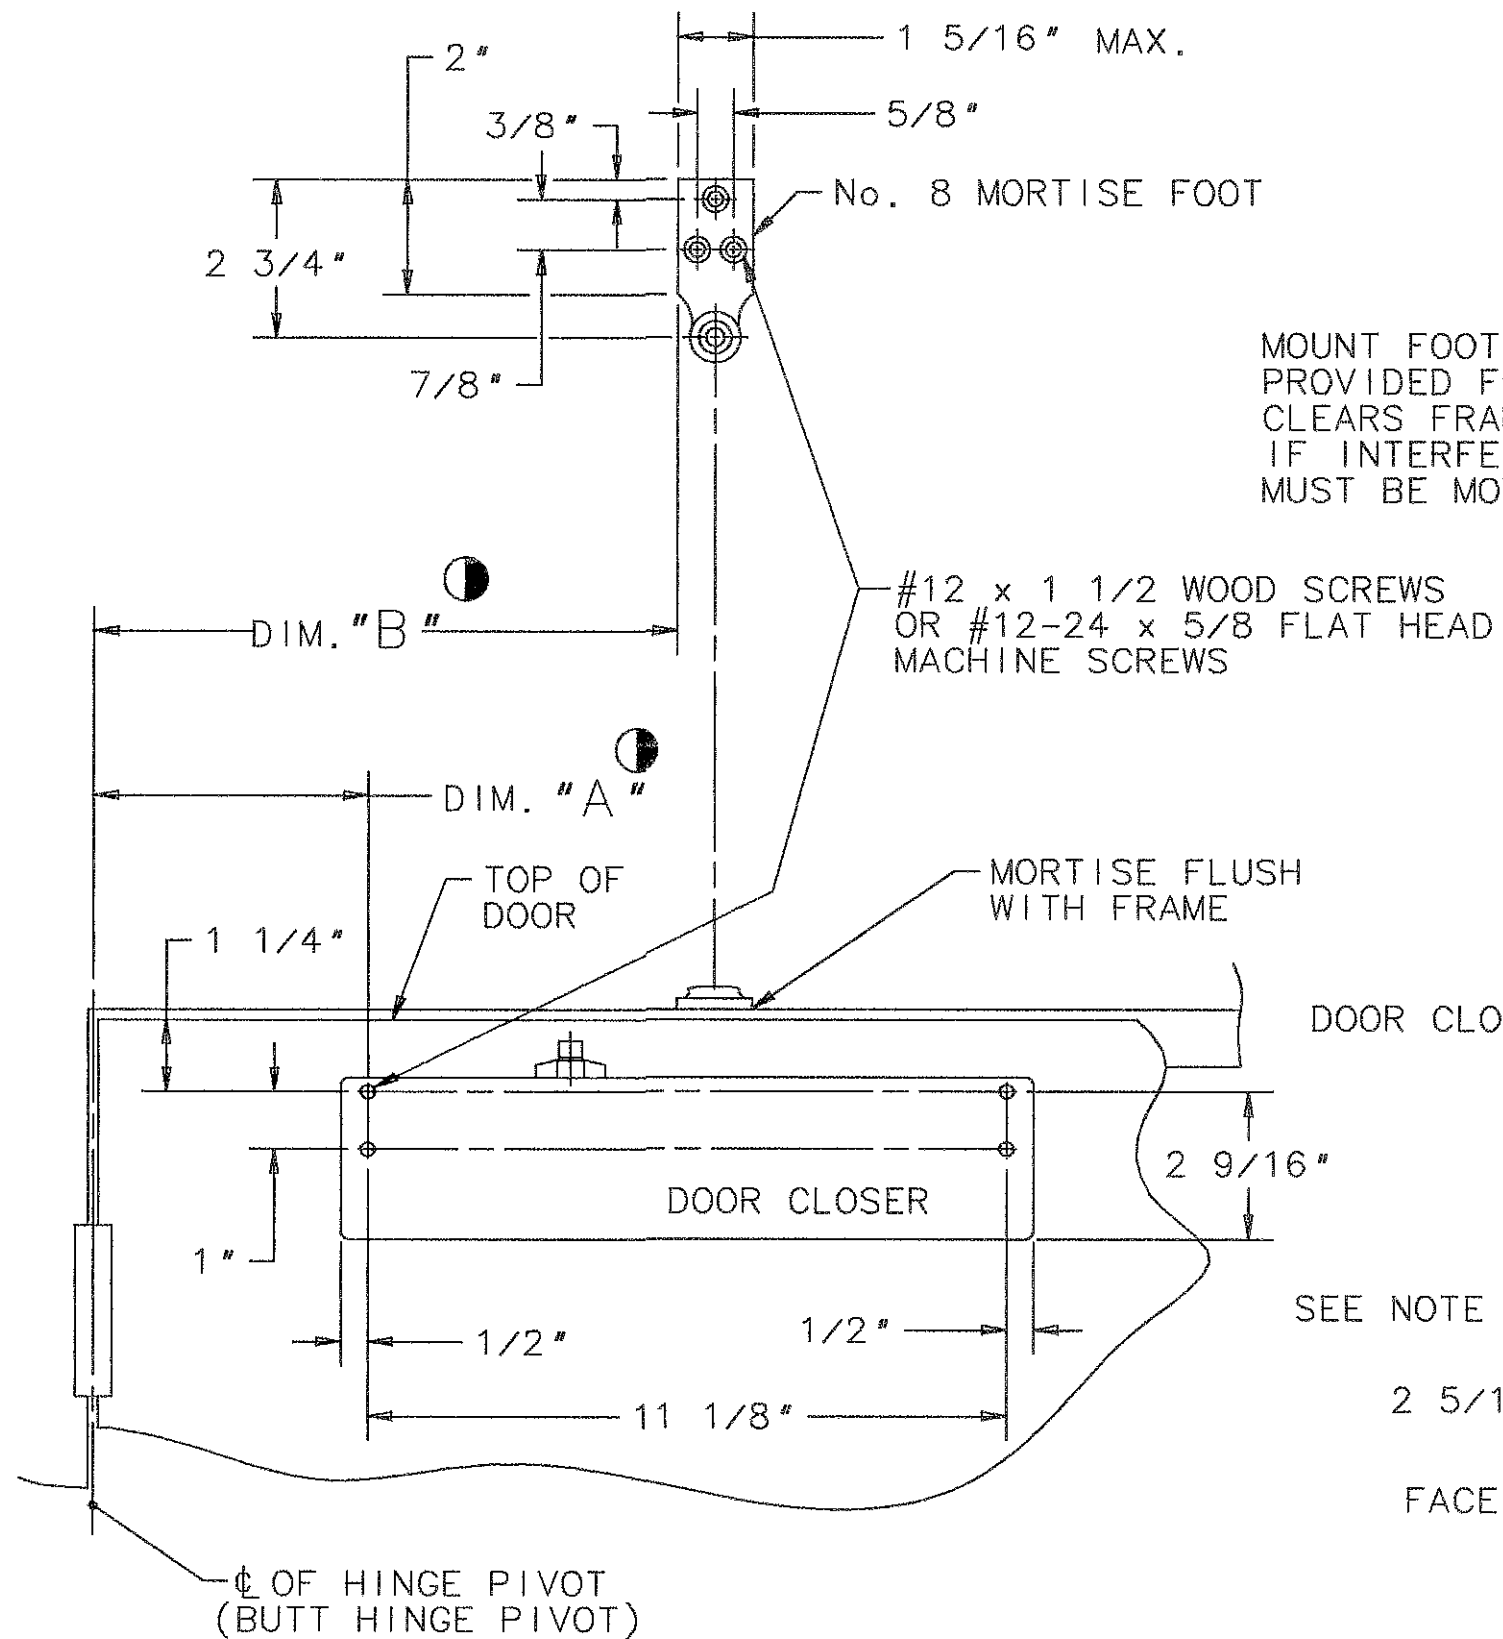


08 TYPE ARM ASSEMBLY SHOWN
F8 TYPE ARM SIMILAR

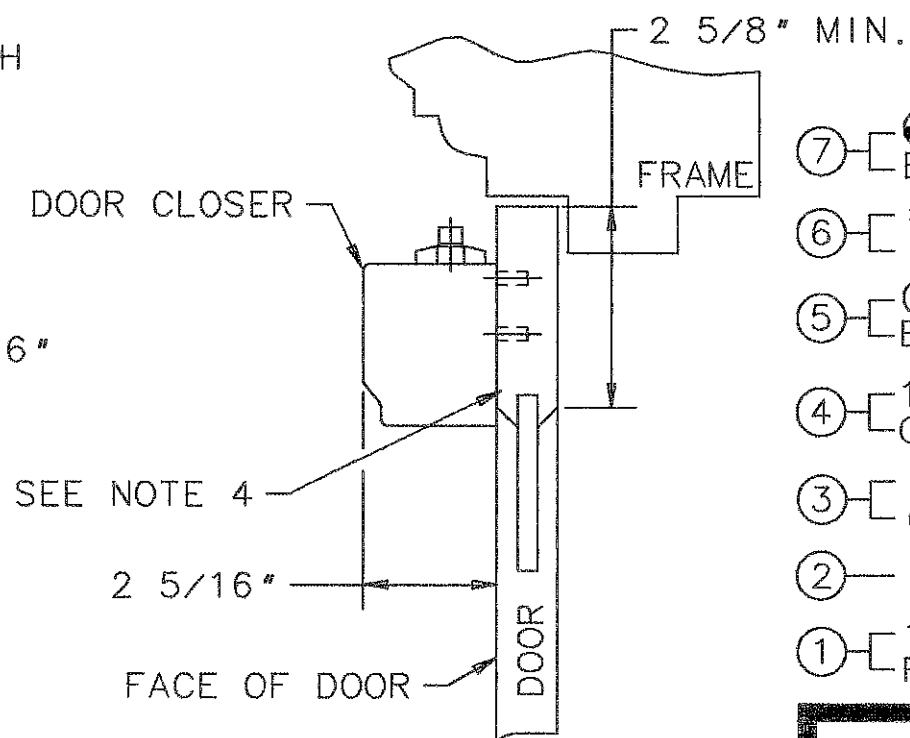

MOUNT FOOT FLUSH WITH STOP —
PROVIDED FOOT ASSEMBLY
CLEARS FRAME AT THIS POINT —
IF INTERFERENCE OCCURS, FOOT
MUST BE MOVED AWAY FROM STOP

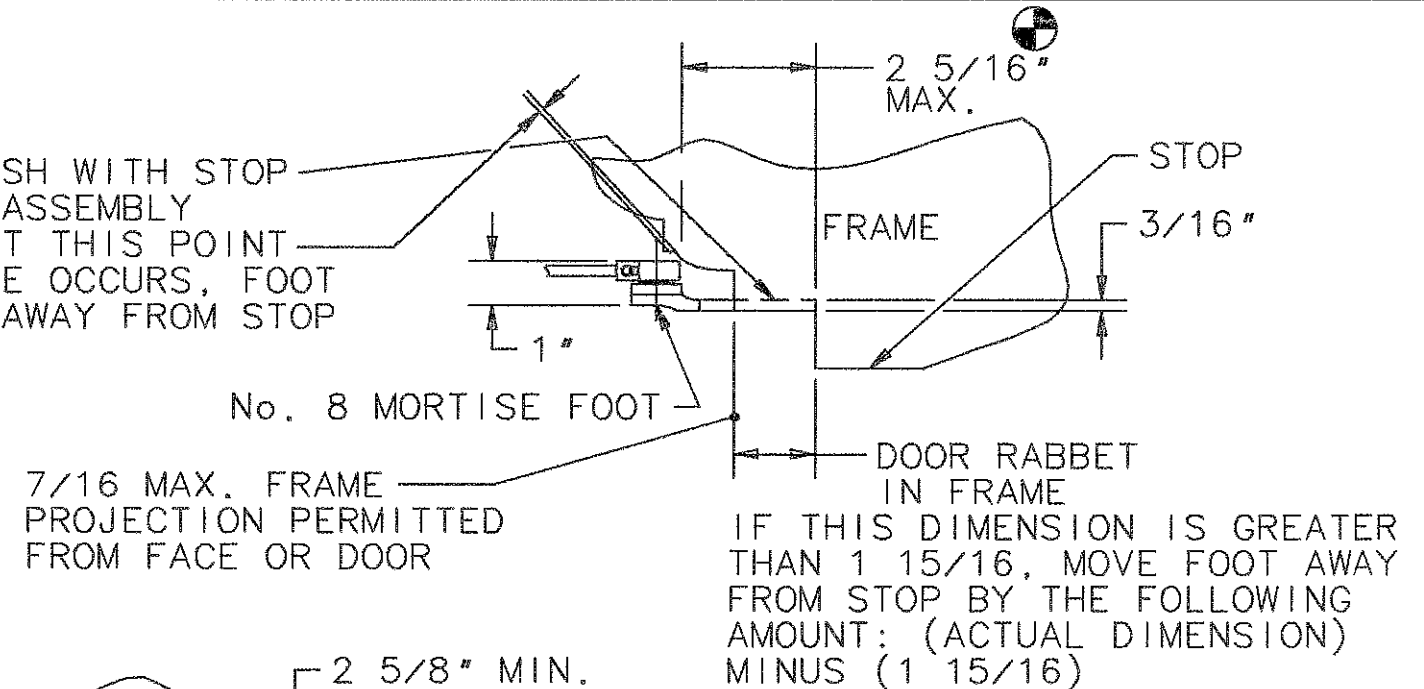

- ⑦ —  IF INTERFERENCE OCCURS, FOOT MUST BE MOVED AWAY FROM STOP.
- ⑥ — *FUSIBLE LINK ARM ASSEMBLY IS HANDED AND MUST BE SAME HAND AS DOOR.
- ⑤ —  THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.
- ④ — 1430-J COVER PLATE MAY BE USED WHEN CLOSER IS VIEWED THRU GLASS PANEL.
- ③ —  IF BUTT, FRAME AND WALL CONDITIONS PERMIT, CLOSER WILL ALLOW DOOR TO OPEN 180°.
- ② — RIGHT HAND DOOR SHOWN. LEFT HAND OPPOSITE.
- ① — 12 GAUGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS & FRAMES.

IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING							
ARM TYPE	DESCRIPTION	STANDARD MOUNT			ALTERNATE MOUNT		
		DIM. A	DIM. B	MAXIMUM DOOR OPENING	DIM. A	DIM. B	MAXIMUM DOOR OPENING
O8	REGULAR ARM	6 3/4"	12 1/8"	120°	4 3/4"	10 1/8"	160°
F8*	90° HOLD OPEN FUSIBLE LINK			110°			135°