

# This operation guide describes the basic functions of your IX Series Master Station

For a complete operation manual (5 MB), scan QR code or use link to download it from the manufacturer's website: [www.aiphone.com/ix-mv\\_op-man](http://www.aiphone.com/ix-mv_op-man)




## Operation Buttons

 Push and hold the PRIVACY button to mute the microphone when AUTO ANSWER is off (the caller can still be heard through the speaker). When AUTO ANSWER is on, privacy will mute the microphone until the TALK button is pushed or the handset is lifted.

 Push the TRANSFER button to manually send an answered call to another master station within the address book (an orange LED on the button blinks when transferring). To automatically send incoming calls to another master station within the address book (ABSENT TRANSFER), use the SETTING button to program a transfer destination. Once programmed, push the TRANSFER button to toggle this feature on or off (an orange LED on the button remains lit when the feature is activated).

 Push the LIST button to view stations and groups within the address book. Use the cursor control and enter buttons to make selections.

 Push the SETTING button to view all setting options for your specific master station. Use the cursor control and enter buttons to make selections. A status icon appears on screen when a function is in operation (see chart below).

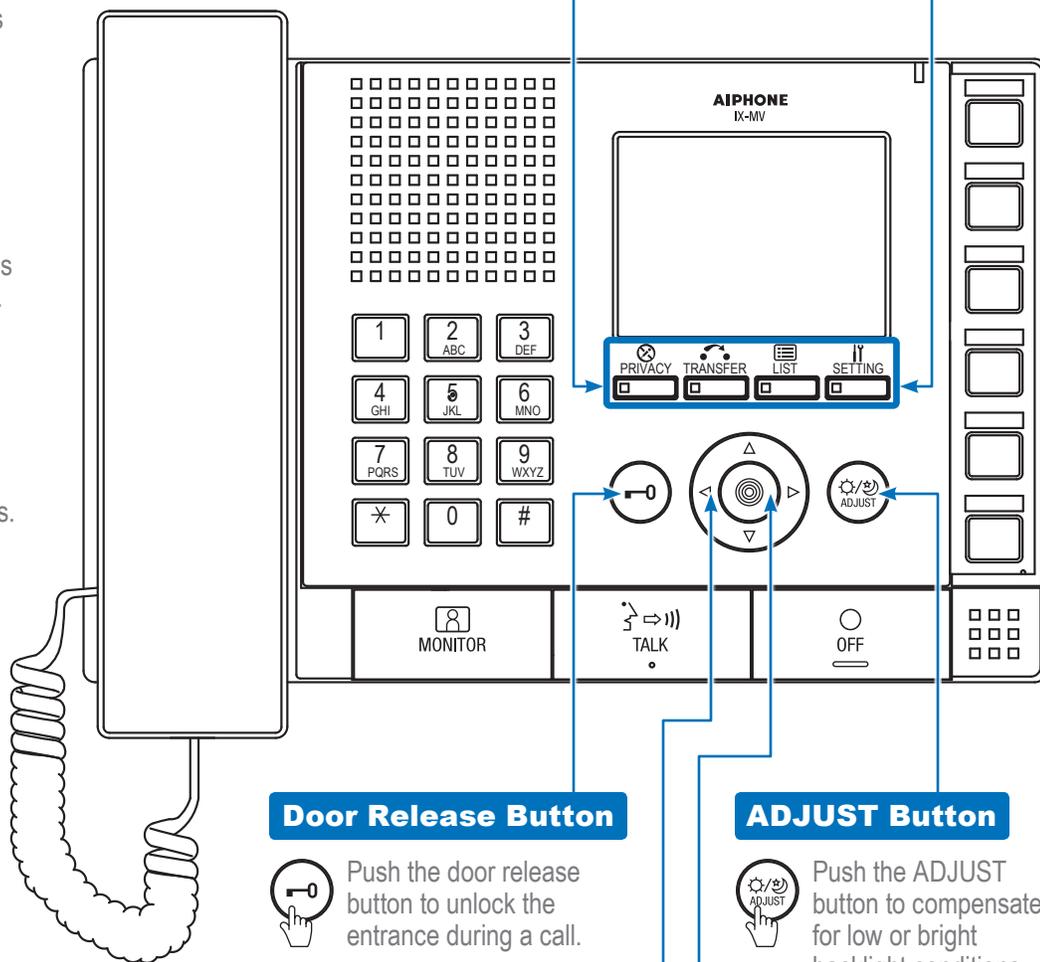

Icon	Status
	Communication in progress (G=Normal Y=Priority R=Urgent)
	Incoming/Outgoing call in progress (G=Normal Y=Priority R=Urgent)
	Receiving calls in queue (002=2 stations calling)
	Incoming/Outgoing page in progress (G=Normal R=Urgent)
	Microphone on (PRIVACY mode off)
	Microphone off (PRIVACY mode on)
	On-hold, call transferring
	Monitoring in progress
	Door release activated (unlocking)
	Settings screen is displayed
	Screen adjustment in progress
	Search in progress
	An error has occurred
	Processing selected function

### Door Release Button

 Push the door release button to unlock the entrance during a call.

### ADJUST Button

 Push the ADJUST button to compensate for low or bright backlight conditions when viewing video from a door station.

### Cursor Control Button

 Push  $\Delta$ ,  $\nabla$ ,  $\leftarrow$ , or  $\rightarrow$  to control the cursor when making menu selections.

### Enter Button

 Push the enter button to make a menu selection.

# This operation guide describes the basic functions of your IX Series Master Station


For a complete operation manual (5 MB), scan QR code or use link to download it from the manufacturer's website: [www.aiphone.com/ix-mv\\_op-man](http://www.aiphone.com/ix-mv_op-man)



## Cursor Control and Enter Buttons



See "IX-MV Operation Guide | 1 of 2" to read how the cursor control and enter buttons operate.

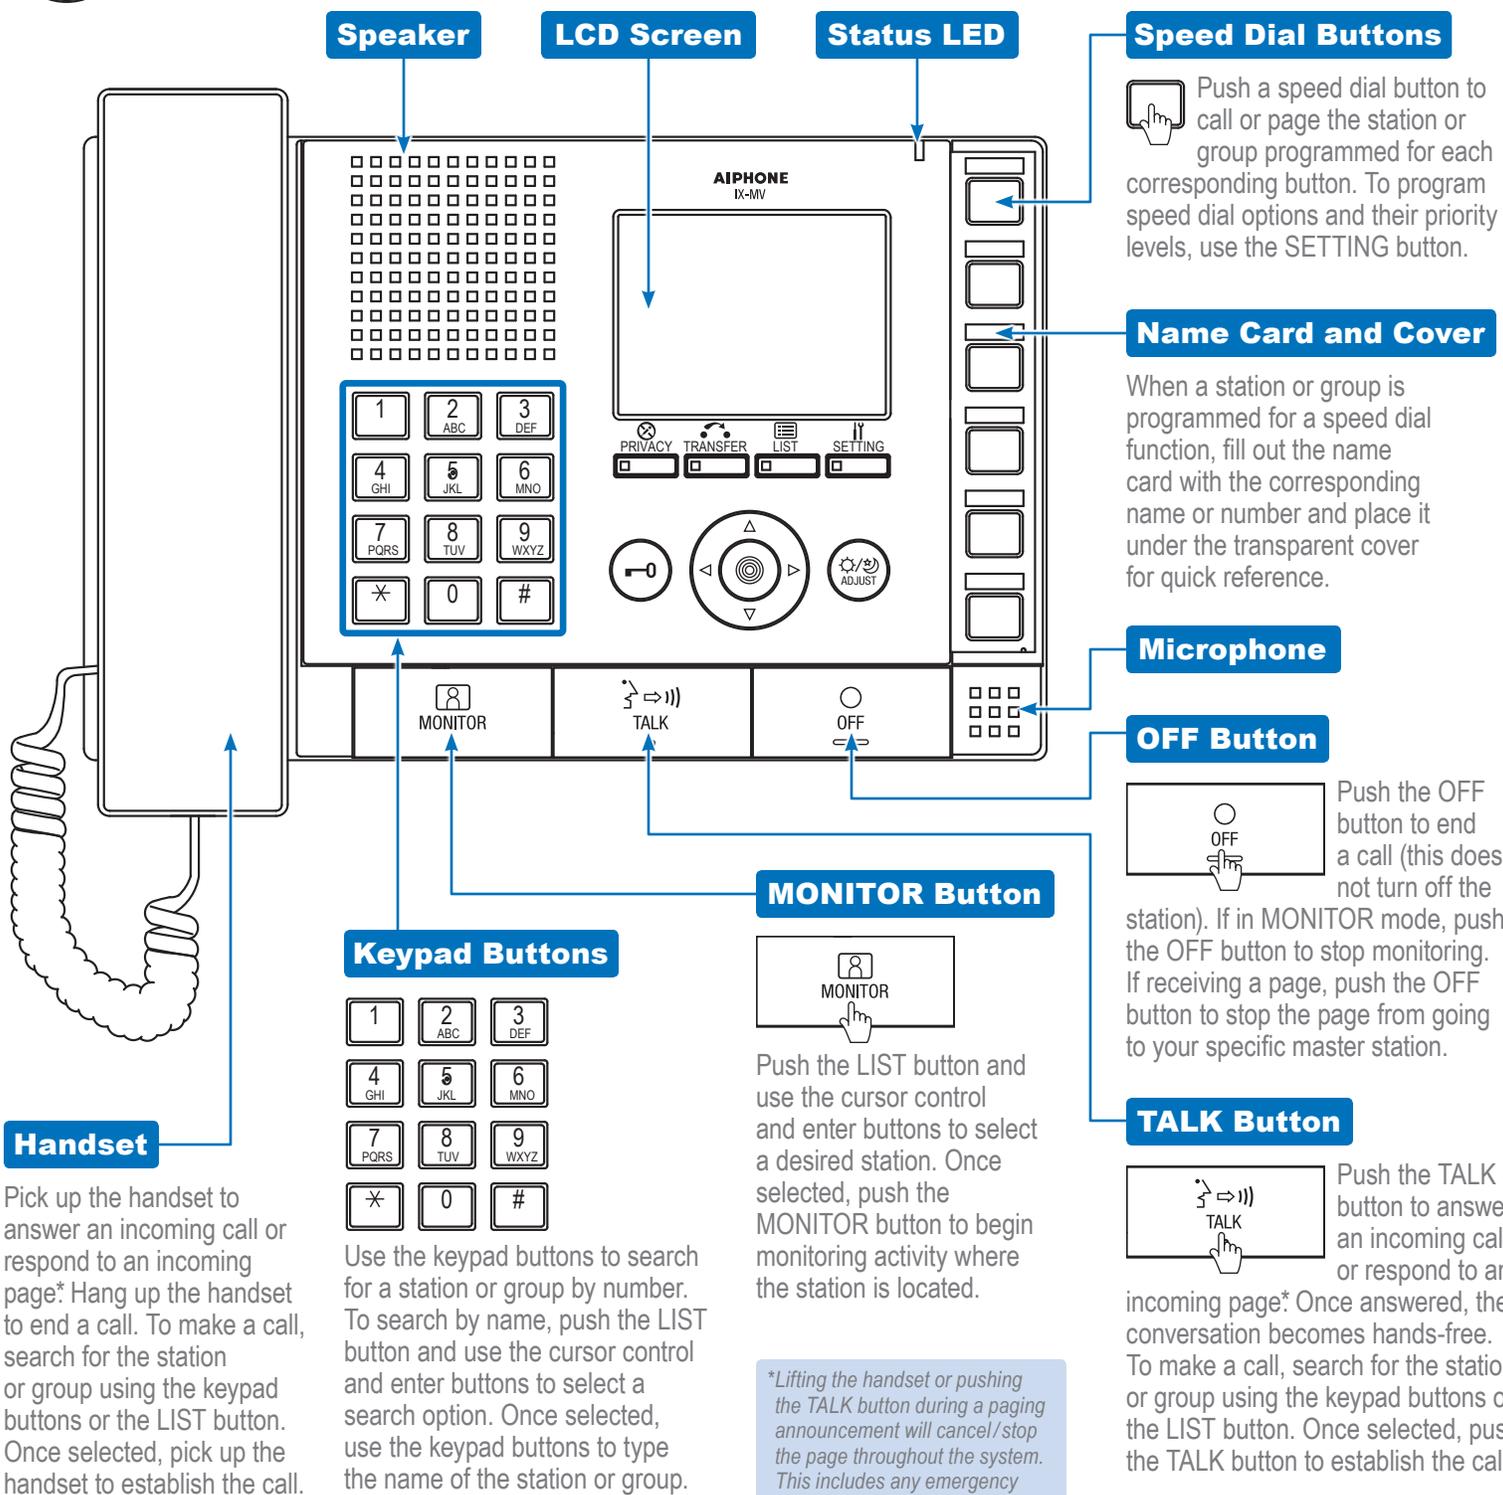

\*Lifting the handset or pushing the TALK button during a paging announcement will cancel/stop the page throughout the system. This includes any emergency paging notifications or alerts.