


2400LR

Ligature Resistant Electromagnetic Door Holder


Ligature resistant electromagnetic hold open.
 For use in behavioral health facilities, hospitals, correctional facilities,
 or any institution where safety is of the highest priority.



6° adjustment built
 in for maximum flexibility for
 uneven wall conditions.

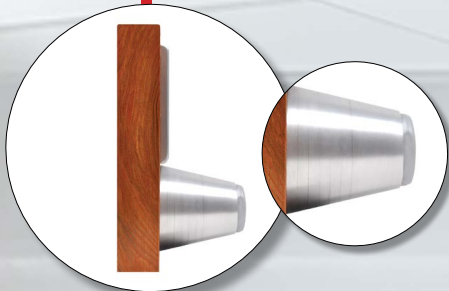

Sloped Door Armature
 Assembly with Extension
 Plates - 3" Projection

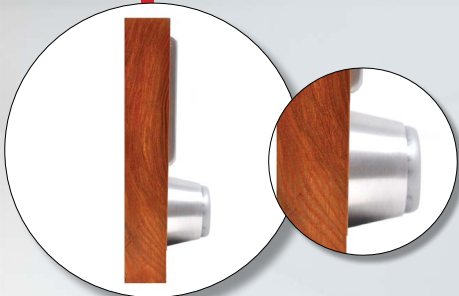

Sloped Door Armature
 Assembly without
 Extension Plates -
 1-1/2" Projection

Sloped Wall
 Magnet



Side View

Technical Specifications:

- Wall cover has 9/32" projection
- Standard 1-1/2" Door Armature with the option to add extensions
- (6) 1/4" ring extensions (provided)
- Door Armature Head has 6° adjustment built in for maximum flexibility for uneven wall conditions
- Wall Cover and Door Armature sloped to prevent objects from being tied or looped around them
- Available in US28, S1, S2, S3, S4, S5, S8 Finishes



Exploded Door
 Armature Assembly