

Electromagnetic Door Holder


2100T/2300T/2600T

Door Holder with Timer



Designed to temporarily hold doors open for storage rooms, areas with heavy cart traffic or to facilitate the movement of wheelchairs or beds.

Activation Button

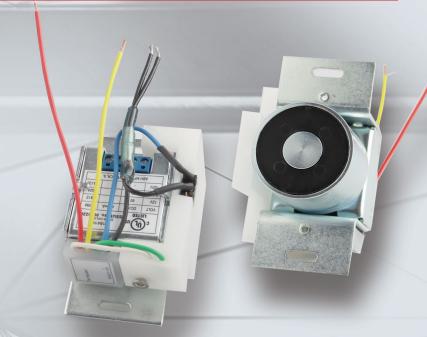

Standard Features

- Built in timer, preset to hold doors open for 3 minutes from the time of activation.
- Activation is achieved by depressing the built-in activation push button
- Tri-Voltage Units for easy installation 12V DC, 24 AC/DC or 120V AC
- Provided with one complimentary 1" extension-No Charge
- 35 lbs. holding force
- Armature features two pivot points which each have 360° mobility to help door alignment and reduce residual magnetism
- Available for the 2100 Recess Wall Mounted, 2300 Surface Wall Mounted and 2600 Floor Mounted Series Electro-Magnetic Door Holders.
- Finishes: US28 (Standard), S1, S2, S3, S4, S5, US32D, US32