
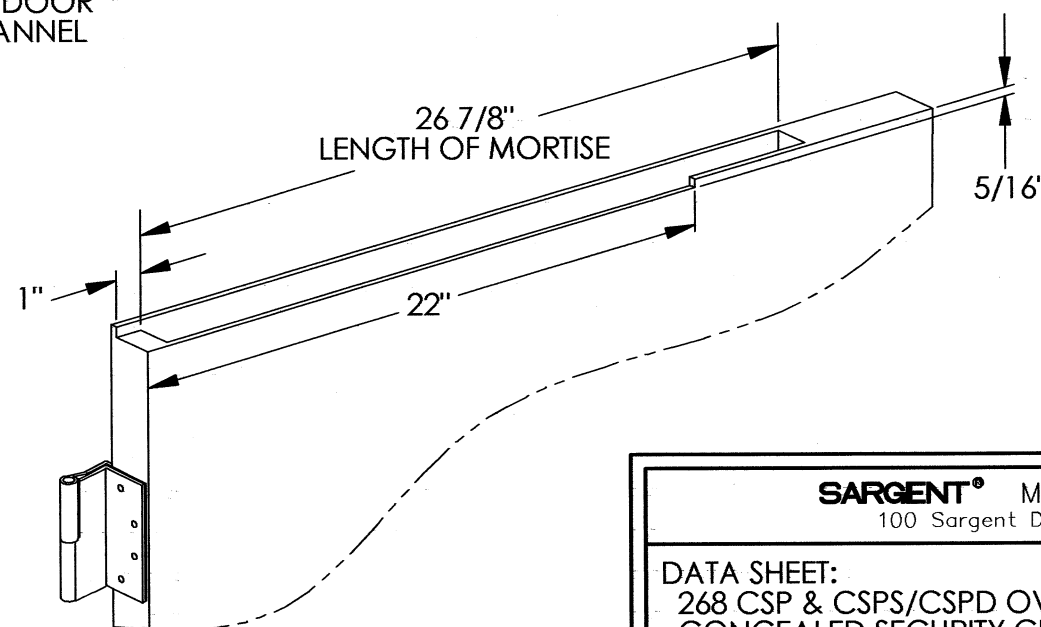
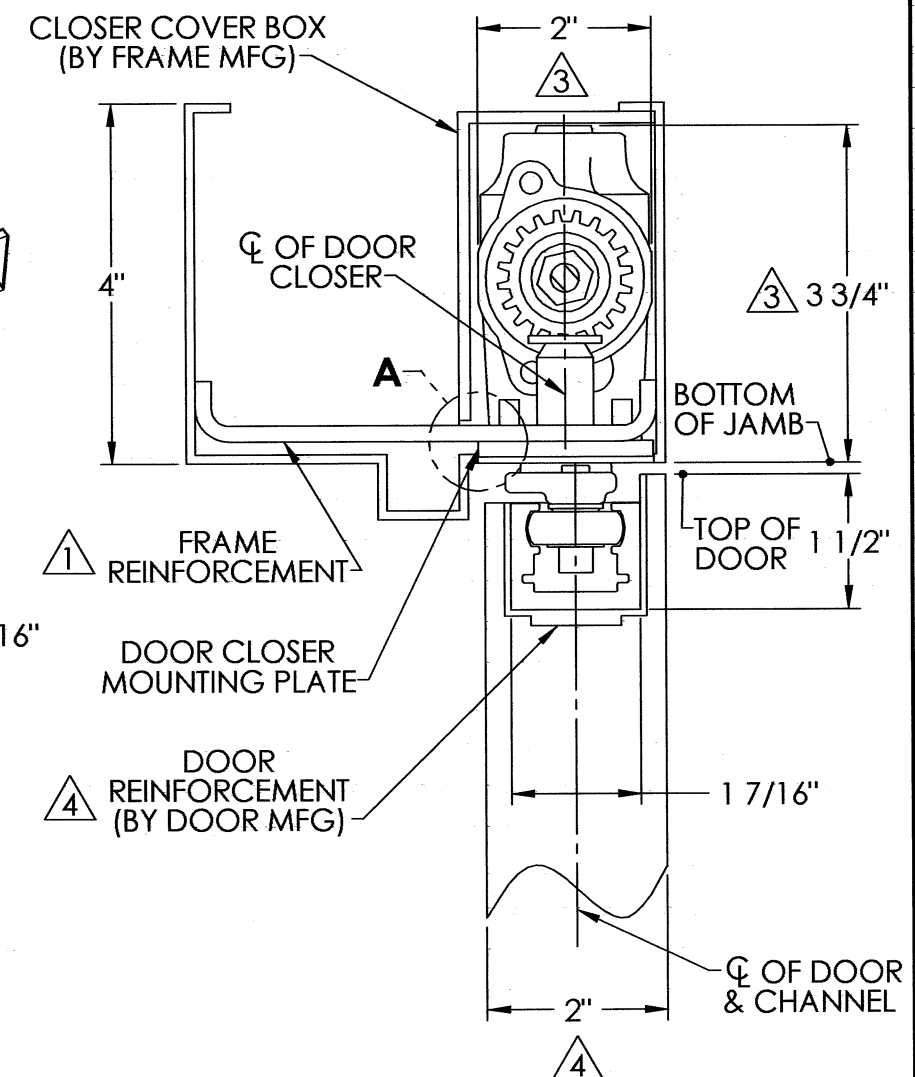
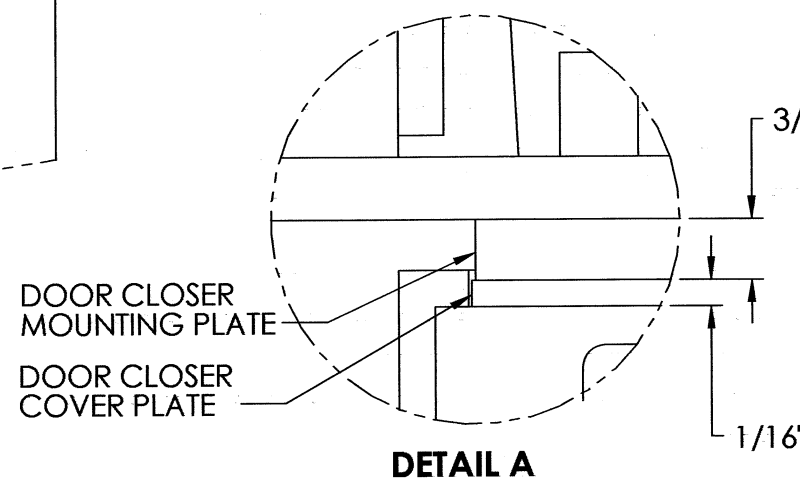
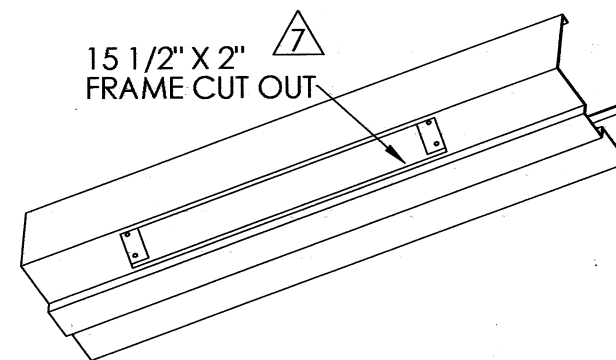
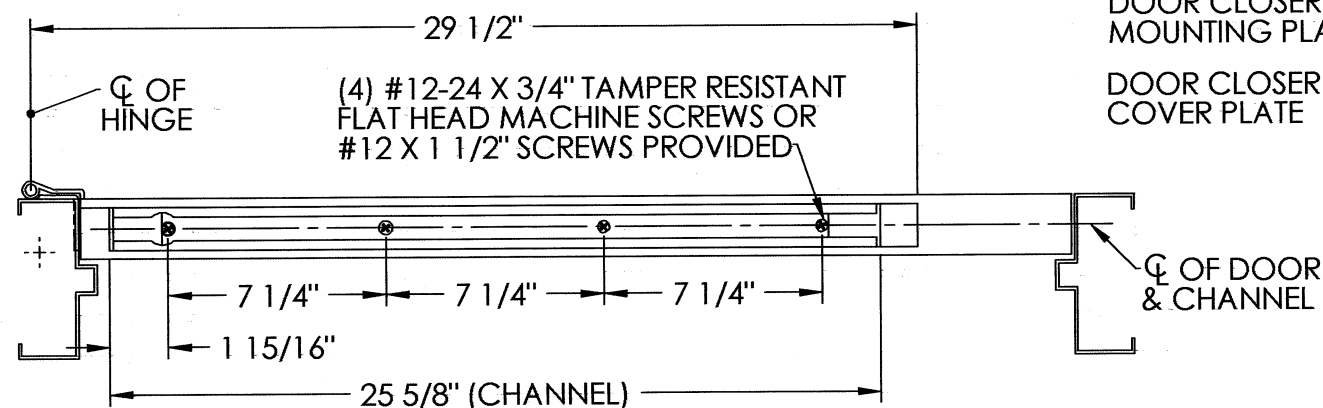
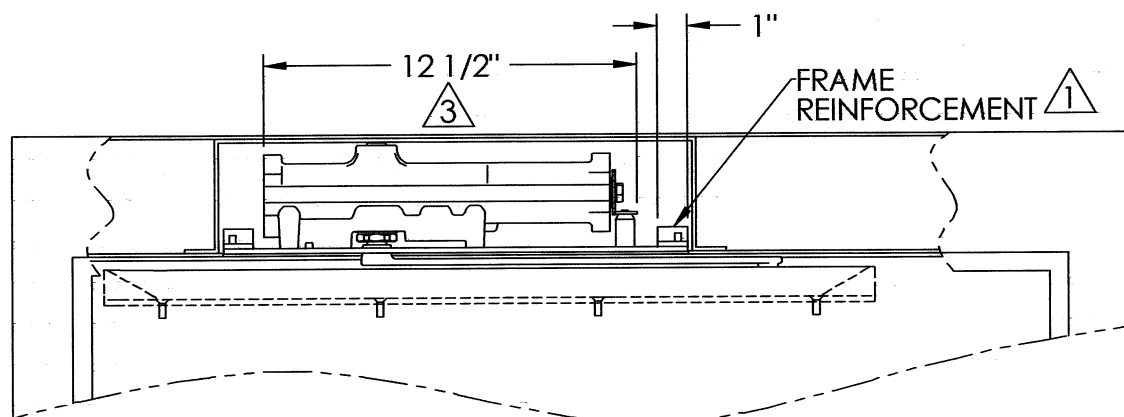


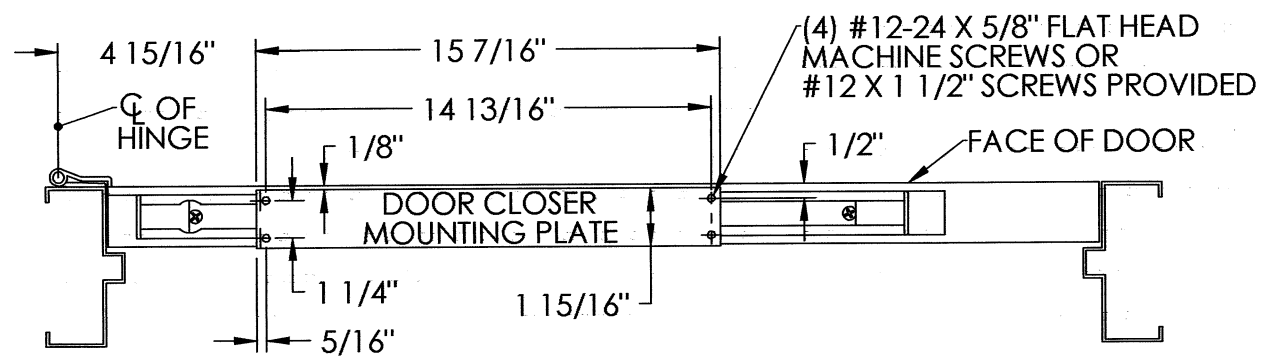

# NOTES:

- 1 USE 7 GAUGE REINFORCEMENT FOR HOLLOW METAL FRAMES.
- 2 USE 12 GAUGE REINFORCEMENT FOR HOLLOW METAL DOORS.
- 3 MINIMUM OPENING REQUIRED FOR CLOSER BODY.
- 4 A REMOVABLE STOP IS REQUIRED FOR DOOR WIDTHS UNDER 2" THICK, SEE TEMPLATE A7777 FOR REMOVABLE STOP FRAME DETAIL.
- 5 MAXIMUM DEGREE OF OPENING 120°.
- 6 LEFT HAND DOOR AND CLOSER SHOWN, RIGHT HAND OPPOSITE.
- 7 15" X 2" CUT OUT REQUIRED FOR CLSOER MOUNTING PLATE & COVER PLATE

**SARGENT®** Manufacturing Company  
100 Sargent Drive New Haven, CT 06511

DATA SHEET:  
268 CSP & CSPS/CSPD OVERHEAD  
CONCEALED SECURITY CLOSER  
WITH SWING CLEAR HINGES

RELEASE DATE  
**3 Mar 08**  
TEMPLATE NO.  
A7781 B