

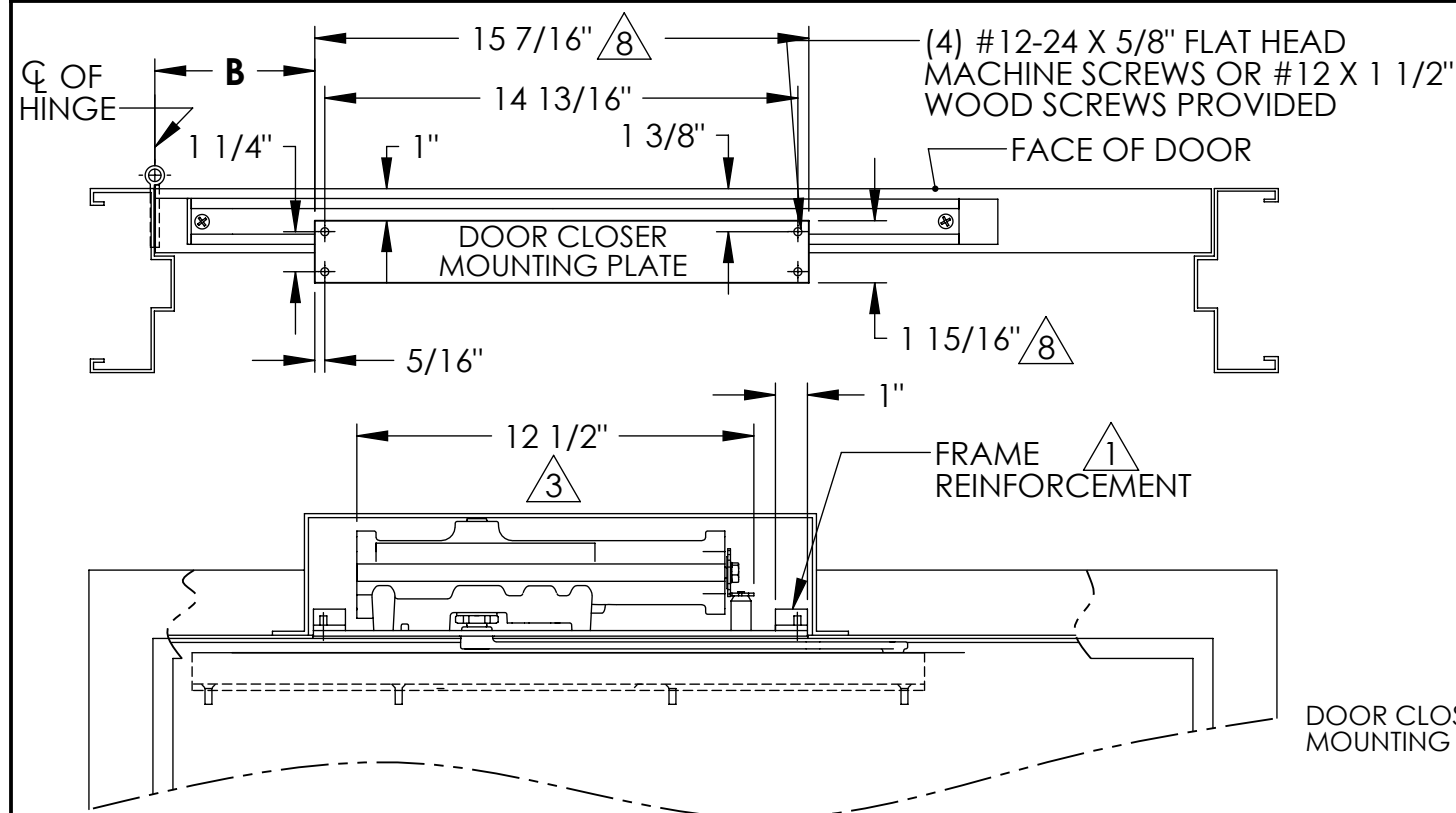



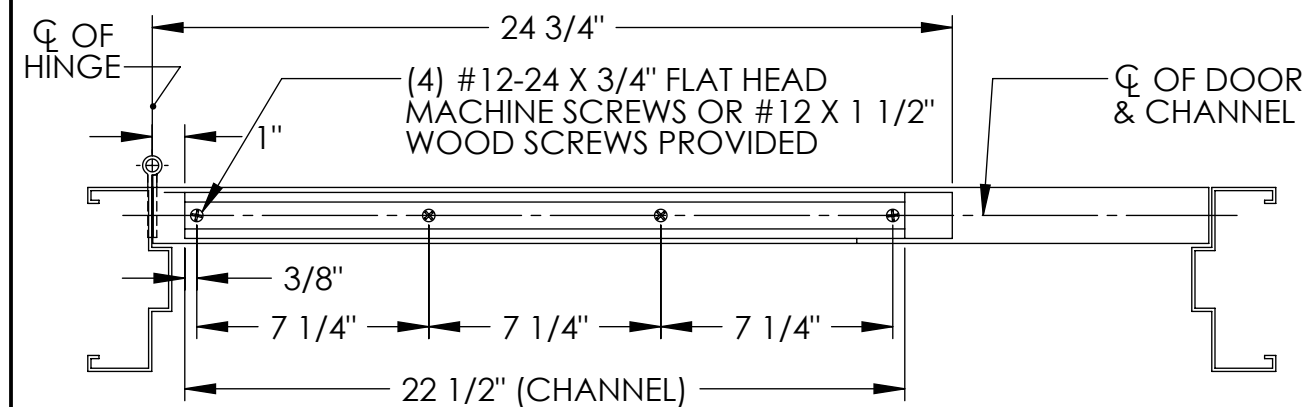


MAX DOOR OPENING	DIMENSION "B"
120°	5"
180°	4"

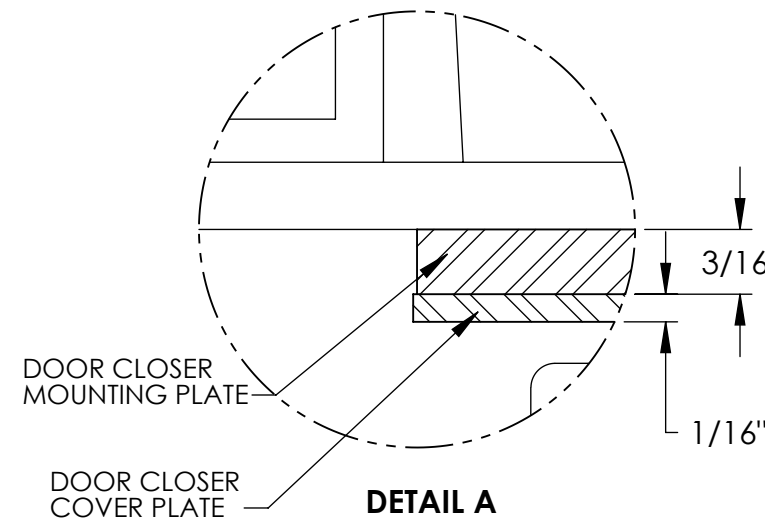

NOTES:

- 1 USE 7 GAUGE REINFORCEMENT FOR HOLLOW METAL FRAMES.
- 2 USE 12 GAUGE REINFORCEMENT FOR HOLLOW METAL DOORS.
- 3 MINIMUM OPENING REQUIRED FOR CLOSER BODY.
- 4 A SECTION OF THE STOP BELOW CLOSER MUST BE REMOVABLE, SEE TEMPLATE A7892 FOR AN ALTERNATE FRAME CONFIGURATION FOR A 2" DOOR THAT DOES NOT REQUIRE A REMOVABLE STOP.
- 5 MAXIMUM DEGREE OF OPENING 180°.
- 6 LEFT HAND DOOR AND CLOSER SHOWN, RIGHT HAND OPPOSITE.
- 7 A SECTION OF THE REMOVEABLE STOP MUST BE LEFT OPEN FOR ARM CLEARANCE.
- 8 PROVIDE A 2" x 15 1/2" CUT OUT IN FRAME FOR CLOSER COVER PLATE

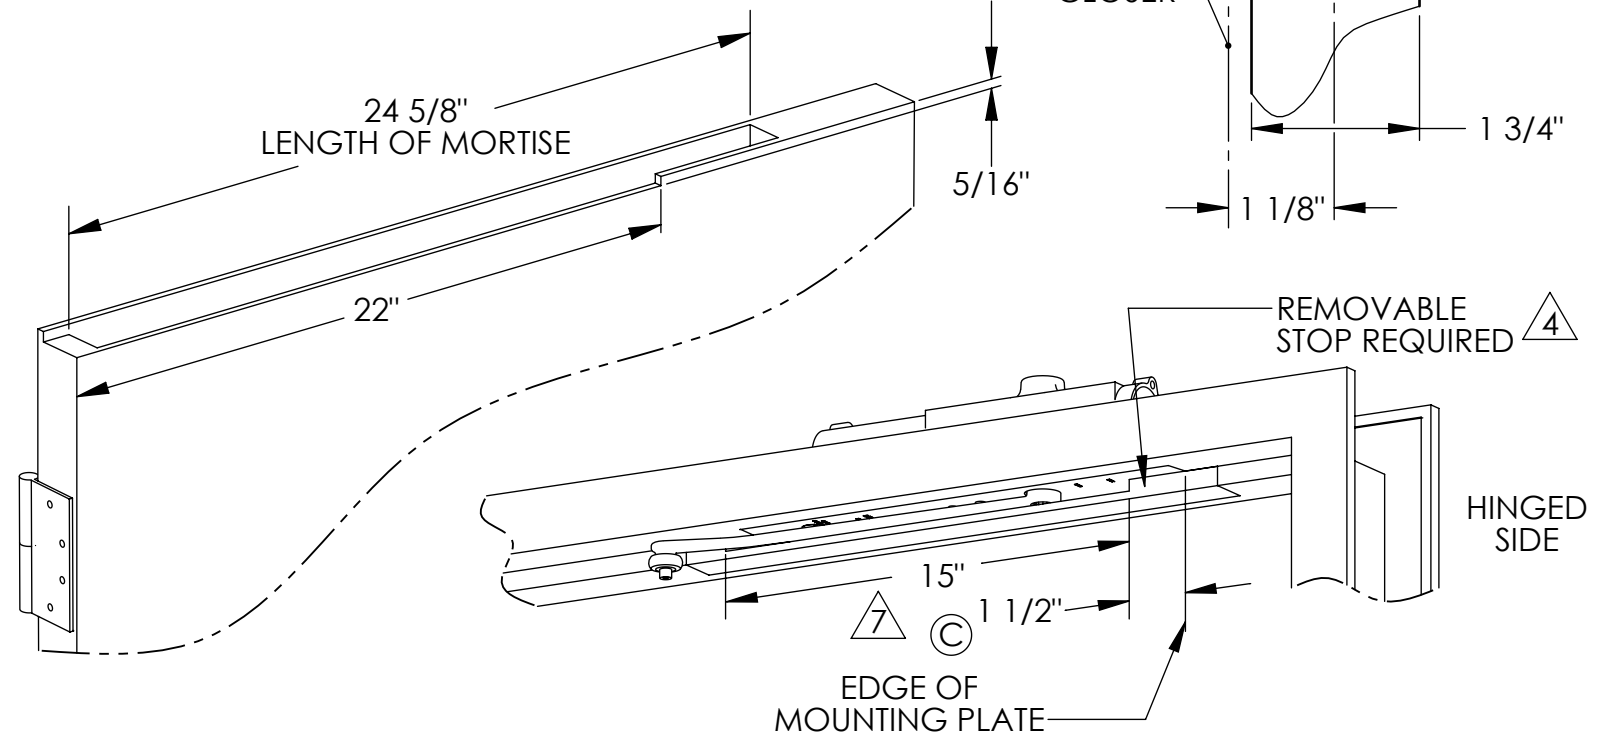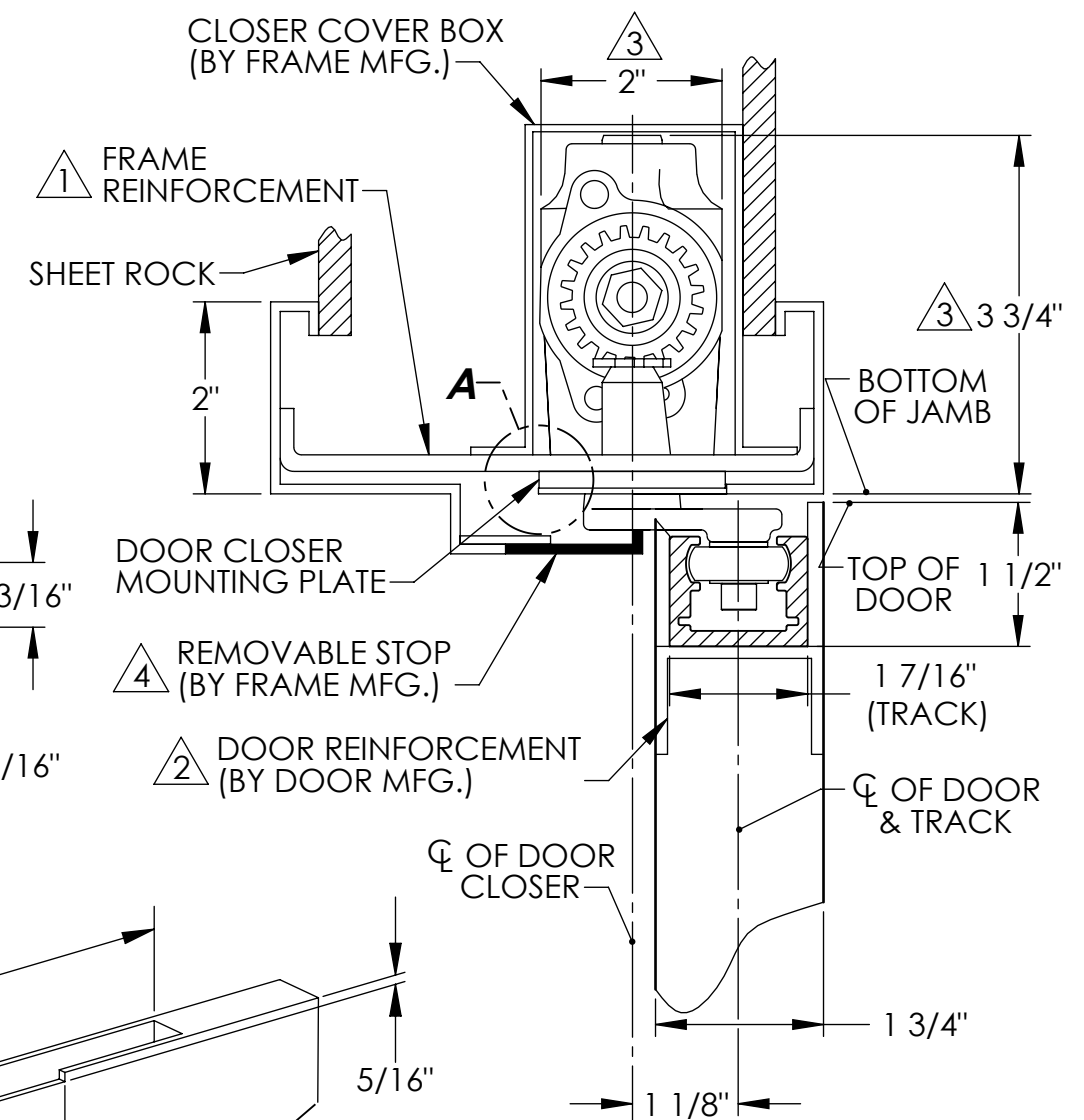

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DATA SHEET:
269 OVERHEAD CONCEALED CLOSER
WITH BUTT HINGES 2" FACE FRAME

RELEASE DATE

1 FEB 13

TEMPLATE NO.

A7981