



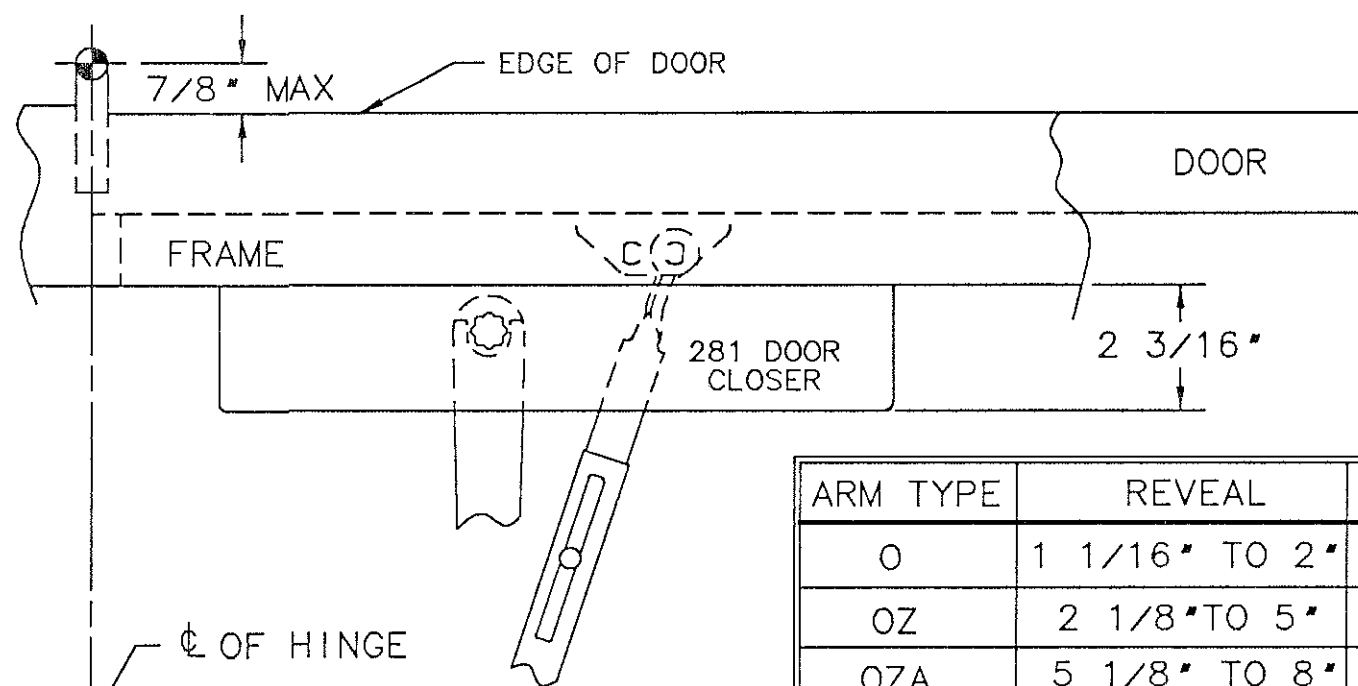


ARM TYPE	REVEAL	DIM. A
O	1 1/16" TO 2"	12 1/4"
OZ	2 1/8" TO 5"	12 1/2"
OZA	5 1/8" TO 8"	12 3/4"

SINGLE RABBETED
FRAME SHOWN

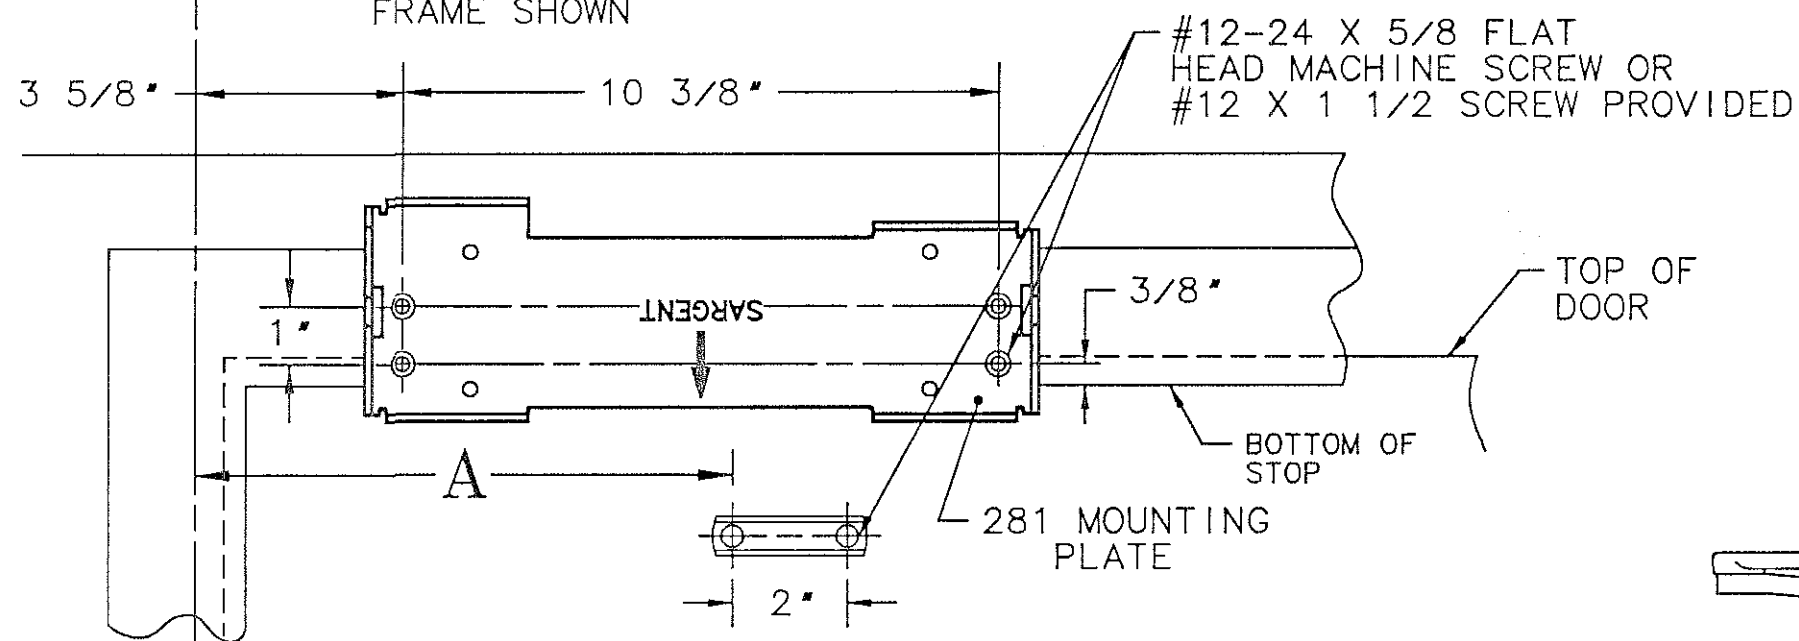


NOTES

1. REINFORCE METAL DOORS AND FRAMES PER ANSI A250.8 & SDI-100, 12 GAUGE RECOMMENDED.
2. LEFT HAND DOOR SHOWN, RIGHT HAND OPPOSITE.
3. FOR LOW CEILING CONDITIONS, USE 281-B MOUNTING PLATE, SEE TEMPLATE A7520.
4. THE TURN LEVER IS USED ON THE 590 & 690 HOLDERS ONLY, THE 690 TURN LEVER MAY BE INSTALLED ON EITHER SIDE OF DOOR.
5. FOR 1536-1539 INSTALLATION, SEE TEMPLATES A7485 - A7487.
6. FOR 1546-1549 INSTALLATION, SEE TEMPLATES A7488 - A7490.
7. FOR 697-699 INSTALLATION, SEE TEMPLATES A7482 - A7484.
8. FOR 597-599 INTALLATION, SEE TEMPLATES A7479 - A7481.

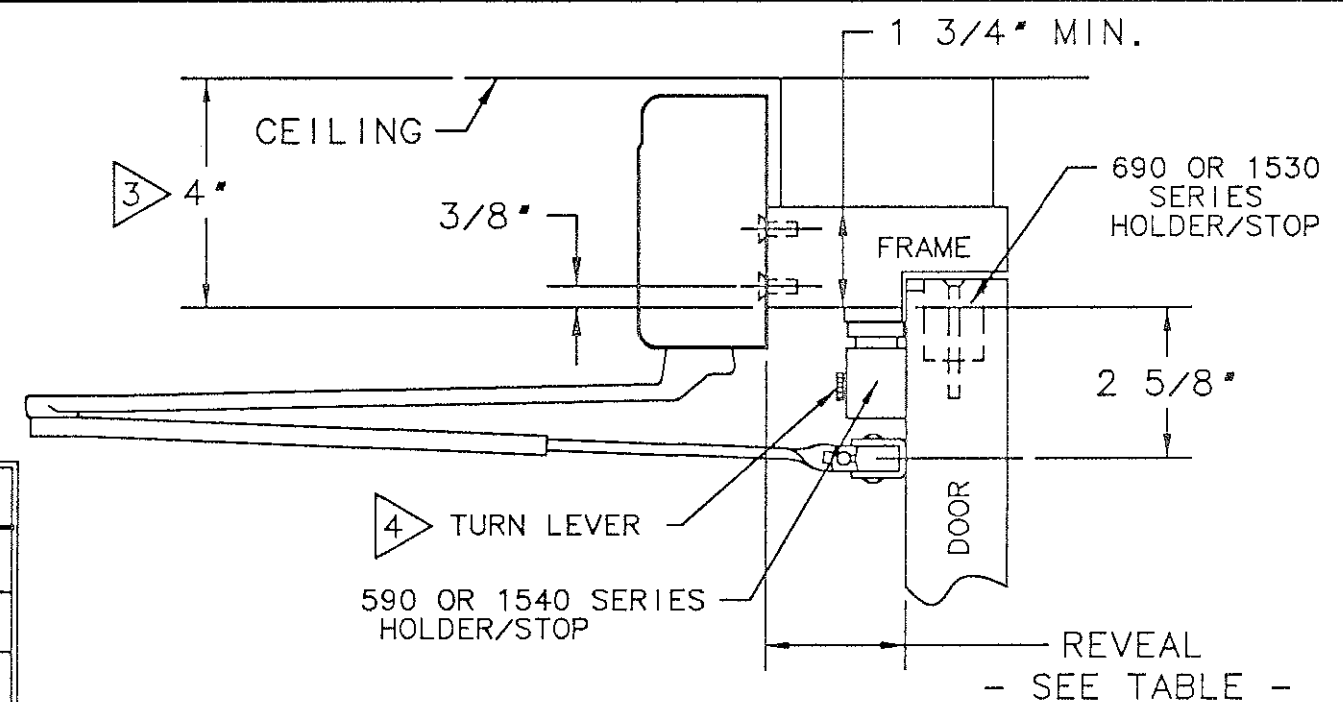

SINGLE RABBETED FRAME
(590 & 690 SHOWN)

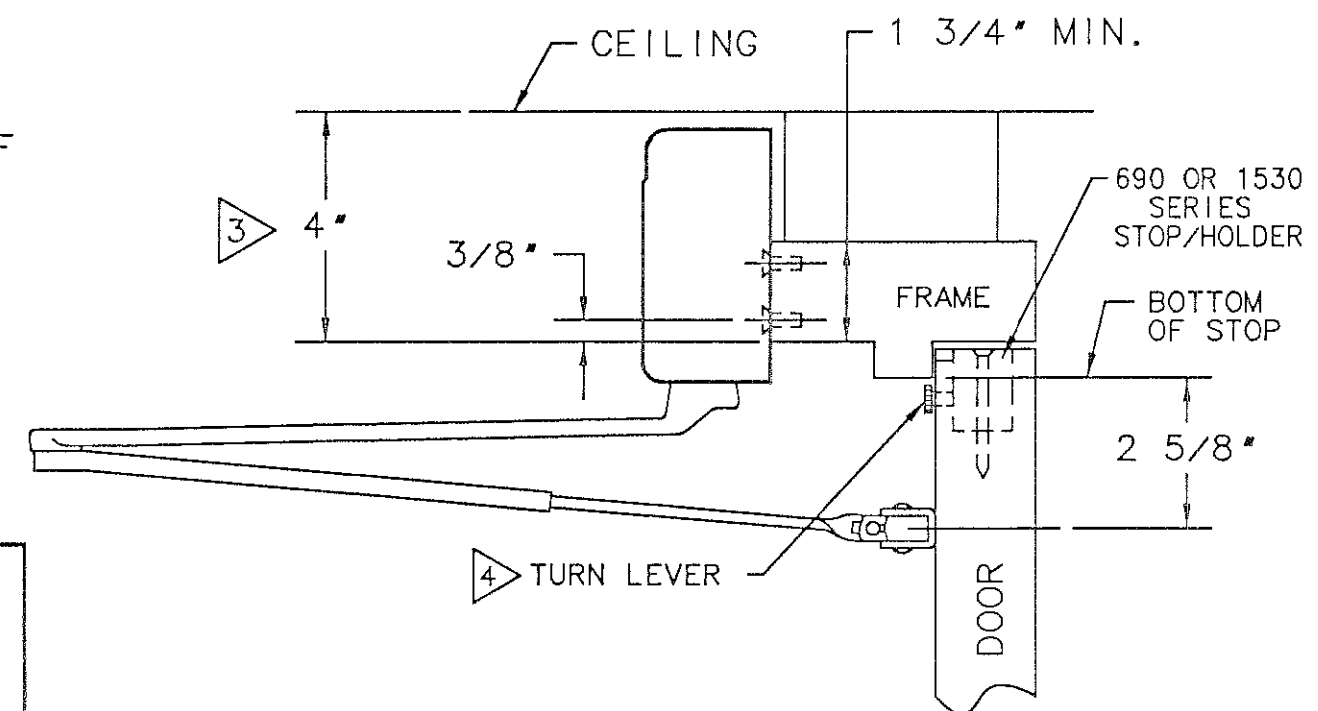

DOUBLE RABBETED FRAME
(690 SHOWN)

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DATA SHEET:	281 SERIES CLOSER (TOP JAMB APPLICATION) WITH O, OZ OR OZA ARM WITH A 1536-1539, 1546-1549, 597-599 OR 697-699 HOLDER OR STOP	RELEASE DATE 12 JULY 02 TEMPLATE NO. A7519 A
-------------	--	---