

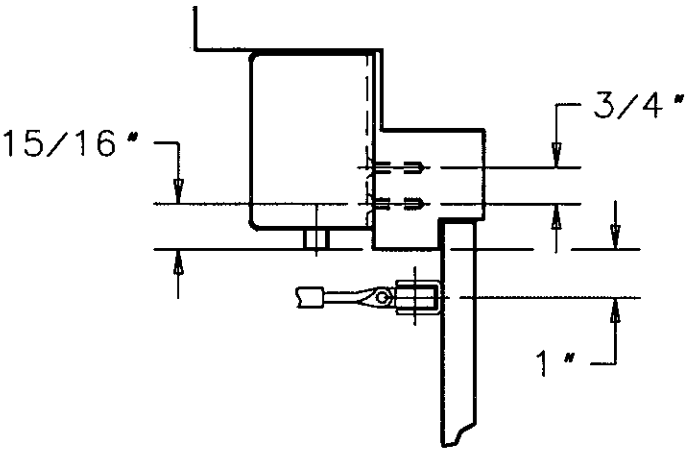


DESCRIPTION	MODEL No.	DEPTH OF REVEAL $\triangleleft$	ARM ASSEMBLY FURNISHED	MAXIMUM DOOR OPENING	RANGE OF HOLD OPEN	DIM "A"
MULTI-POINT HOLD-OPEN CLOSER-HOLDER FIREGUARD	2991, 9-2991 & 12-2991	0" TO 1 3/4"	TYPE "O" ARM	180°	10° TO 170°	11 1/8"
	2992, 9-2992 & 12-2992	1 7/8" TO 4"	TYPE "OZ" ARM	↓	↓ ↓ ↓	↓ ↓ ↓
	2993, 9-2993 & 12-2993	4 1/8" TO 7"	TYPE "OZA" ARM	160°	10° TO 150°	11 15/16"
	2994, 9-2994 & 12-2994	4 1/8" TO 7"	TYPE "OY" ARM	180°	10° TO 170°	↓ ↓ ↓
	2995, 9-2995 & 12-2995	7 1/8" TO 8 5/8"	TYPE "OYA" ARM	↓	↓ ↓ ↓	↓ ↓ ↓

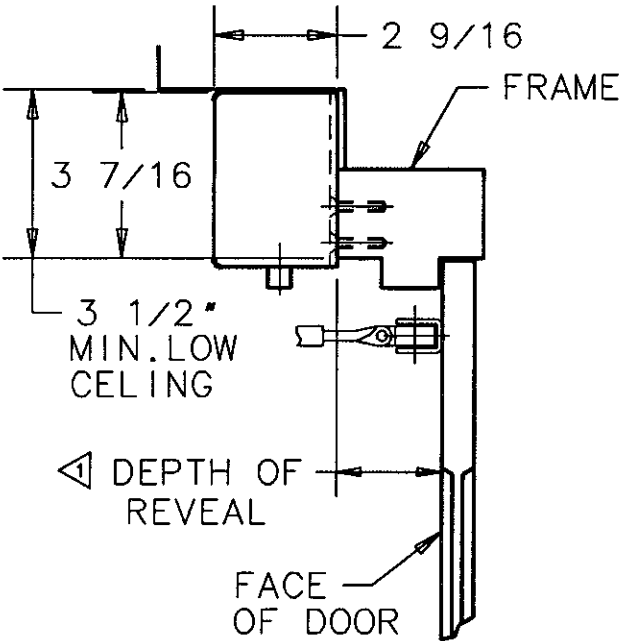

SINGLE RABBETTED FRAME

FURNISHED WITH #12-24 x 5/8" FLAT HEAD MACHINE SCREWS AND #12 x 1 1/2" FLAT HEAD WOOD SCREWS. TWO (2) REQUIRED FOR CLOSER FOOT. SIX (6) REQUIRED FOR BACKPLATE.

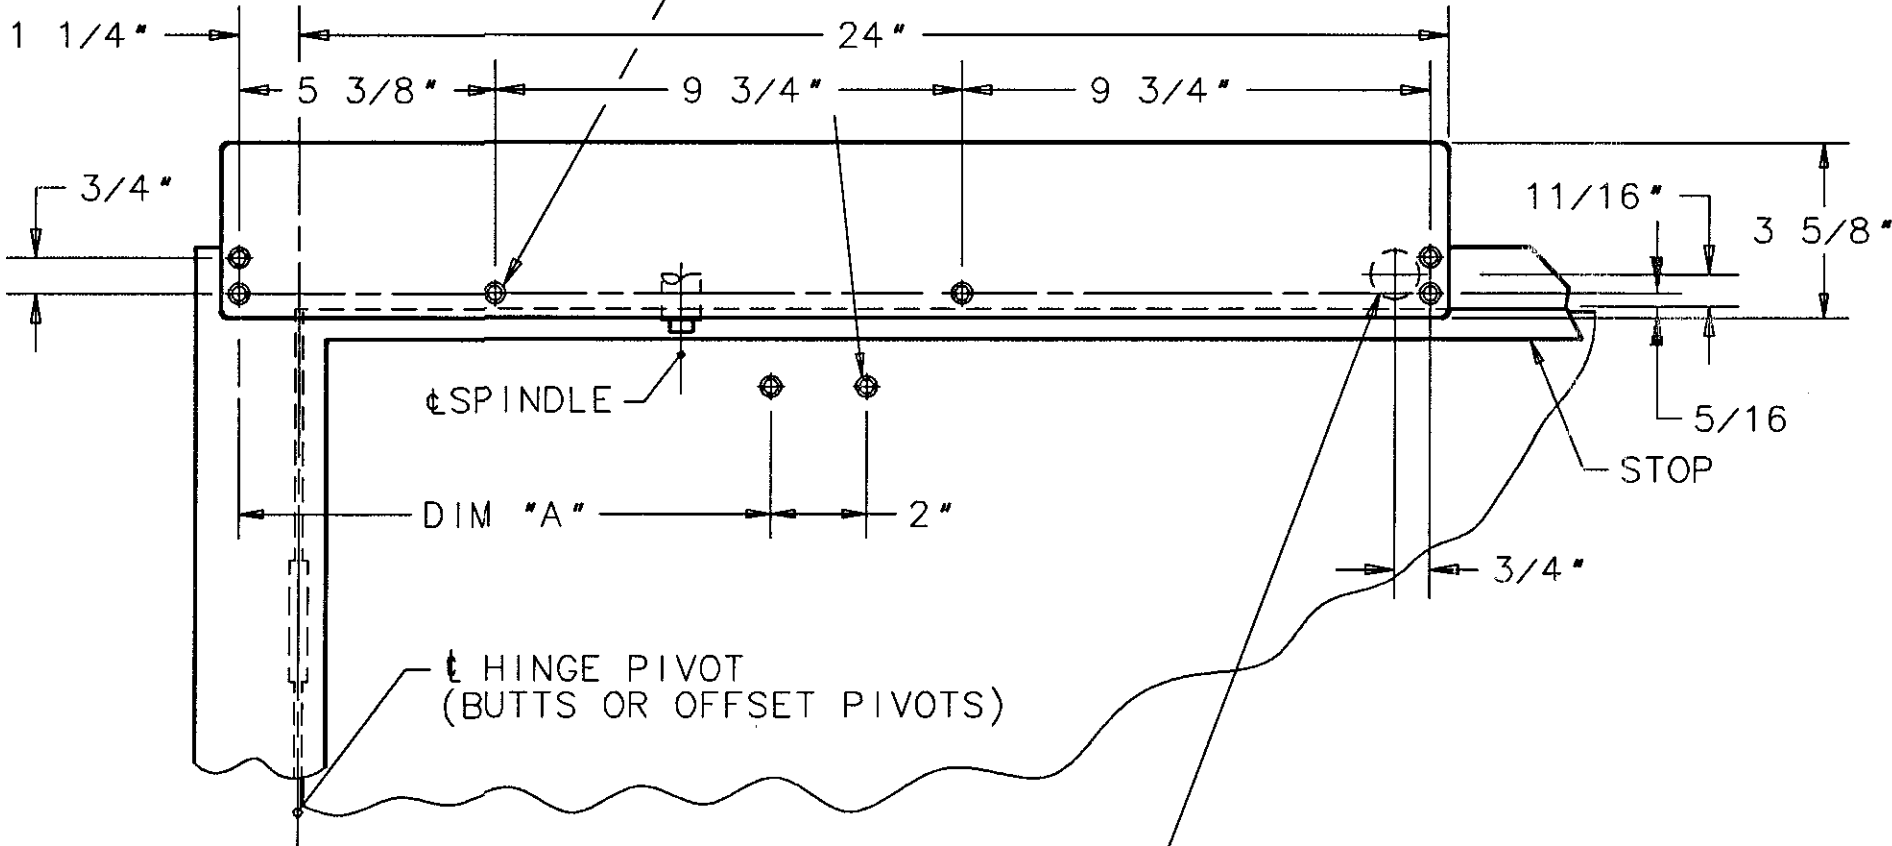

DOUBLE RABBETTED FRAME

- ② LEFT HAND DOOR SHOWN. RIGHT HAND OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENTS REQUIRED FOR METAL DOORS AND FRAMES.

FOR CONCEALED WIRING ONLY: 1 1/8" DIA. HOLE IS REQUIRED FOR 3/4" CONDUIT FITTING. IT IS IMPORTANT THAT SPACE BE PROVIDED WITHIN THE FRAME FOR THE CONDUIT.

SARGENT MFG. COMPANY		NEW HAVEN, CONN. 06511	
DATA SHEET: 2900 SERIES FIREGUARD PUSH MOUNTING MODELS: 2990, 9-2990 & 12-2990 REGULAR ARM		RELEASE DATE AUGUST 00	TEMPLET NO. A7359 B