

For 5/8" latch or 3/4" latch with 1/8" gap

- Choice of failsafe or failsecure
- 4.875" (124mm) radius corner
- All stainless steel parts
- 630 Satin stainless steel face plate

SPECIFICATIONS

 Input
 200mA @ 12VDC, 150mA @ 24VDC

 Dimensions
 1-1/4" W x 4-7/8" H x 1-1/2" D

MODEL

15-4F12U	Failsafe, 12VDC	94.00	15-4S12U	Failsecure, 12VDC	94.00
15-4F24L	Failsafe, 24VDC	94.00	15-4S24U	Failsecure, 24VDC	94.00
RMB	Buzzer 12/24V AC/DC operation	45.00	BR64XL	Rectifier for AC operation	28.00

Not recommended for wood application

25 Series Electric Strike

LIST



The SDC 25 Series electric strike is designed for use with locksets having 5/8" (15mm) throw latchbolt. The compact low profile design with an internally mounted solenoid and factory supplied mounting tabs enable quick and easy installation where jamb space is limited.

- For 1/2" latch or 5/8" latch with 1/8" door gap
- Latch bolt monitor standard
- Failsecure
- Field reversible for failsafe operation
- Compatible with 5/8" latchbolts
- All stainless steel parts
- 630 Stainless steel standard finish

SPECIFICATIONS

Dual Voltage 200/100 mA @ 12/24VDC

Latch Status SPDT, 3 Amp @ 30VDC

Dimensions 1-1/4" W x 4-7/8" H x 1-1/2" D

MODEL

25-4U	4.875" (124mm) Square corner				134.00
RMB	Buzzer 12/24V AC/DC operation	43.00	BR64XL	Rectifier for AC operation	28.00

Not recommended for wood application

30 Series Rim Mount Electric Strikes


iscount Code

FΚ

Stainless steel electric strike for rim mount exit devices. Strike is non-handed, fail secure is standard with fail safe optional. Standard finish is stainless steel 630 (U). Check template to ensure compatibility.





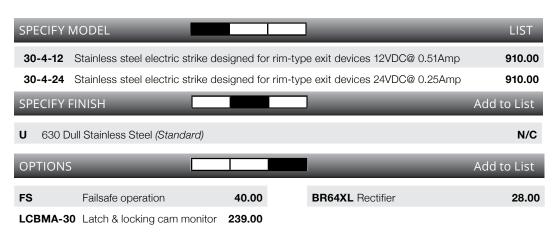

Not Compatible with SDC S6000 See S6000 Electric Trim page 26