



30-4 SERIES

ELECTRIC STRIKE

Features

The IDC 30-4 Series electric strike is designed for use with rim mount exit devices having pullman type latchbolts or the top pullman latch of a surface vertical-rod exit device.

- All stainless steel for corrosion resistance and strength
- Tamper resistant, heavy-duty construction
- Set screws for adjustment lockdown
- Milled ramps to better accommodate deadlatches
- Integrated shim for quick customization of faceplate thickness (3/4" to 1/2")
- In-frame horizontal adjustability
- Pullman keeper
- Non-handed, reversible
- Failsecure (standard) Failsafe (optional)
- 3/4" keeper depth
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.

Model

30-4 Electric Strike with 0.75" (19mm) faceplate. Except .5" (12.7mm) without 1/4" spacer.

Specifications

- 12** 0.51 Amp @ 12VDC, 24 OHMS
- 24** 0.25 Amp @ 24VDC, 96 OHMS

Finish



- 630 Stainless Steel (standard)
- 606 Dull Brass
- 612 Dull Bronze
- 613 Oil Rubbed Bronze
- 625 Bright Chrome
- 626 Dull Chrome
- 629 Bright Stainless Steel

Options

- FS** Failsafe operation
- LBM-30** Latchbolt Monitor
- LCM-30** Locking Cam Monitor
- BR64XL** Rectifier for AC operation

Listings

- UL 10C, 3 hour fire-rated (fail secure only)
- UL1034, burglary-resistant rated
- ANSI/BHMA A156.31, Grade 1
- CAN4-S104 (ULC-S104) fire door conformant
- DOD approved
- New York City accepted

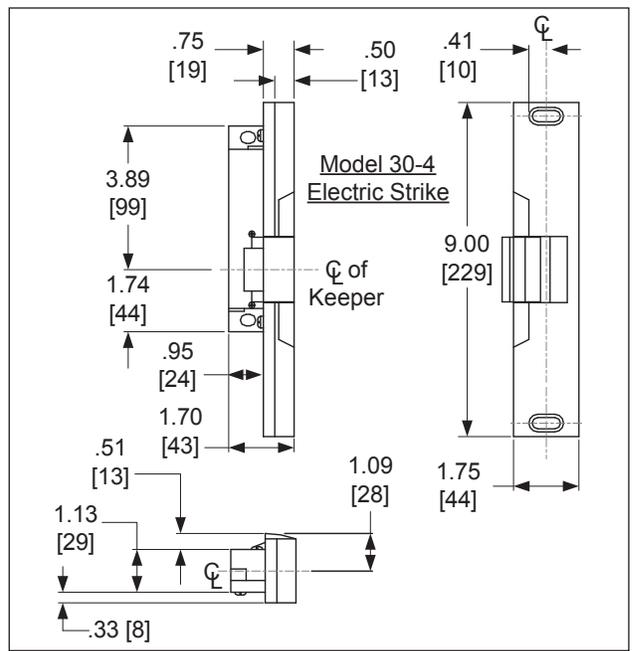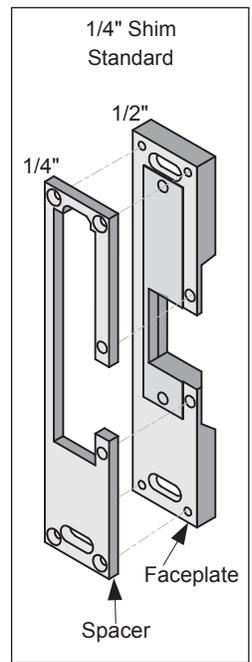



UNI-FLEX™ SERIES MULTI-APPLICATION ELECTRIC STRIKE

UniFLEX™ 45 SERIES

UNIVERSAL ELECTRIC STRIKE

Uni-Flex™ Series Multi-Application Electric Strike

- **Centerline Electric Strike**
- **4 Interchangeable Application Faceplates**
- **Full Monitoring is Standard, Including:
Latched and Unlatched Status
Keeper Closed and Deadlocked or Unlocked
Keeper Open Status Optional**
- **Reversible Failsafe/Failsecure, no disassembly**
- **1/4" Horizontal Alignment Adjustment**
- **Plated Architectural Finishes Available**

The IDC Uni-Flex electric strike is designed for use with locksets with up to 3/4" latchbolts*. The quality construction makes the 45 series ideal for high traffic applications. The compact low profile design enables quick and easy installation where jamb space is limited.



Features



- For 5/8" latch or 3/4" latch with 1/8" door gap
- Latch position status standard
- Keeper closed & deadlocked/unlocked status standard
- Field selectable failsecure - failsafe
- Field selectable voltage, 12/24V AC/DC
- 1/4" Horizontal alignment adjustment
- Low profile, 1-3/16" deep
- Plug-in wire connectors
- Mounting tabs
- Non-handed
- All stainless steel parts with durable die cast body for corrosion resistance
- Fewer moving parts for maximum life
- Stainless steel standard with square corner faceplate
- Aluminum standard with radius corner faceplate
- ANSI/ BHMA A156.31, Grade 2



US Patent: 7,540,542

Uni-Flex™ Pac

Multi-Application strike with three faceplates for wood, aluminum and hollow metal frames

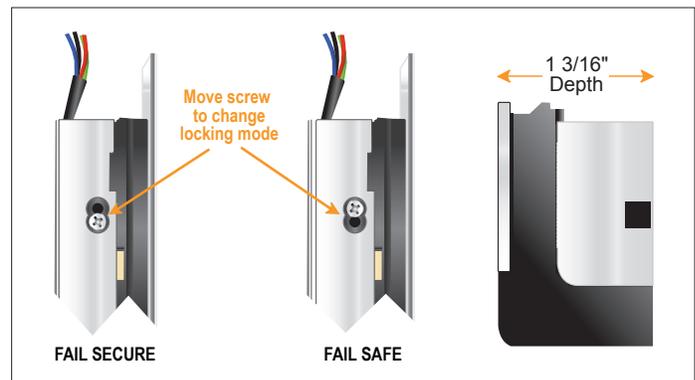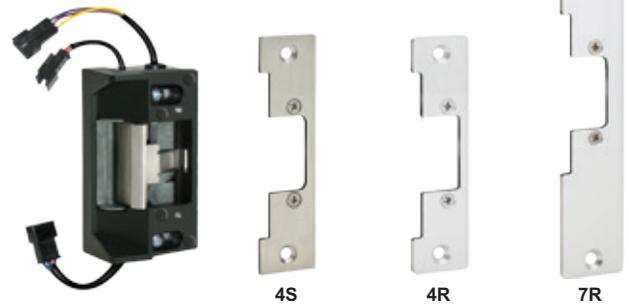

International Door Closers, Inc.

COPYRIGHT 2018 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com