



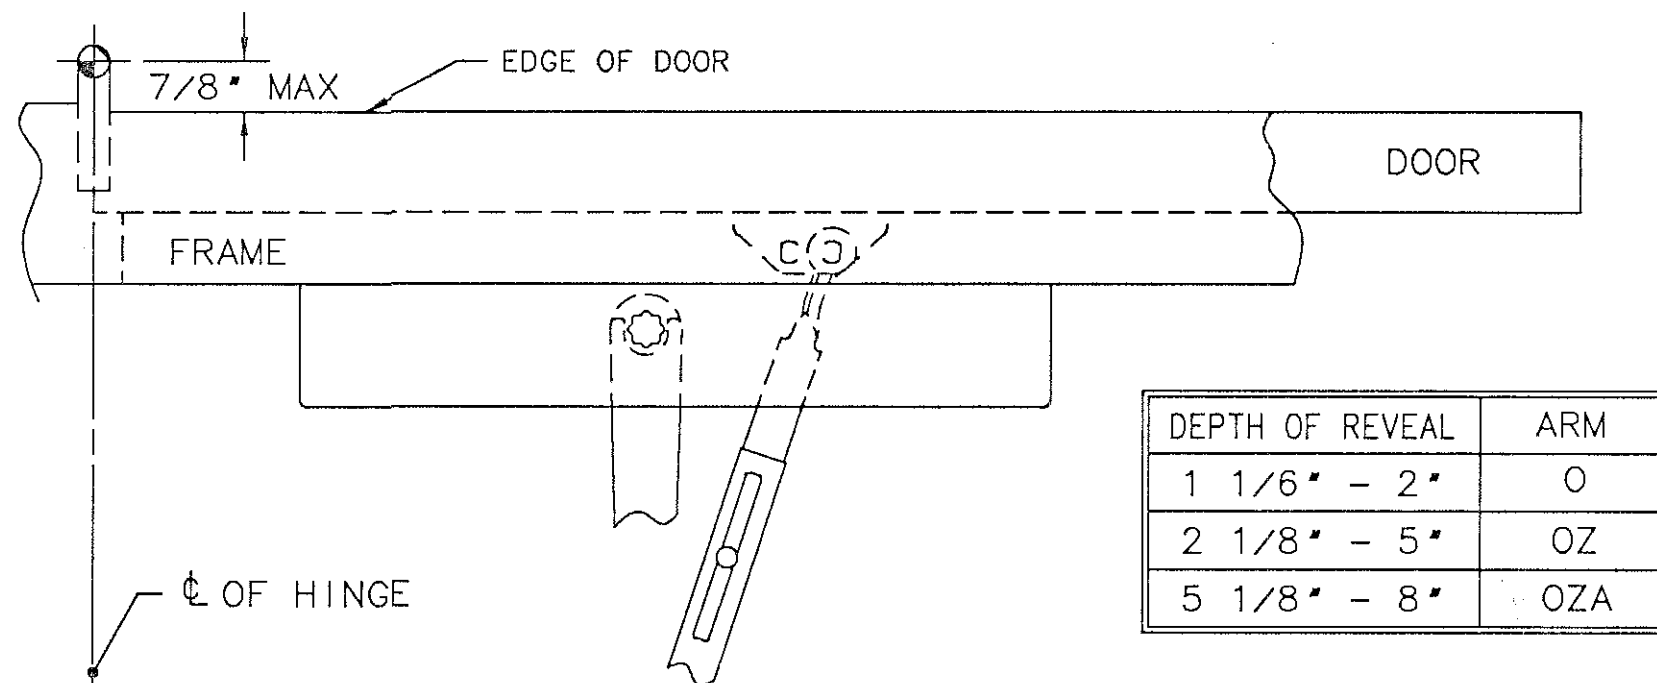


DEPTH OF REVEAL	ARM
1 1/6" - 2"	O
2 1/8" - 5"	OZ
5 1/8" - 8"	OZA

SINGLE RABBETED
FRAME SHOWN

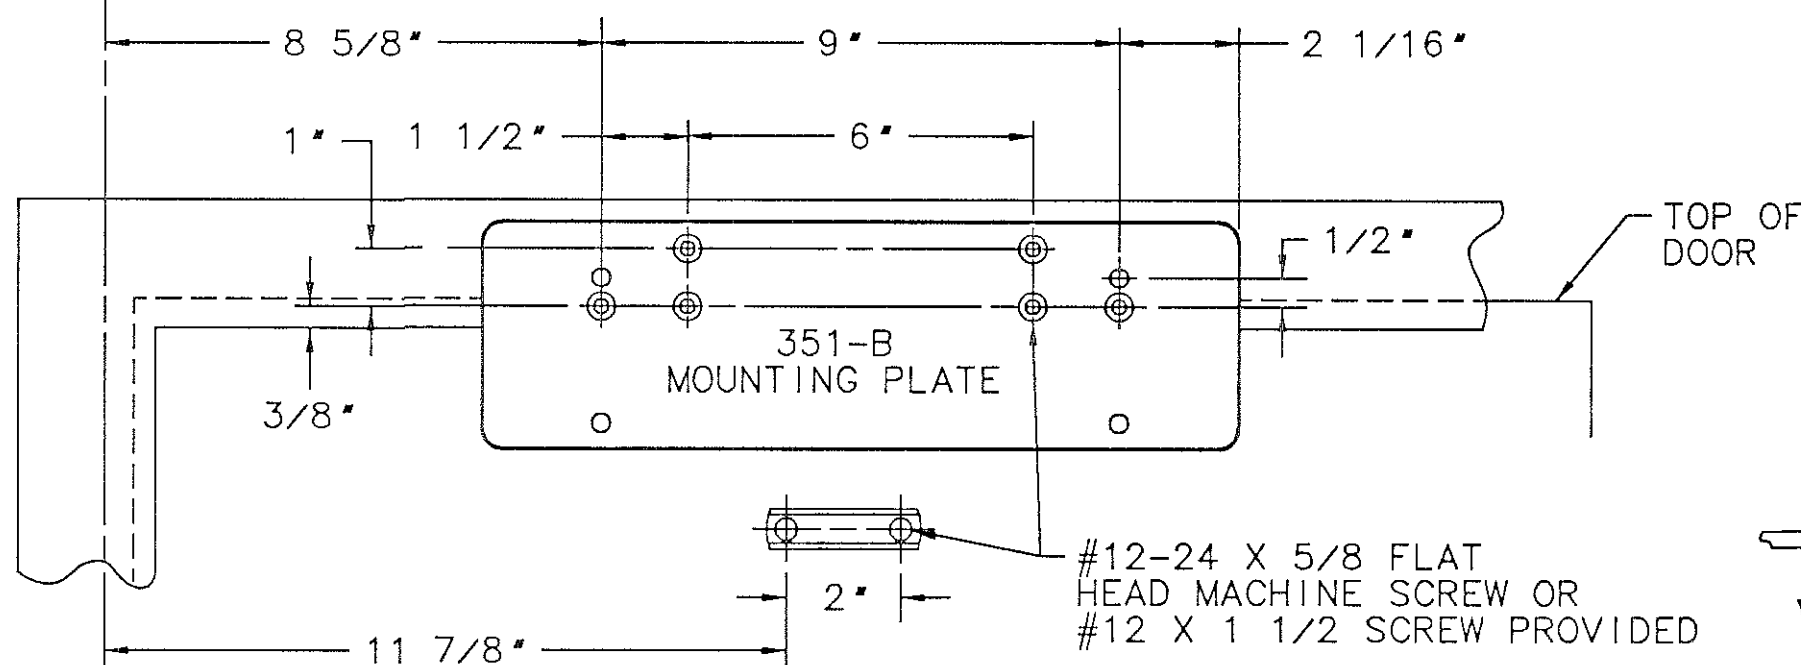


NOTES

1. REINFORCE METAL DOORS AND FRAMES PER ANSI A250.8 & SDI-100, 12 GAUGE RECOMMENDED.
2. LEFT HAND DOOR SHOWN, RIGHT HAND OPPOSITE.
3. TURN LEVER USED ON 590 AND 690 HOLDERS ONLY, THE 690 TURN LEVER MAY BE INSTALLED ON EITHER SIDE OF DOOR.
4. FOR 1536 - 1539 INSTALLATION, SEE TEMPLATES A7485 - A7487.
5. FOR 1546 - 1549 INSTALLATION, SEE TEMPLATES A7488 - A7490.
6. FOR 697 - 699 INSTALLATION, SEE TEMPLATES A7482 - A7484.
7. FOR 597 - 599 INSTALLATION, SEE TEMPLATES A7479 - A7481

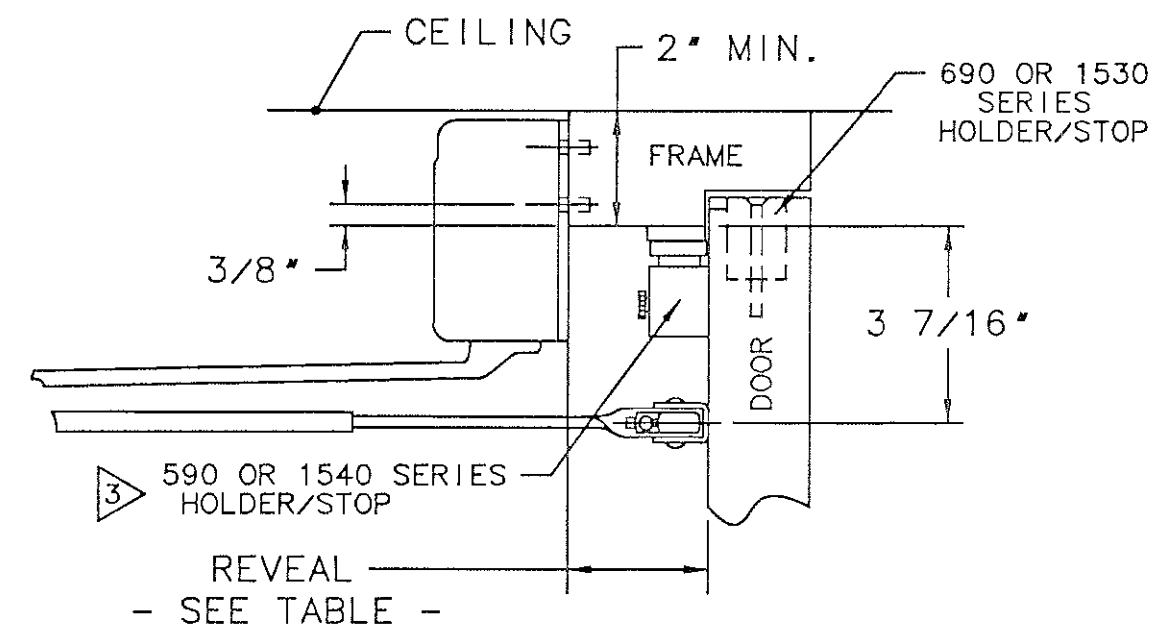

SINGLE RABBETED FRAME
(590 & 690 SHOWN)

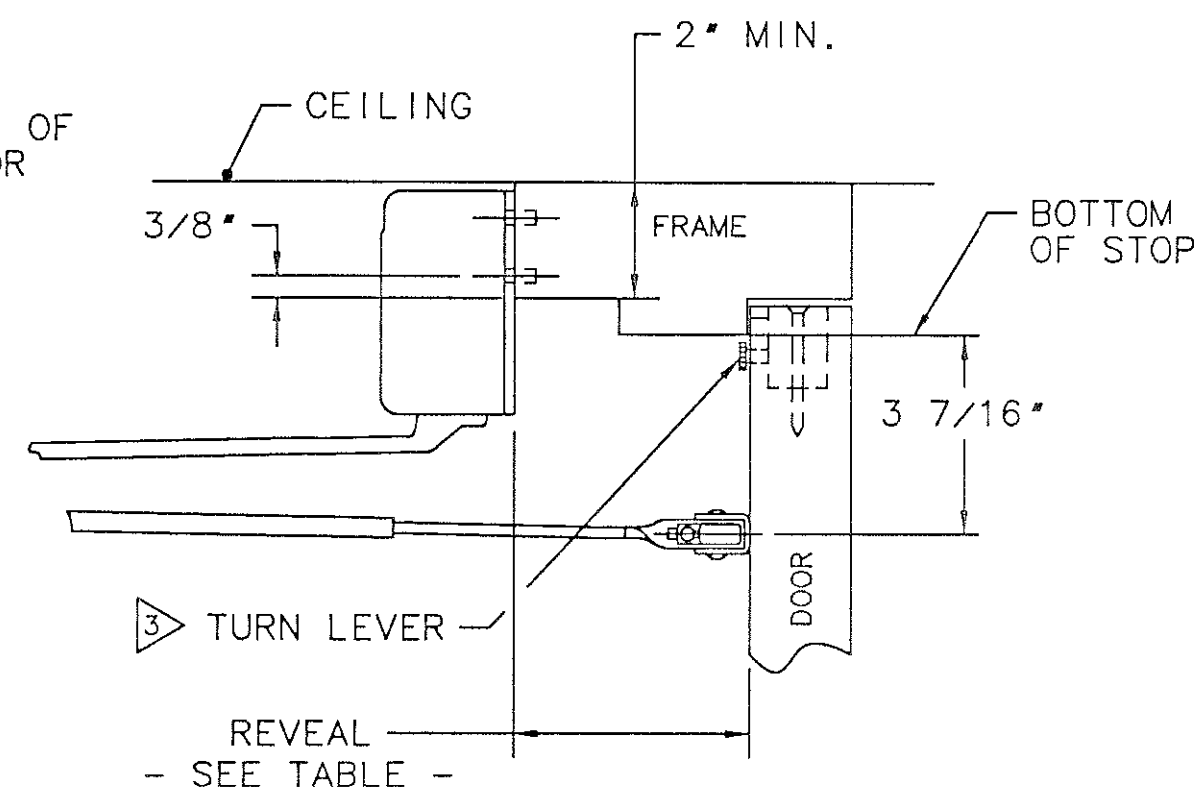

DOUBLE RABBETED FRAME
(690 SHOWN)

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DATA SHEET: 351 SERIES CLOSER (LOW CEILING
/TOP JAMB APPLICATION) WITH AN O, OZ & OZA
ARM AND A 1536-1539, 1546-1549 OR A 597-
599, 697-699 HOLDER OR STOP

RELEASE DATE
12 JULY 02
TEMPLATE NO.
A7539 A