



DESCRIPTION	ARM TYPE	MAXIMUM DOOR OPENING		RANGE OF HOLD OPEN
		WITH BUMPER	WITHOUT BUMPER	
REGULAR ARM	OD	120°●	160°●	
HOLDER ARM	HD	120°●	160°●	85° TO 120°

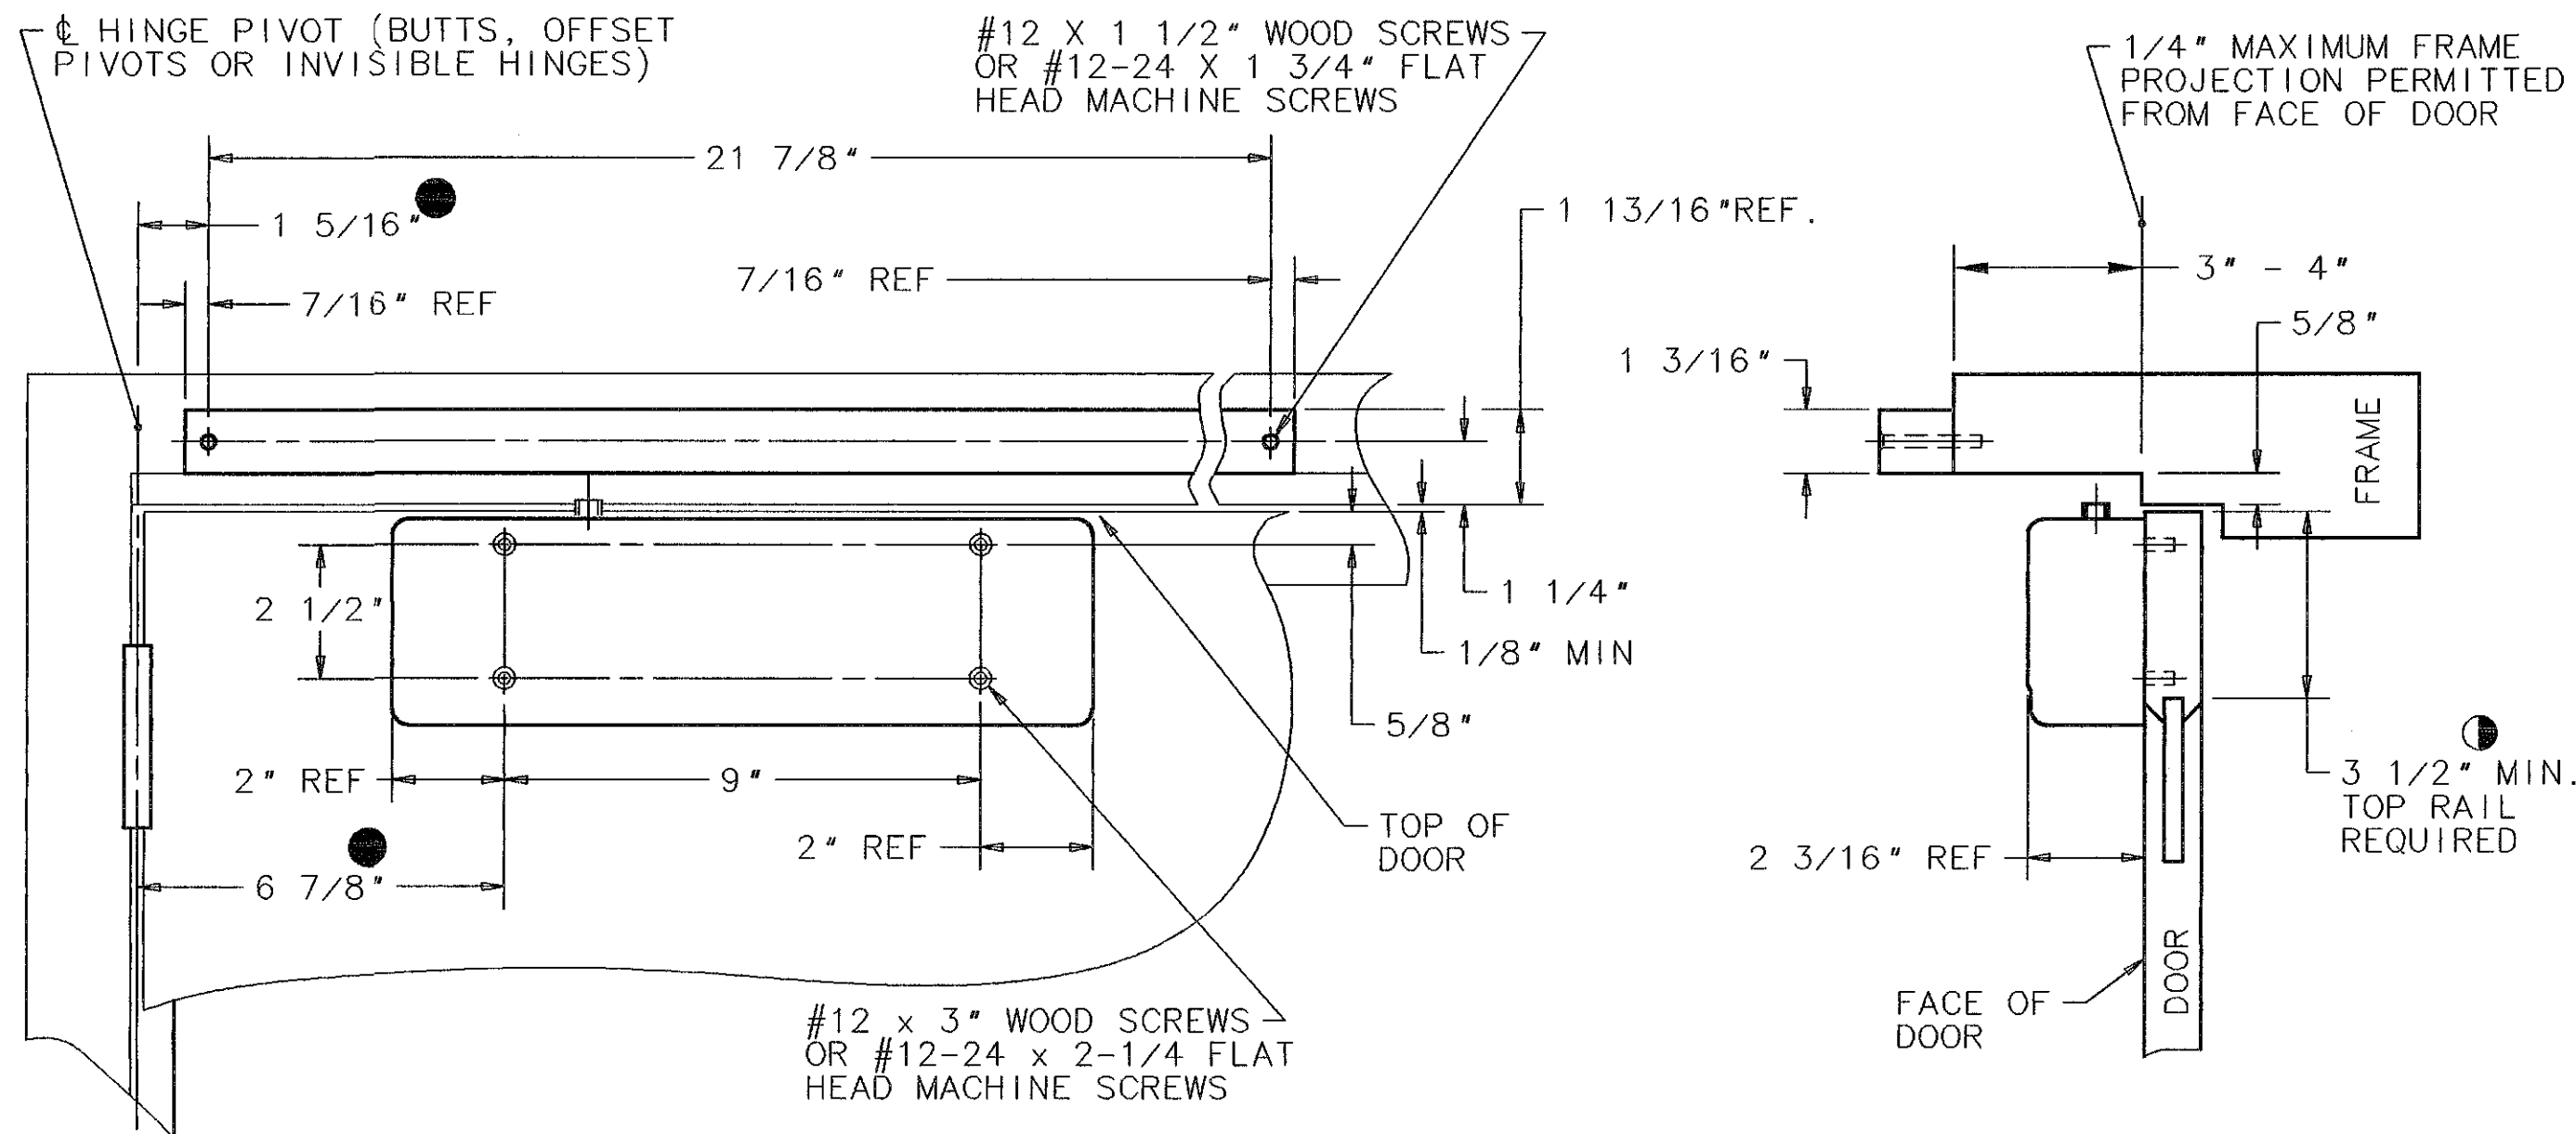

NOTES:

1. RIGHT HAND DOOR SHOWN, LEFT HAND DOOR OPPOSITE.
2. 12 GAGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS AND FRAMES.
3. ● - THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGERS.
4. ○ - TO OPEN DOOR 120° REMOVE BUMPER STOP.
5. ◐ - IF DOOR AND FRAME CONDITION PERMIT.
6. ◑ - SPACE REQUIRED TO MOUNT CLOSER ON RAIL. IF SPACE IS LESS THAN SHOWN USE DATA SHEET A6772 FOR DETAILS.

SARGENT MFG. COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 351 SERIES CLOSER
TRACK TYPE APPLICATION
DOUBLE EGRESS
OD AND HD ARMS

EFFECTIVE DATE
JAN 00
TEMPLER NO.
A7355 B