


Euroline Lever Function List



Picture	Function	Function Description	Required Parts
4	Passage	Latch bolt operated by lever from either side at all times.	3800U-55L Leverset
	Bathroom Indicator	Latch bolt operated by lever from either side at all times. Dead bolt operated by thumbturn from inside and by emergency release with indicator from outside.	3800U-55B Leverset 2-669-0736
1	Privacy	Latch bolt operated by lever from either side at all times. Dead bolt operated by thumbturn from inside and by emergency release from outside.	3800U-55S Leverset 3000R
4	Classroom	Latch bolt operated by lever from either side. Dead bolt operated by key from outside. Operating inside lever retracts both latchbolt and deadbolt simultaneously.	3800U-55P Leverset Split Spindle* 3000H

Rev -, Rev Date: 03/25/15 Page **1** of **3**

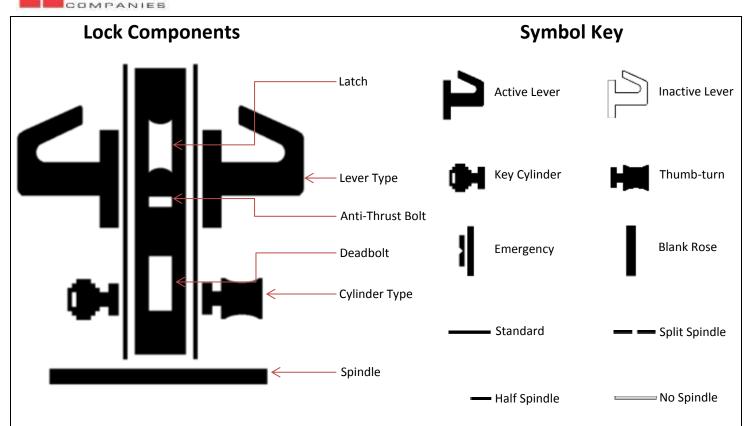

Euroline Lever Function List

Picture	Function	Function Description	Required Parts
	Storeroom	Latch bolt operated by key from outside or by operating inside lever. Outside lever never retracts latch.	3800U-55M Leverset Half Spindle** 3000H
	Security Storeroom	Latch bolt operated by key from outside or by operating inside lever. Outside lever never retracts latch. Auxiliary dead latch.	3800U-55T Leverset Half Spindle** 3000H
4 • • • • • • • • • • • • • • • • • • •	Exit	Latch bolt operated by lever from either side. Dead bolt operated by key from outside and by thumbturn from inside. Operating inside lever retracts both latchbolt and deadbolt simultaneously.	3800U-55P Leverset Split Spindle* 3000C
<u></u>	Entrance	Latch bolt operated by lever from either side. Dead bolt operated by key from either side.	3800U-55S Leverset 3000D
4	Bedroom	Latch bolt operated by lever from either side. Dead bolt operated by thumbturn from inside and emergency release from outside. Operating inside lever retracts both latchbolt and deadbolt simultaneously.	3800U-55P Leverset Split Spindle* 3000R
4 <u>1</u> 1	Dormitory	Latch bolt operated by lever from either side. Dead bolt operated by key from outside and thumbturn from inside.	3800U-55S Leverset 3000C
	Institutional	Latch bolt operated by key from either side. Neither lever retracts latch.	3800U-55M Leverset*** 3000D
	Security Institutional	Latch bolt operated by key from either side. Neither lever retracts latch. Auxiliary dead latch.	3800U-55T Leverset*** 3000D

Rev -, Rev Date: 03/25/15 Page **2** of **3**



Euroline Lever Function List

Picture	Function	Function Description	Required Parts
1:	Security Classroom	Latch bolt operated by lever from either side. Dead bolt operated by key from inside or outside. Operating inside lever retracts both latchbolt and deadbolt simultaneously.	3800U-55P Leverset Split Spindle* 3000D
94	Double Dead Bolt	Dead bolt operated by key from either side. No latch.	3800U-55F 3000D
	Privacy Dead Bolt	Dead bolt operated by key from outside and by thumbturn from inside. No latch.	3800U-55F 3000C
\$ 8	Single Deadbolt	Dead bolt operated by key from outside only. No Latch	3800U-55F 3000H

^{*} Use the split spindle in place of the spindle that comes with the leverset.

Rev -, Rev Date: 03/25/15 Page **3** of **3**

^{**} Use the half spindle going into the inside lever in place of the spindle that comes with the leverset.

^{***} Do not install the spindle that comes with the leverset.