



12 TO 24 VDC

THE PIEZO SWITCH


ACCESS CONTROL

TECHNICAL SPECS

VOLTAGE INPUT	MATERIAL
12 TO 24 VDC	Stainless Steel Faceplate
HOLD TIME	Plastic Transparent Light Ring
1 second to 40 seconds	DIMENSIONS
CURRENT	2¾" x 4½" x 1¼"
LEDs ON	3/8" cut corners
40 mA (Idle), 60mA (Active)	WEIGHT
LEDs OFF	8.0 oz (220 g)
10 mA (Idle), 40mA (Active)	COMPATIBILITY
	Most Single Gang Boxes



COMPONENTS

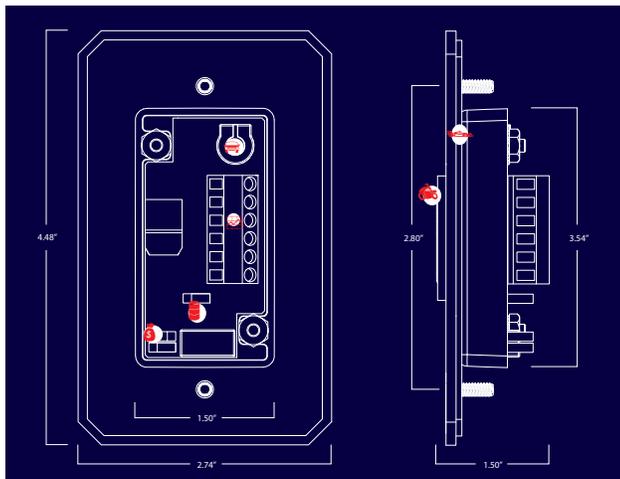

- Button & LED
- Steel Plate
- Hold Time
- Terminal Block
- Safe / Secure
- LED Control

The Piezo Button incorporates piezoelectric technology to convert physical

- Touch (pressure) of the push button from mechanical to electrical energy. Status illumination can be set to red, green, or no illumination
- Selectable Fail Safe and Fail Secure options
- Hold timer lasts from as little as 1 second to as much as 40 seconds
- The Piezo button provides for a NO / NC contact
- Stainless steel construction is designed for all weather use
- Designed specifically for Request to Exit / access control applications
- Button switch life exceeds 1 billion cycles

International Door Closers, Inc.

COPYRIGHT 2018 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com




300 MHZ TRANSMITTERS & RECEIVERS

RF-300

DIGITAL RADIO TRANSMISSION

FEATURES

- Hand-held transmitters outfitted with flag connectors, plug directly into most of IDC's push plate switches.
- Analog radio control for strong, short-range, transmissions
- Transmitters are programmed to the receiver through dip switch settings which offer up to 1,024 unique identifier codes.

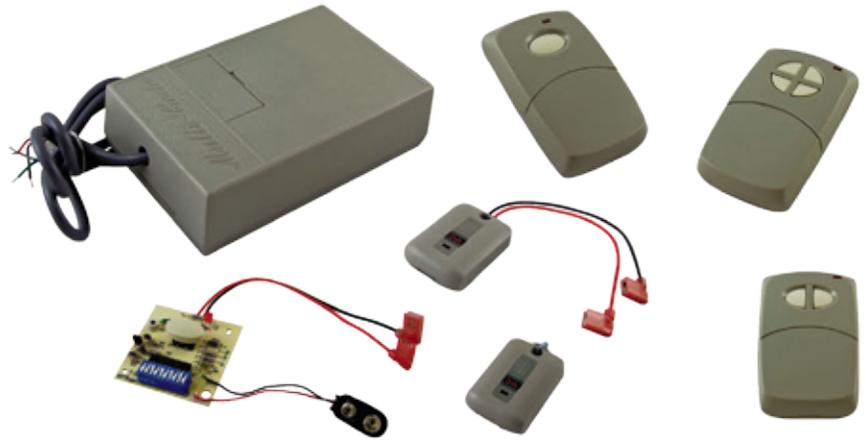

Easy Installation And Programming

IDC's 300 MHz frequency analog radio control transmitters and receivers are universally compatible with any type of automatic door application. With the ability to recognize 1,024 unique codes per receiver, the RF-300 offers an easy-to-install alternative and makes adding new transmitters simple.

RF-300 Series



10R300
300 MHz
Receiver



10T300HH
One Button
Transmitter



10T300HHDBL
Two Button
Transmitter




10T300HH4
Four Button
Transmitter



10T300KEYCHAIN
12v Keychain
Transmitter



10T300MINIPB
12v Wired
Transmitter



10T300PB
9v Wired
Transmitter

How It Works



International Door Closers, Inc.

COPYRIGHT 2018 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com