


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
-	FOR COMPUTER	03/21/06	-
01	HOLE PATTERN UPDATE	4/22/2009	MAM
02	UPDATED DOOR WEIGHT	5/20/2013	MAM

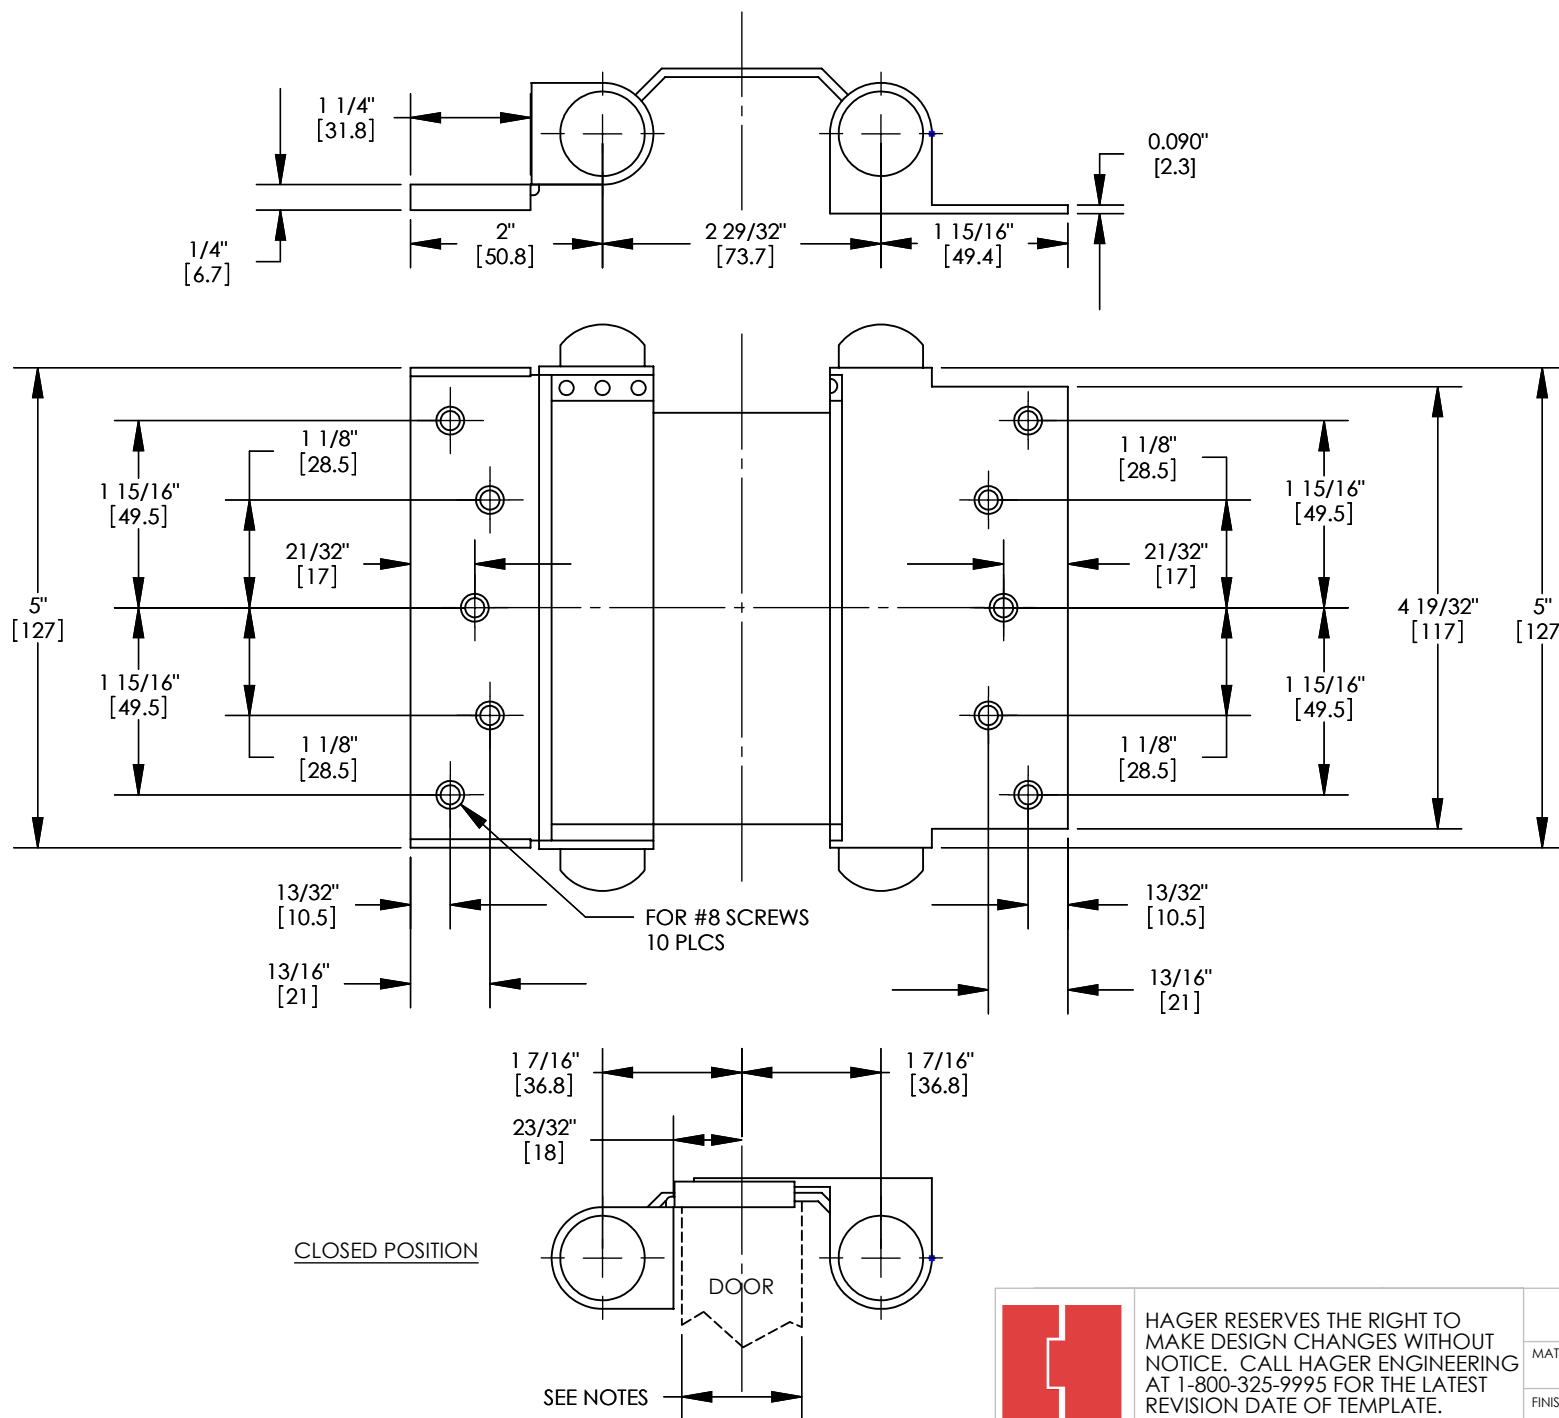

NOTES:
 MAXIMUM DOOR THICKNESS
 WITH CHAMFER - 1-1/2" [38.1]

MAXIMUM DOOR THICKNESS - 1-3/8" [34.9]

MINIMUM DOOR THICKNESS - 1-1/8" [28.6]

DOOR - 90LBS. OR LESS

3 HINGES PER DOOR



HAGER RESERVES THE RIGHT TO MAKE DESIGN CHANGES WITHOUT NOTICE. CALL HAGER ENGINEERING AT 1-800-325-9995 FOR THE LATEST REVISION DATE OF TEMPLATE.

PRIMARY DIMENSIONS SHOWN IN INCHES, DIMENSIONS IN [] ARE MILLIMETERS.

DRAWN	DMH	03/21/06
ENG. APPR.	MAM	03/22/06
Q.A.		
TOLERANCES:		
FRACTIONAL: ±0.015"		
ANGULAR: MACH: ± 1° BEND: ± 1°		
TWO PLACE DECIMAL: ±0.01"		
THREE PLACE DECIMAL: ±0.004"		
MATERIAL	STEEL	
FINISH	CUSTOMER SPECIFIED	
DO NOT SCALE DRAWING		

1303 5" DOUBLE ACTING SPRING HINGE TEMPLATE

SIZE	DWG. NO.	T-CT00044	REV.	02
B	SCALE: 1:2	WEIGHT: N/A	SHEET 1 OF 1	