
The global leader in door opening solutions



- 1. Place chassis at proper position on the door (knob retainer facing edge of door) and secure with mounting screws.
- 2. Rotate rose as desired and tighten securely by using the spanner wrench.
- 3. Slide knob onto spindle. With knob retainer hole in knob facing edge of door, push until retainer snaps into place.

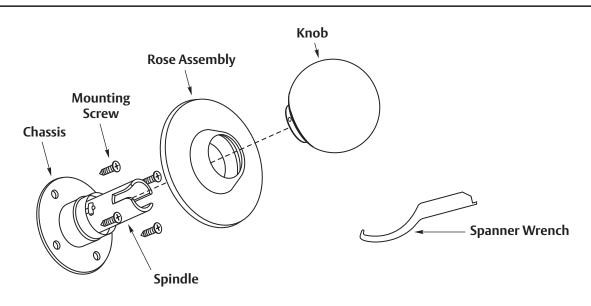