


# EntryCheck™ 923 Series Digital Keypads



The SDC EntryCheck™ 923 series narrow indoor/outdoor stand-alone digital keypads are designed to control access of a single entry point for facilities with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock.

The SDC EntryCheck™ 923P adds HID proximity reader capability to the keypad. The 923PW is designed to interface with most access control systems and provides a standard 26-bit Wiegand output.

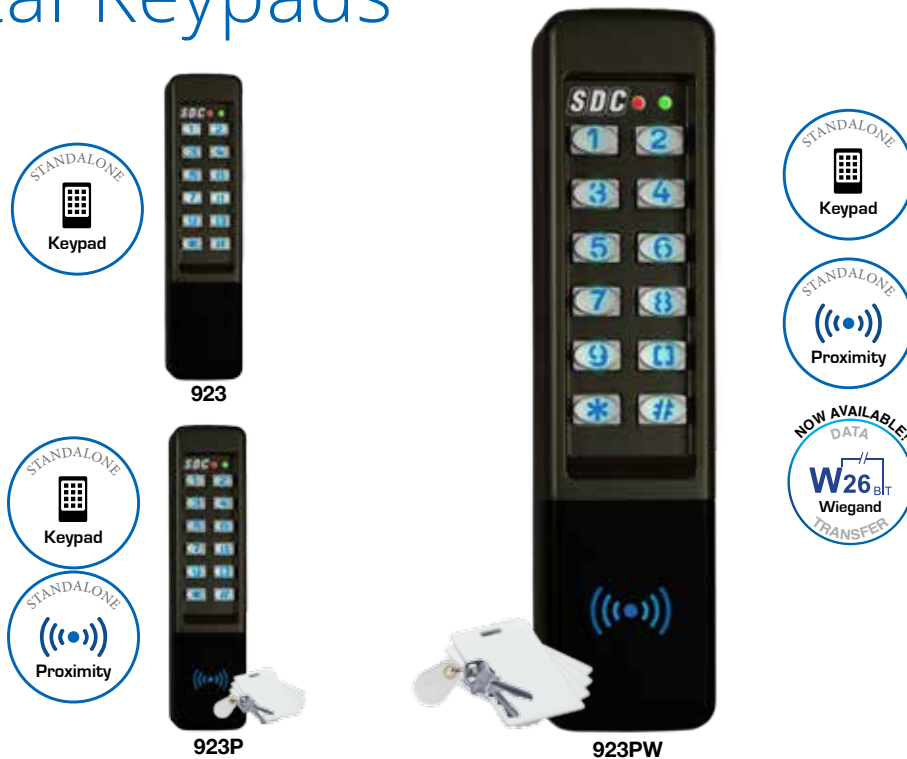

## FEATURES

- Narrow Digital Keypad with or without Wiegand Output for Universal Compatibility
- Weather & Vandal Resistant Housing with Tactile Metal Keys
- HID-Compatible Proximity Reader (923P and 923PW only)
- 12-Key Illuminated, 2" x 6" Keypad
- Surface, Mullion, or Single-Gang Mount
- Built-In Tamper Switch
- Programmable Site Code (923PW)
- Dual LED Status Indicators
- Adjustable Audible Annunciation
- Configurable Illumination: On, Off, Timed





## PROX ONLY:

3 User Modes:

- PIN or Card
  - Card Only
  - Card and PIN
- HID-Compatible: 125kHz-RFID)



## MODELS


- 
**923** Standalone Digital Narrow Keypad
- 
**923P** Standalone Digital Narrow Keypad with Prox Reader
- 
**923PW** Digital Narrow Keypad with Prox Reader and Wiegand Output 



## PROGRAMMING OPTIONS

The 923 EntryCheck™ series includes a Door Sense/Inhibit Input feature. When programmed for “Door Sense”, a door position switch wired into the input and detects a “forced entry” or “door ajar” condition. When programmed for “Inhibit Input”, a maintained switch or automatic timer wired into the input will disable the activa-

tion of the main relay. The EntryCheck™ also has a request-to-exit input for connection to an exit switch and/or fire access key switch for fire/emergency access. When access is granted, the shunt option is activated shunting alarm contacts on the door or gate. This prevents triggering of an alarm during authorized access.

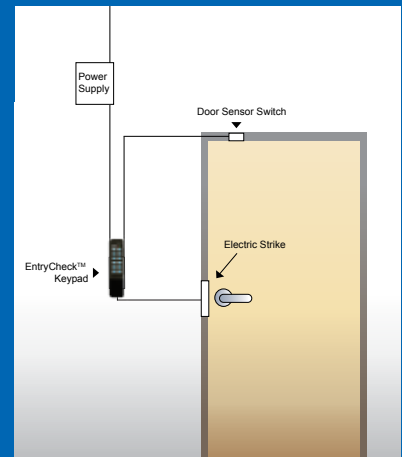

### 923 & 923P SPECIFICATIONS







<b>Voltage</b>	12/24 VAC/DC
<b>Current</b>	30mA Typical, 150mA Maximum
<b>Outputs (923/923P)</b>	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 – 100mA @ 30VDC
<b>Temperature</b>	-4°F to +140°F (-20°C to +60°C)
<b>Humidity</b>	5% to 95% Non-Condensing
<b>Finish</b>	Powder Coat Painted Cast Metal
<b>Mount</b>	Surface Mount
<b>Housing</b>	1-3/4"W x 7-5/16"H x 1-3/8"D (1.5" Wall Projection)
<b>Weight</b>	1.65 lbs

### 923PW SPECIFICATIONS

<b>Keypad Housing</b>	Powder Coat Painted Cast Metal
<b>Voltage</b>	5-16VDC
<b>Current</b>	30mA Typical, 60mA Max.
<b>Reader Output</b>	26-bit Wiegand
<b>Reader Frequency</b>	125kHz
<b>Keypad Output</b>	26-bit Wiegand or 4-bit Word
<b>Wiring</b>	6" Pigtail
<b>Temperature</b>	-4°F to +140°F (-20°C to +60°C)
<b>Humidity</b>	5% to 95% Non-Condensing
<b>Dimensions</b>	1-3/4"W x 7-5/16"H x 1-3/8"D (1.5" Wall Projection)
<b>Weight</b>	1.65 lbs

### ACCESSORIES

#### PROX CARDS AND KEY FOBs

-  **HID1326-25** Proximity Card , 25 Cards
-  **HID1326-100** Proximity Card, 100 Cards
-  **HID1346-10** Proximity Key Fob, 10 Key Fobs
-  **HID1346-100** Proximity Key Fob, 100 Key Fobs
-  **PTAG-10** Proximity Disc Tag, 10 Tags
-  **PTAG-25** Proximity Disc Tag, 25 Tags

