


A570TW

Full Surface Thru Wire Hinge

Introducing ABH's New Electrified Full Surface Hinge with concealed thru wires to carry electrical current between the frame and door. This 5" removable section is used with our Full-Length Full Surface Models, A570 & A571.

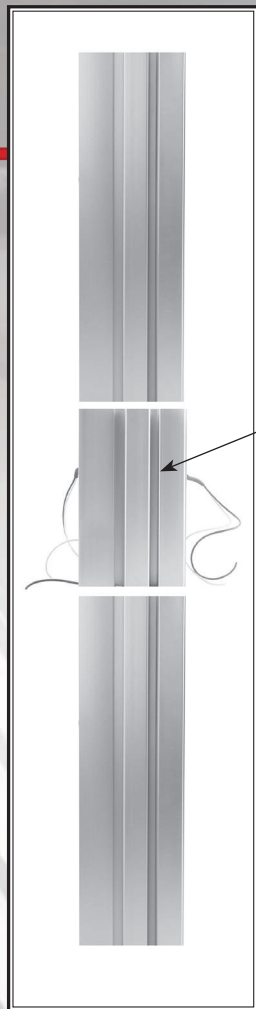

5" TW Section
(Front View)



(Open Hinge)



(Back View)

Standard Features:

- For Full Surface Applications
- 5" Removable Section - For ease of installation
- 2 (22ga.) Super Flex Wire Standard
- Available in Standard Finishes
 - Clear Anodized
 - Dark Bronze Anodized
 - Black Anodized

Specifications

Discription:	Single Conductor #22 AWG miniature hook-up Wire for applications requiring extreme flexibility.
Conductor:	#22 AWG 168/44 (0.002") Soft Bare Copper LHL.
Insulation:	Proprietary formulation PVC 0.010" NOM. Wall meets VW-1 Flame requirements.
Diameter:	0.053" ± 0.003"
Resistance:	16.7 OHMS MAX. @ 20°C, per 1000 ft.
Voltage Rating:	600 Volts RMS, depending on specification.

Available as RoHS Compliant.