

EXIT DEVICE INSTALLATION INSTRUCTIONS

K-109 SWITCH KIT



CORBIN RUSSWIN ED4000, ED5000 AND YALE 7000 SERIES EXIT DEVICES
SWITCH MONITORS EGRESS BY PUSHBAR ACTIVATION OF EXIT DEVICE

ELECTRICAL SPECIFICATIONS

- SPDT MONITOR SWITCH
- CONTACT RATING: 4 AMP @ 250VAC

COLOR CODE FOR WIRES

- YELLOW WIRE: COMMON
- RED WIRE: NORMALLY OPEN
- GRAY WIRE: NORMALLY CLOSED

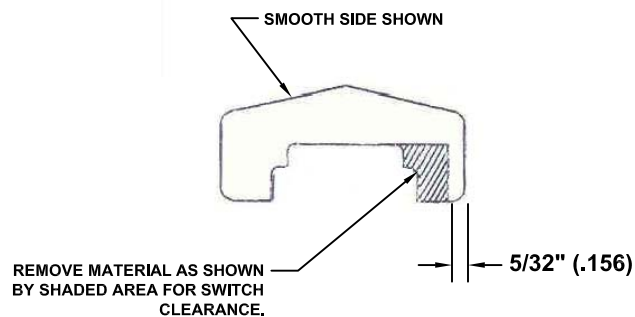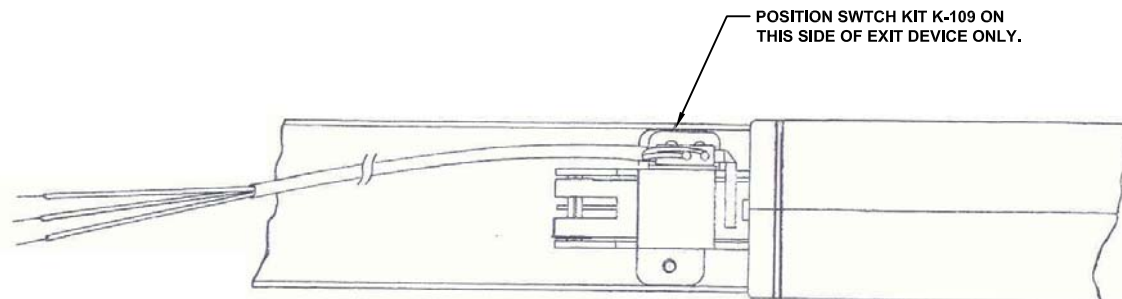

INSTALLATION INSTRUCTIONS

- STEP 1: REMOVE REAR COVER AND BOTTOM CHANNEL COVER.
- STEP 2: LOCATE EXPOSED REAR CRASH BAR MECHANISM.
- STEP 3: REMOVE SCREW INDICATED IN ILLUSTRATION FROM BOTTOM OF DEVICE AND DISCARD.
- STEP 4: POSITION SWITCH BRACKET AS SHOWN AND REPLACE WITH SCREW THAT IS PROVIDED.
- STEP 5: MODIFY REAR BLACK END CAP COVER AS SHOWN.
- STEP 6: REPLACE BOTTOM CHANNEL, COVER AND REAR END CAP.

