


• Prepare these holes only when 3148 or 3158 drop plate is used.

Opening	Dim. A	Dim. B
To 120°	9-5/8" (244)	3-3/4" (95)
Over 120°	7-1/8" (181)	1-1/4" (32)

POSITION OF ARM AND PINION GROOVE

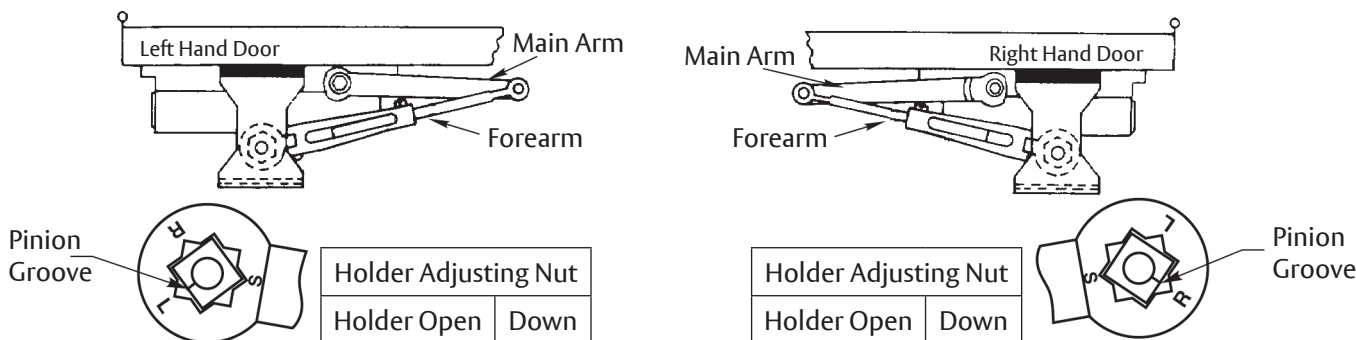

Notes:

1. Do not scale drawing
2. Left hand door shown.
3. Dimensions: inches / (mm)
4. Hollow metal doors require channel or box type reinforcement when through bolt mount is specified.
5. Sex bolt required on wood or plastic faced fire door mounting.
6. Minimum thickness recommended for reinforcements in hollow metal doors and frames: .105 (2.66) unless otherwise noted.

Experience a safer and more open world

Copyright © 2012, 2023, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

2711 Hold Open Door Closer
Parallel Arm Application With 589L & 588 Brackets
With or Without 3148 or 3158 Drop Plate

Template Number:
7327-0212
Sheet: 1 of 1
Date: 12/23

ASSA ABLOY

1-800-438-1951
www.assaabloy.com