


DOOR OPENING ANGLE		DIMENSIONS SHOWN IN INCHES			
HOLD OPEN	DEAD STOP	BUTT HINGE OR OFFSET PIVOTS		CENTER PIVOTS	
		A	B	A	B
85°	90°	5-5/8 (143)	11-1/8 (283)	5-1/2 (140)	11 (279)
90°	95°	4-7/8 (124)	10-3/8 (264)	4-3/4 (121)	10-1/4 (260)
95°	100°	4-1/8 (105)	9-5/8 (244)	3-7/8 (98)	9-3/8 (238)
100°	105°	3-1/2 (89)	9 (229)	3-1/4 (83)	8-3/4 (222)
105°	110°	2-7/8 (73)	8-3/8 (213)	2-5/8 (67)	8-1/8 (206)
110°	115°	2-1/4 (57)	7-7/8 (200)	2 (51)	7-5/8 (194)

- Do not scale drawing.
- Left hand door shown.
- Dimensions are in inches (mm) unless otherwise noted.
- Hollow metal doors require channel or box type reinforcement when thru bolt mount is specified.
- Sex bolts may be required for wood or plastic faced fire door mounting.
- Minimum thickness recommended for reinforcements in hollow metal doors and frames: .1046" (2.66mm) unless otherwise noted.
- Hold Open Arms are designated by a "T" suffix; are not permitted to be used on fire doors.

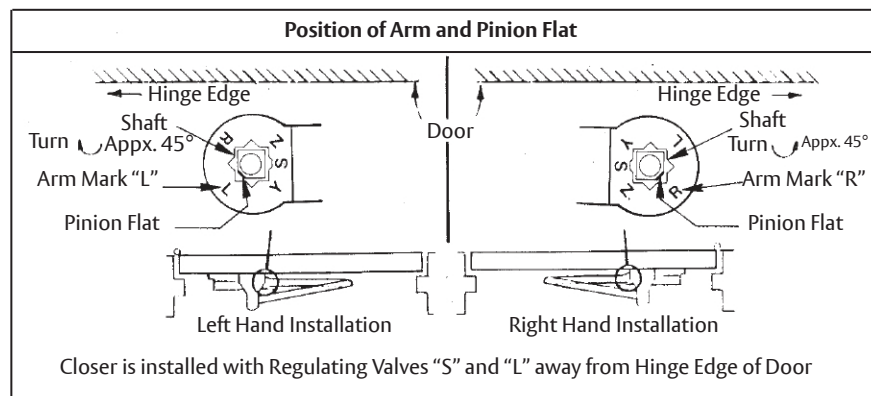

Experience a safer and more open world

Copyright © 2010, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

3020(T) Series Holder/Stop Door Closers
With or Without 3158 Drop Plate
Series 3120, 3320, and 3520
Sized and Multi-size Units

Template Number:
7303-0301
Sheet: 1 of 1
Date: 01/24

ASSA ABLOY

1-855-557-5078
www.assaabloy.com