


Opening	Dim. "A"
To 100°	7-5/8 (194)
100 to 120°	6-5/8 (168)
120 to 150°	4-5/8 (117)
150 to 180°	4-1/8 (105)

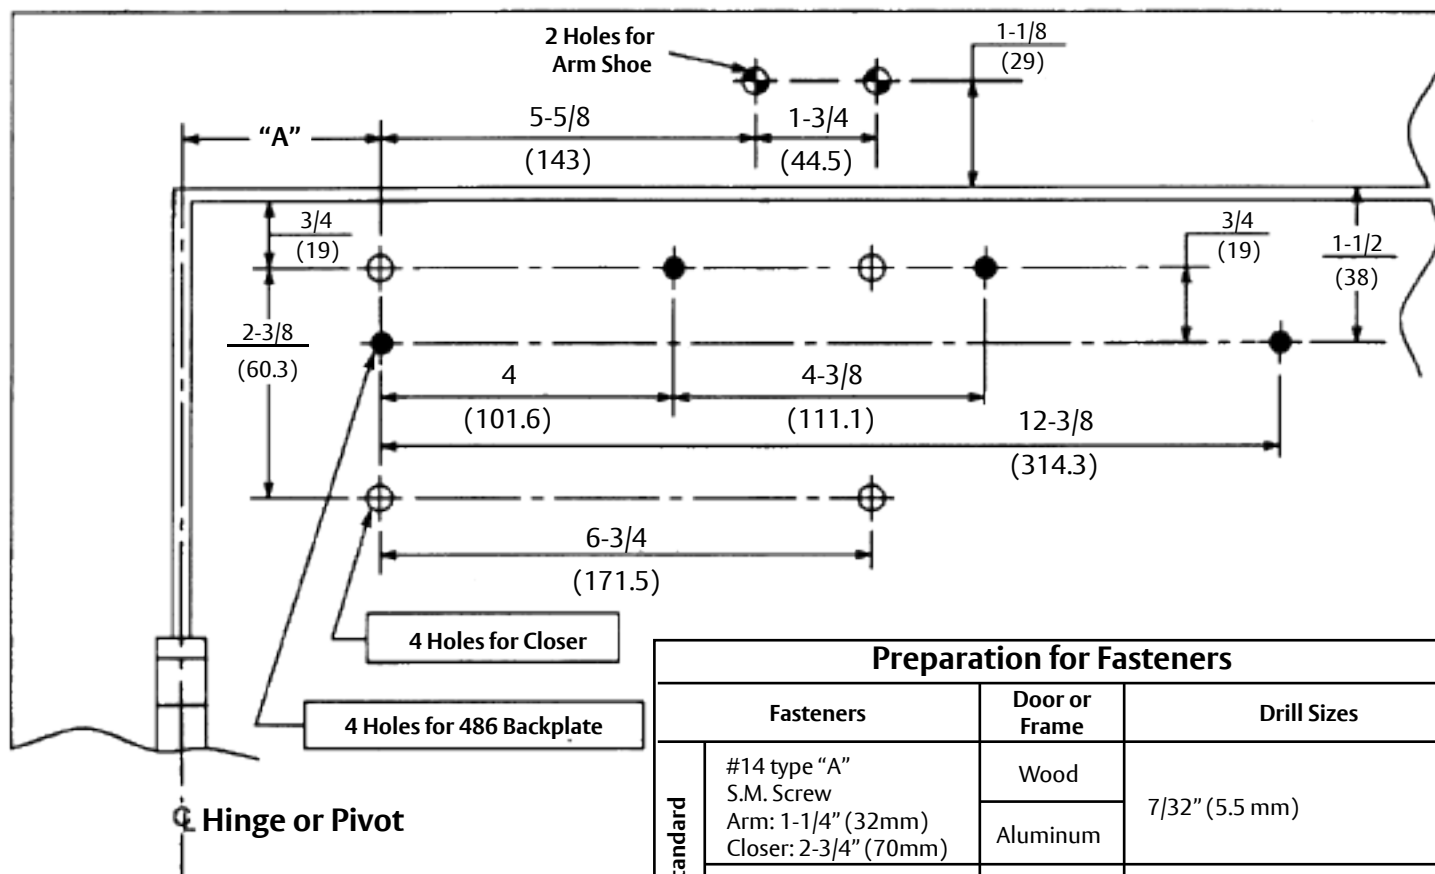

Caution: Door swing may be limited by door, frame, wall or hardware conditions (including closer projection).

Notes

1. Do not scale drawing.
2. Right hand door shown.
3. Dimensions are in inches (mm).
4. Hollow metal doors require channel or box type reinforcement when thru bolt mount is specified.
5. Sex bolts may be required for wood or plastic faced fire door mounting.
6. Minimum thickness recommended for reinforcements in hollow metal doors and frames: 01046" (2.66mm) unless otherwise noted.

Preparation for Fasteners				
		Fasteners	Door or Frame	Drill Sizes
Standard	#14 type "A" S.M. Screw Arm: 1-1/4" (32mm) Closer: 2-3/4" (70mm)		Wood	7/32" (5.5 mm)
			Aluminum	
	1/4-20 machine screw		Metal	drill: #7 (.201") tap: 1/4-20
Optional	Sex nuts and bolts		Hollow Metal	9/32" (7.00mm) thru; 3/8" (9.50mm) on door or transom face opposite to closer
			Aluminum or Wood	3/8" (9.50mm.) thru
	Thru bolts and grommet nuts		All	9/32" (7.00mm) thru; 3/8" (9.50mm) dia. x 3/8" (10mm) deep on door or transom face opposite to closer

Experience a safer and more open world

400 Series Door Closers- Sized 2 thru 6
4400 Series Door Closers-Multi-Size 1 to 6
With or Without 486 Backplate
Regular Non-Hold Open Arm Application

Template Number: 7344-0101
Sheet: 1 of 1
Date: 12/23

ASSA ABLOY

1-855-557-5078
www.assaabloy.com