


DO NOT SCALE

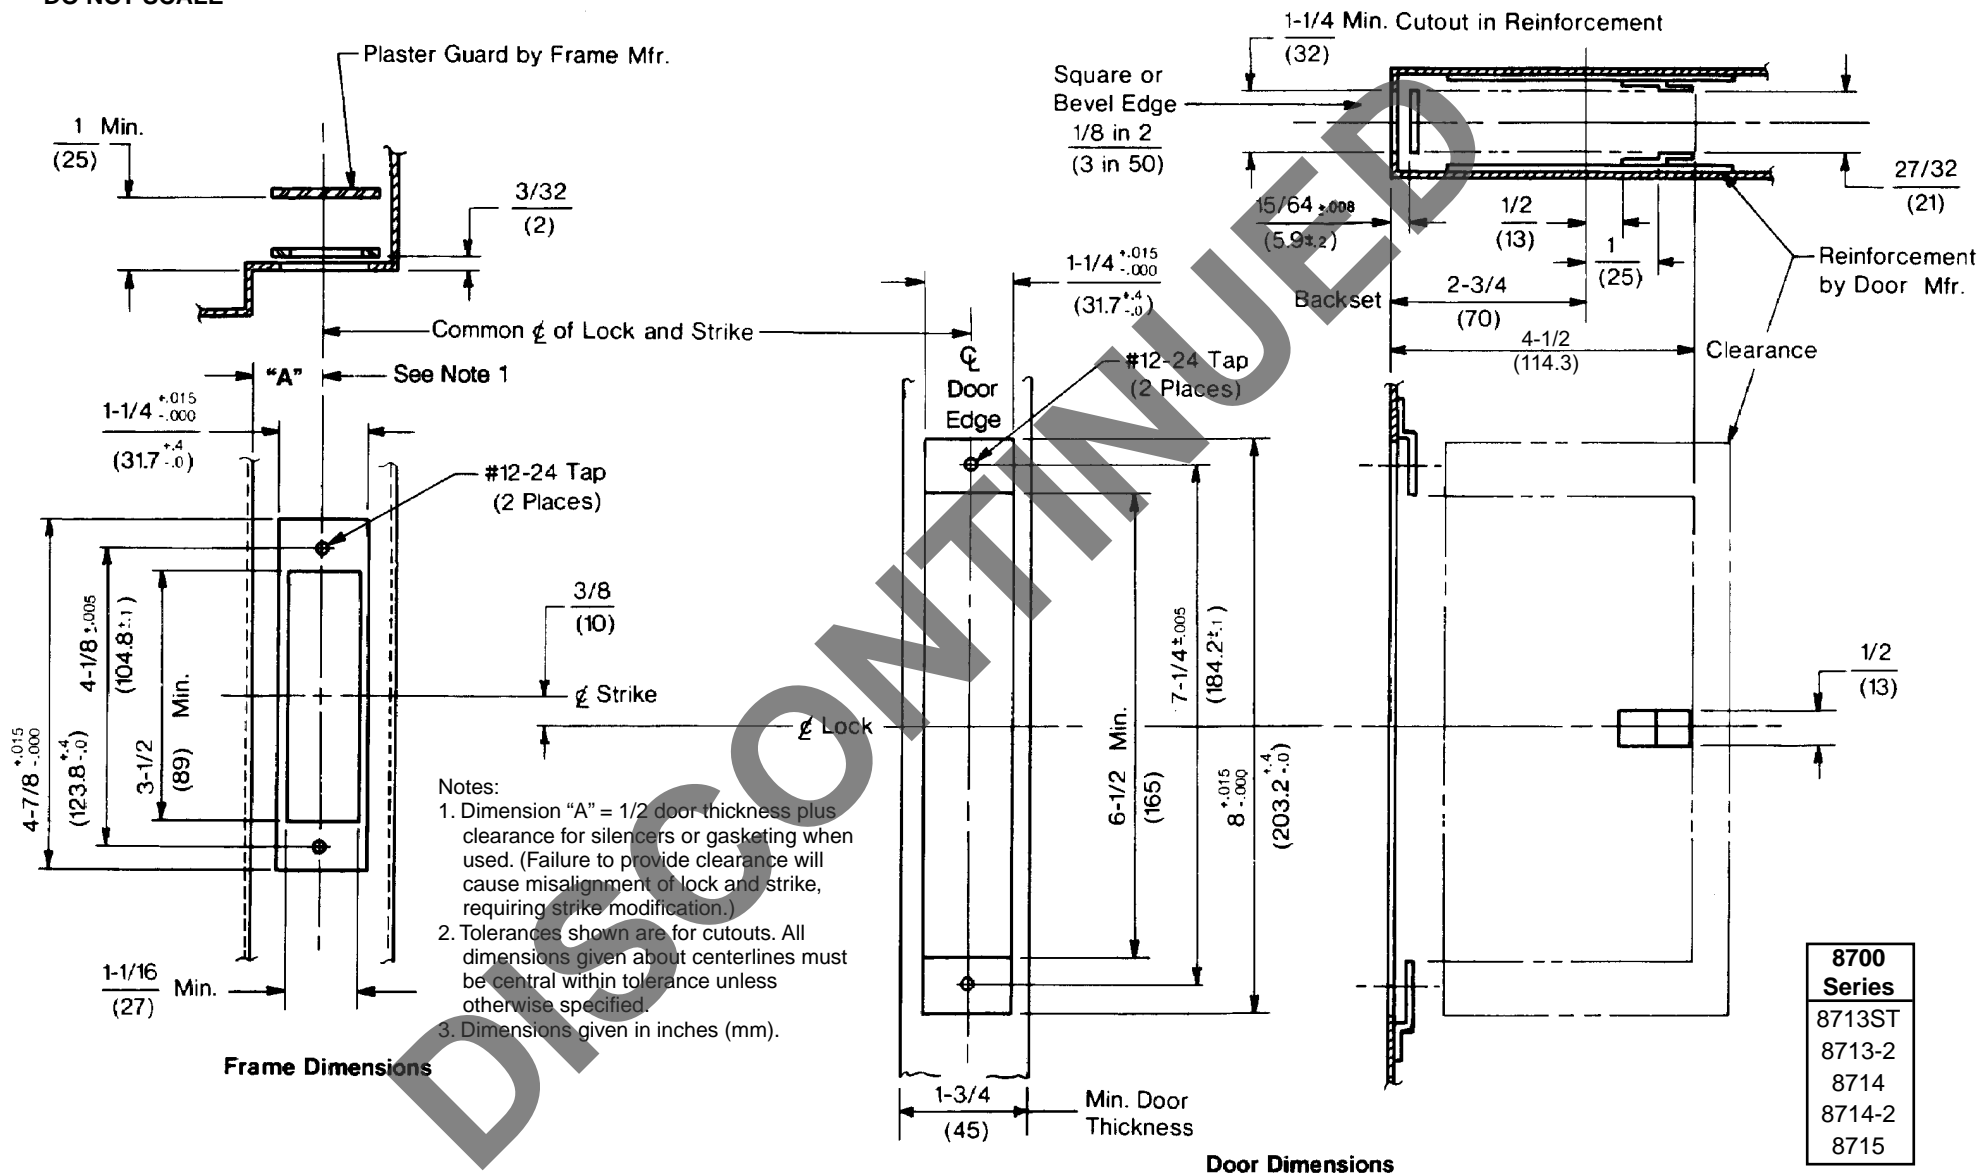

- Notes:
1. Dimension "A" = 1/2 door thickness plus clearance for silencers or gasketing when used. (Failure to provide clearance will cause misalignment of lock and strike, requiring strike modification.)
 2. Tolerances shown are for cutouts. All dimensions given about centerlines must be central within tolerance unless otherwise specified.
 3. Dimensions given in inches (mm).

8600 & 8700 Mortise Deadlocks (Only)
H.M. Door and Frame
Lock and Strike Preparation (2814 Strike)

Yale
 Yale Commercial Locks and Hardware
 www.yalecommercial.com

TEMPLATE NUMBER	7086-0010	DATE	1-06
-----------------	-----------	------	------