


Opening	Dimension "A"		Dimension "B"	
	Inches	mm	Inches	mm
To 120°	9-5/8	244	3-3/4	95
*Over 120°	7-1/8	181	1-1/4	32
*Door openings to 180° swing, conditions permitting				

- Do not scale drawing.
- Left hand door shown.
- Dimensions are in inches (mm) unless otherwise noted.
- Hollow metal doors require channel or box type reinforcement when thru bolt mount is specified.
- Sex bolts may be required for wood or plastic faced fire door mounting.
- Minimum thickness recommended for reinforcements in hollow metal doors and frames: .1046" (2.66mm) unless otherwise noted.
- Hold Open Arms are not permitted to be used on fire doors.

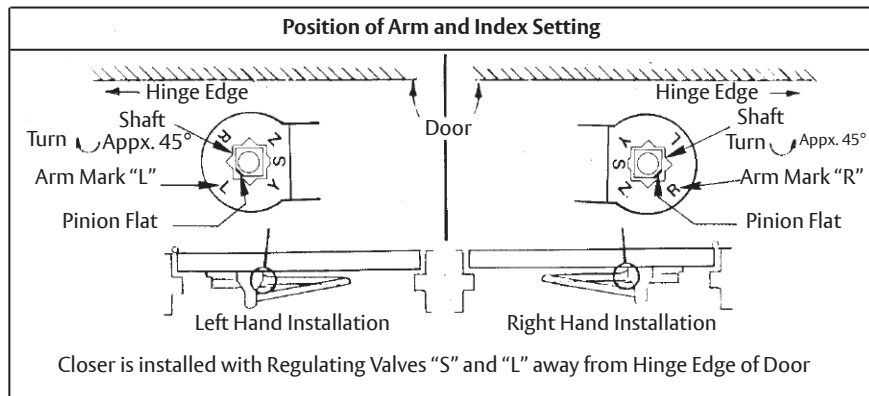

Experience a safer
and more open world

Copyright © 2010, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

PR3000 , PR3010 Series Door Closers with 293L Bracket for Flush Transoms
With or Without 3158 Drop Plate
Parallel Rigid Non Hold Open or Hold Open Arm Application
Series PR3100, PR3300, and PR3500
Sized and Multi-size Units

Template Number:
7303-0252
Sheet: 1 of 1
Date: 01/24

ASSA ABLOY

1-855-557-5078
www.assaabloy.com