


Opening	Dimension "A"		Dimension "B"	
	inches	mm	inches	mm
To 120°	9-1/2	241	3-3/4	95
Over 120°*	7	178	1-1/4	32

* Door openings to 180° conditions permitting

- Do not scale drawing.
- Left hand door shown.
- Dimensions are in inches (mm)
- Maximum butt hinge width for this template is 5" (127).
- Hollow metal doors require channel or box type reinforcement when thru bolt mount is specified.
- Minimum thickness recommended for reinforcements in hollow metal doors and frames: .1046" (2.66mm) unless otherwise noted.
- Hold Open Arms are not permitted to be used on fire doors.

Position of Arm and Pinion Flat

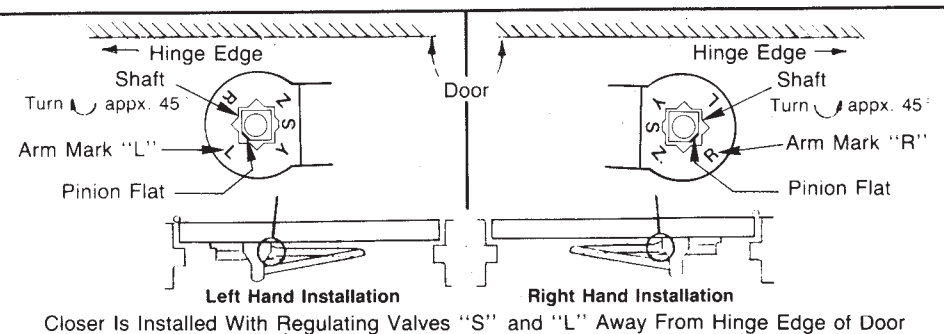

**PR2501 or PR2511 Door Closer With or Without 3158 Drop Plate
Parallel Rigid Application With Non Hold Open or Hold Open Arms
Multi-size Units**

Yale 100 Yale Ave.
Lenoir City, TN 37771-3226
1-800-438-1951
www.yalelocks.com

TEMPLATE NUMBER **7325-0251** DATE **07-10**