



# Assembly Instructions


80-9300-0001-010 (03-09)

### CAUTION


An incorrectly installed or improperly adjusted door closer can cause property damage or personal injury. These instructions should be followed to avoid the possibility of misapplication or misadjustment.

## Supplemental Sheet for Stop Arm w/ Spring or Holder/Stop Arm w/ Spring


4030KIT to be used with these arm assemblies:



**Parallel Rigid**  
(Non-Hold Open or Hold Open Arms)

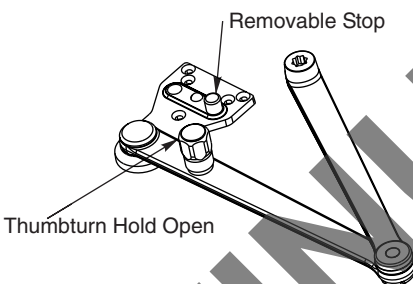


**Holder/Stop Thumbturn Arm Assembly**

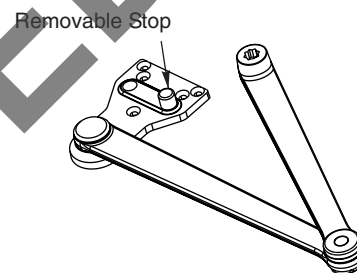


**Stop Only Arm Assembly**

### Assembly Instructions

- **New Arm Only:**  
Determine hand of arm required and remove appropriate hole cap. Position spring buffer assembly on soffit plate and using 5/32" hex wrench provided, thread assembly to soffit plate.
- **Existing Arm Only:**  
Remove stop from existing plate using 5/32" wrench provided, position spring buffer assembly on soffit plate and thread assembly to soffit plate using the 5/32" hex wrench.

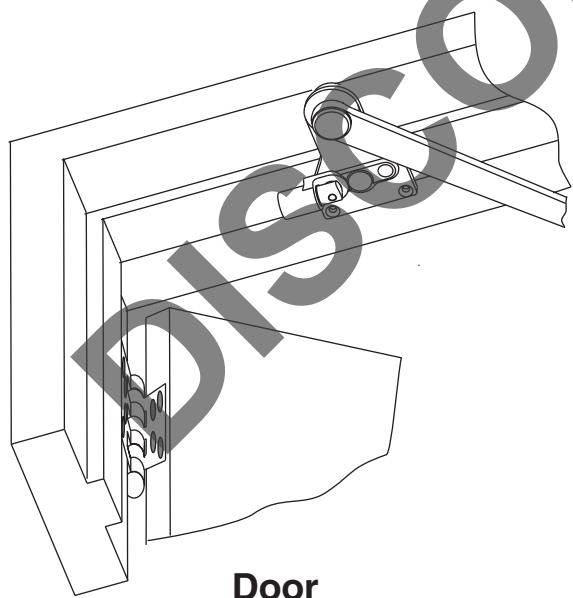

**Door**  
(Left Hand Shown)

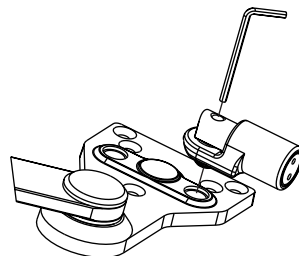

•Where severe or abusive conditions are expected a separate door stop, supplied by others, is recommended to assist in preventing damage to the door closer, closer arm; or to the door, frame or adjacent walls.



An ASSA ABLOY Group brand

3000 Highway 74 East • Monroe, NC 28112  
Tel: (800)-438-1951 • Fax: (800)-338-0965  
www.yalecommercial.com