

Yale® and Symphony® are registered trademarks of Yale Security Inc., an ASSA ABLOY Group company. Copyright © 2009, 2013, Yale Security Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

**Notes:**


1. Backset is measured from centerline of bevel which is centerpoint of door thickness.
2. Door prep with 2-3/4" (69.9) backset meets ANSI/BHMA standards A156.115 for steel doors and A156.115-W for wood doors plus through bolt holes shown.
3. Dimensions given in inches and (mm).
4. 1-1/4" strike lip suits frame for 1-3/4" thick door. Lip will vary for other door thicknesses.
5. (\*\*) Inside only. Wire clearance.
6. Sheet 2 shows how prep details are affected by handing.
7. An external door position switch (model number DPS1) is included. Use and installation location to be specified by others.

BACKSET "A"	
2-3/4 (69.9)	Standard
3-3/4 (95.3)	Optional
5 (127)	




S5400LN x SYM Series


**CAUTION: DOOR AND FRAME MANUFACTURERS**  
When door gasketing or silencers are used, proper allowances must be made for strike location to maintain a common centerline with lock and door as shown so that bolt will freely enter strike.

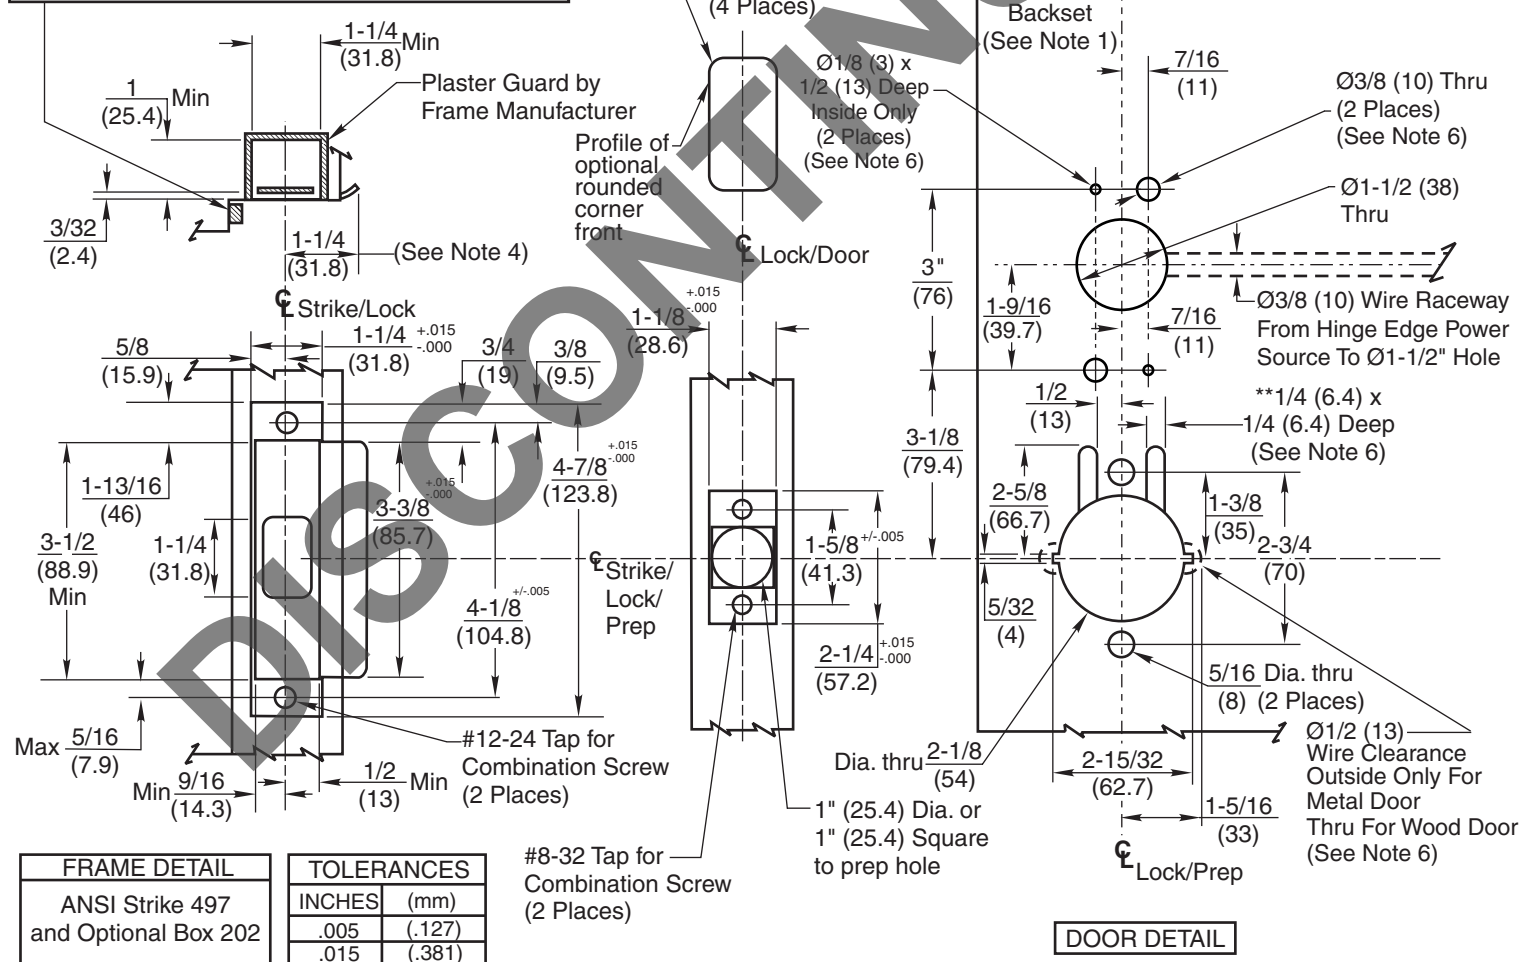

### LH/LHR DOORS

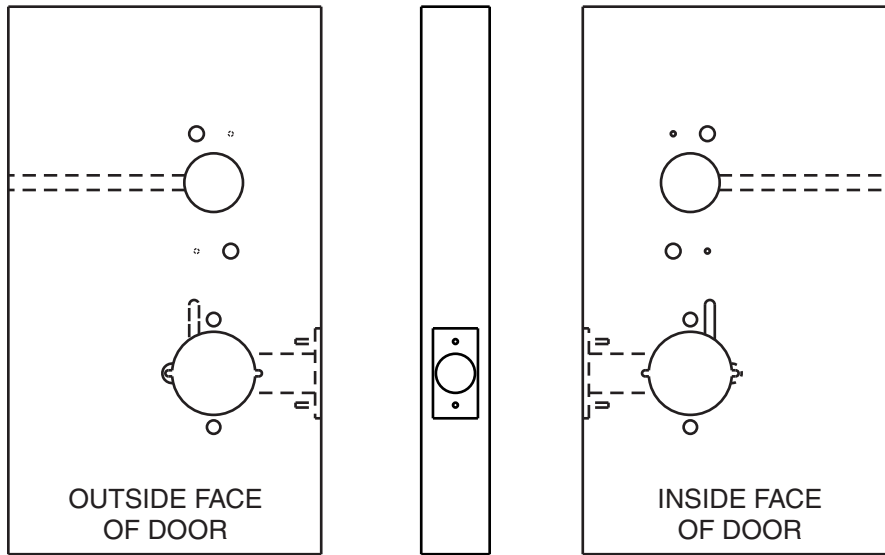

### RH/RHR DOORS

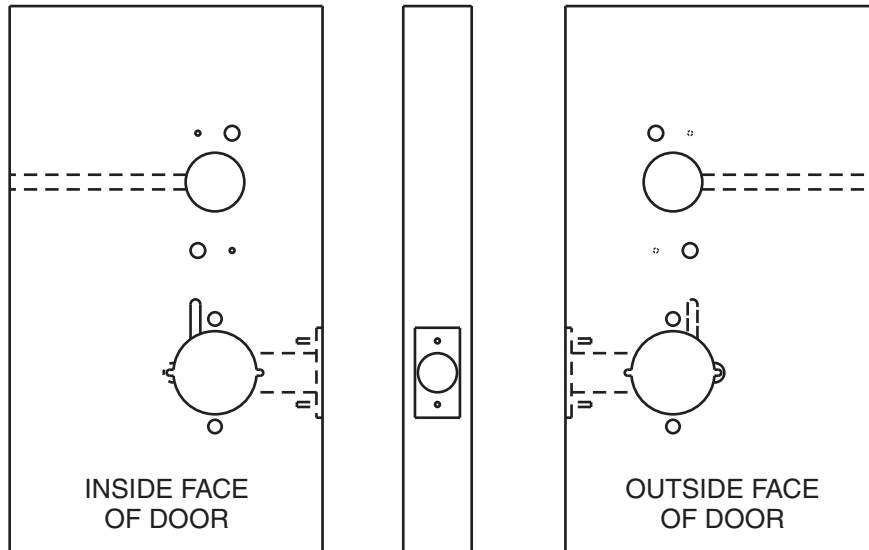

**Note:**

An external door position switch (model number DPS1) is included. Use and installation location to be specified by others.

**Symphony® S5400LN Series  
Cylindrical Lever Lock  
Wood or Hollow Metal Door Preparation**



1-800-438-1951  
www.yalelocks.com

TEMPLATE NUMBER	SHEET	DATE
7150-8011	2 of 2	03-13