


Notes:

1. Right hand door shown.
2. Do not scale drawing.
3. Dimensions are given in inches (mm).
4. Minimum ceiling clearance for unit is 4-5/8" (118mm).
5. Series TJ1400ST or TJ4410ST are not permitted to be used on fire doors.
6. Maximum door opening
 - Non Hold Open with Spring Buffer -110°
 - Non Hold Open without Spring Buffer -180°
 - Hold Open -110°

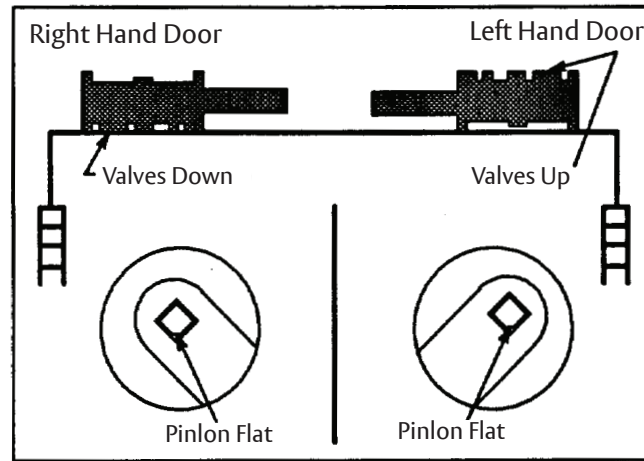

Preparation for Fasteners		
Fasteners	Door or Frame	Drill Sizes
#14 type "A" S.M. screw	Wood	7/32" (5.50mm)
1/4"-20 machine screw	Metal	drill: #7 (.201") tap: 1/4"-20
Sex nuts and bolts (Optional)	Hollow Metal	9/32" (7.00mm) thru; 3/8" (9.50mm) door face opposite to closer
	Aluminum or Wood	3/8" (9.50mm.) through
Thru bolt and grommet nuts (Optional)	All	9/32" (7.00mm) thru; 3/8" (9.50mm) dia. x 3/8" (10mm) deep door face opposite to closer

Experience a safer and more open world

Copyright © 2004, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

TJ400ST, TJ1400ST Series Door Closer - Sized 4 thru 6
TJ4400ST, TJ4410ST Series Door Closer - Multi-Size 1 to 6
 With Backplate No. 486JP
Top Jamb Hinge Side Slide Track Application, Non-Hold Open or Hold Open

Template Number: 80-7344-0515-010
 Sheet: 1 of 1
 Date: 01/24

ASSA ABLOY

1-855-557-5078
www.assaabloy.com