


Opening		Dim. A	Dim. B	Dim. C
Hold Open★	Stop			
85°	90°	12-3/4 (324)	11 (279)	12 (305)
90°	95°	12-1/8 (308)	10-3/8 (263.5)	11-3/8 (289)
95°	100°	11-1/2 (292)	9-3/4 (248)	10-3/4 (273)
100°	105°	11 (279)	9-1/4 (235)	10-1/4 (260)
105°	110°	10-1/2 (267)	8-3/4 (222)	9-3/4 (248)
110°	115°	10-1/8 (257)	8-3/8 (213)	9-3/8 (238)

★ Door must be free to swing 5° beyond hold- open position.

**Notes:**

- Do not scale drawing.
- All dimensions shown in inches.
- Left hand door shown.
- Hollow metal doors require channel or box type reinforcement when thru-bolt mount is specified.
- Sex-bolts may be required for wood or plastic faced fire door mounting.
- Minimum thickness recommended for reinforcements in hollow metal doors and frames: .1046" (2.66mm).
- UNI-150 Series have a hold open arm feature and are not permitted to be used on fire door assemblies.

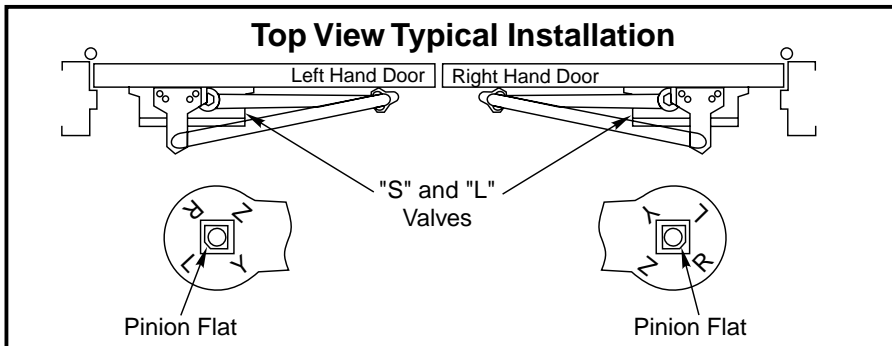

Fastener	Door or Frame	Drill
SNB	hollow metal	9/32" (7.00mm.) thru 3/8" (9.50mm.) door face opposite to closer
	aluminum or wood	3/8" (9.50mm.) thru

**UNI-50 Series Closer – Non Hold Open/Stop Arm**  
**UNI-150 Series Closer – Hold Open/Stop Arm**  
 Door Closer Sizes 1, 1BF, 2, 3, 4, 5, or 6  
 Flush Transom Parallel Arm Application with 589L Bracket  
 Doors 33" – 41" (0.85 - 1.00m) Wide

**Parallel Arm Installation Template —**  
**Flush Partitions**  
**Stop Only or Hold Open Unitrol**  
**Backcheck or Delayed Action Door Closer**  
**With or Without 214 Drop Plate**

**Yale®**  
 Yale Commercial Locks and Hardware  
 www.yalecommercial.com  
 Template Number **7350-2361** Date **6-99**