


Opening		Dim. A	Dim. B	Dim. C
Hold Open★	Stop			
85°	90°	15-1/8 (384)	13-1/4 (337)	14-1/4 (362)
90°	95°	14-3/8 (365)	12-1/2 (318)	13-1/2 (343)
95°	100°	13-3/4 (349)	11-7/8 (302)	12-7/8 (327)
100°	105°	13-1/8 (333)	11-1/4 (286)	12-1/4 (311)
105°	110°	12-5/8 (321)	10-3/4 (273)	11-3/4 (298)
110°	115°	12-1/8 (308)	10-1/4 (260)	11-1/4 (286)

★ Door must be free to swing 5° beyond hold- open position.

Notes:

- Do not scale drawing.
- All dimensions shown in inches.
- Left hand door shown.
- Hollow metal doors require channel or box type reinforcement when thru-bolt mount is specified.
- Sex-bolts may be required for wood or plastic faced fire door mounting.
- Minimum thickness recommended for reinforcements in hollow-metal doors and frames: .1046" (2.66mm).
- UNI-150 Series have a hold open arm feature and are not permitted to be used on fire door assemblies.

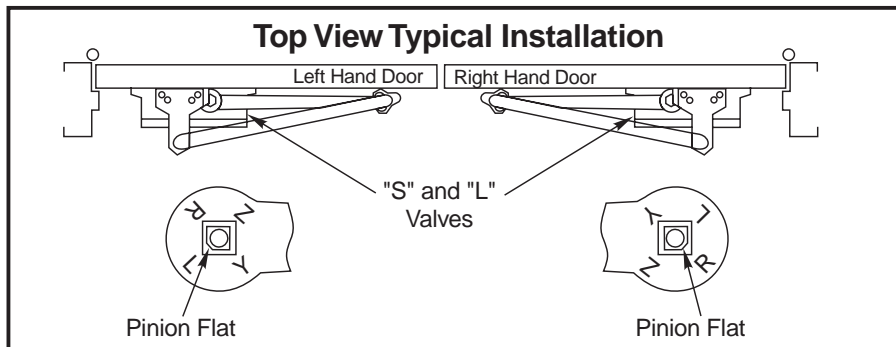

Fastener	Door or Frame	Drill
SNB	hollow metal	9/32" (7.00mm.) thru 3/8" (9.50mm.) door face opposite to closer
	aluminum or wood	3/8" (9.50mm.) thru

UNI-50 Series Closer – Non Hold Open/Stop Arm
UNI-150 Series Closer – Hold Open/Stop Arm
 Door Closer Sizes 1, 1BF, 2, 3, 4, 5, or 6
 Flush Transom Parallel Arm Application with 589L Bracket
 Doors 42" – 48" (1.05 - 1.20m) Wide

Parallel Arm Installation Template —
Flush Partitions
 Stop Only or Hold Open Unitrol
 Backcheck or Delayed Action Door Closer
 With or Without 214 Drop Plate

Yale®
Yale Security Inc.
 1902 Airport Road, MONROE, NC 28110

Template Number	Date
7350-2362	6-99