


- Notes:
- Do not scale drawing.
  - All dimensions shown in inches (mm).
  - Left hand door shown.
  - Caution: Hollow metal doors require channel or box type reinforcement. Hollow metal frames require full width header reinforcement.
  - UNI-TJ1400 and UNI-TJ4410 Series door closers have a hold open arm feature and are not permitted to be used on fire door assemblies.

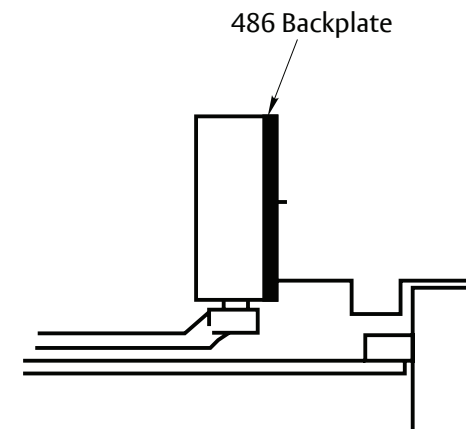

Preparation for Fasteners			
Fasteners	Application	Door or Frame	Drill Sizes
Sex nuts and bolts	Arm-foot	Hollow Metal	9/32" (7.00mm) through 3/8" (9.50mm) door face opposite to closer
		Aluminum or Wood	3/8" (9.50mm) through
#14 x 1-1/4" (32mm.) type "A" S.M. screws	7786 closer-backplate	Wood	7/32" (5.5mm.)
1/4-20 machine screw		Metal	drill: #7 (.201" dia.) tap: 1/4-20
Through bolts and grommet nuts	Optional	All	9/32" (7.00mm) through 3/8" (9.50mm) dia. x 3/8" (10mm) deep, door face opposite to closer

Door Opening Angle		Dimensions			
Hold Open	Dead Stop	Butts and Offset Pivots		Center Pivots	
		Dimension A		Dimension A	
		inches	mm.	inches	mm.
85°	90°	9-3/4	248	10-1/4	260
90°	95°	9-1/8	232	9-5/8	244
95°	100°	8-1/2	216	9-1/8	232
100°	105°	8	203	8-5/8	219
105°	110°	7-3/4	197	8-1/8	206
110°	115°	7-3/8	187	7-7/8	200

Experience a safer and more open world

Copyright © 2004, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

**UNI-TJ400,UNI-TJ4400 Series Non Hold Open/Stop Arm**  
**UNI-TJ1400,UNI-TJ4410 Series Hold Open/Stop Arm**  
 Closer Sizes 0 Multi-size 1-6 or Sizes 2, 3, 4, 5 or 6  
 Top Jamb Standard Application Top Jamb Installation Template Stop Only or Hold Open Unitrol Backcheck or Delayed Action Door Closer

Template Number:  
80-7344-1401-010  
Sheet: 1 of 1  
Date: 01/24

**ASSA ABLOY**

1-855-557-5078  
www.assaabloy.com