



NOTES:

1. Backset is measured from centerline of bevel which is the centerpoint of the door thickness.
2. 1-1/8 (28.8) Strike Lip suits frame for 1-3/4 (44.5) thick door. Lip will vary for other door thicknesses.
3. For preparation of trim, refer to separate template.
4. Dimensions given in inches and (mm).
5. Door fabricator to provide a Ø3/8 (9.5) minimum raceway through door to allow the insertion of electrical wires running between lock mortise and electric hinge.

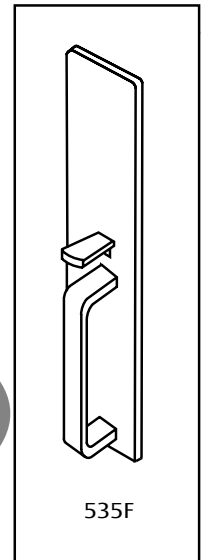

535F

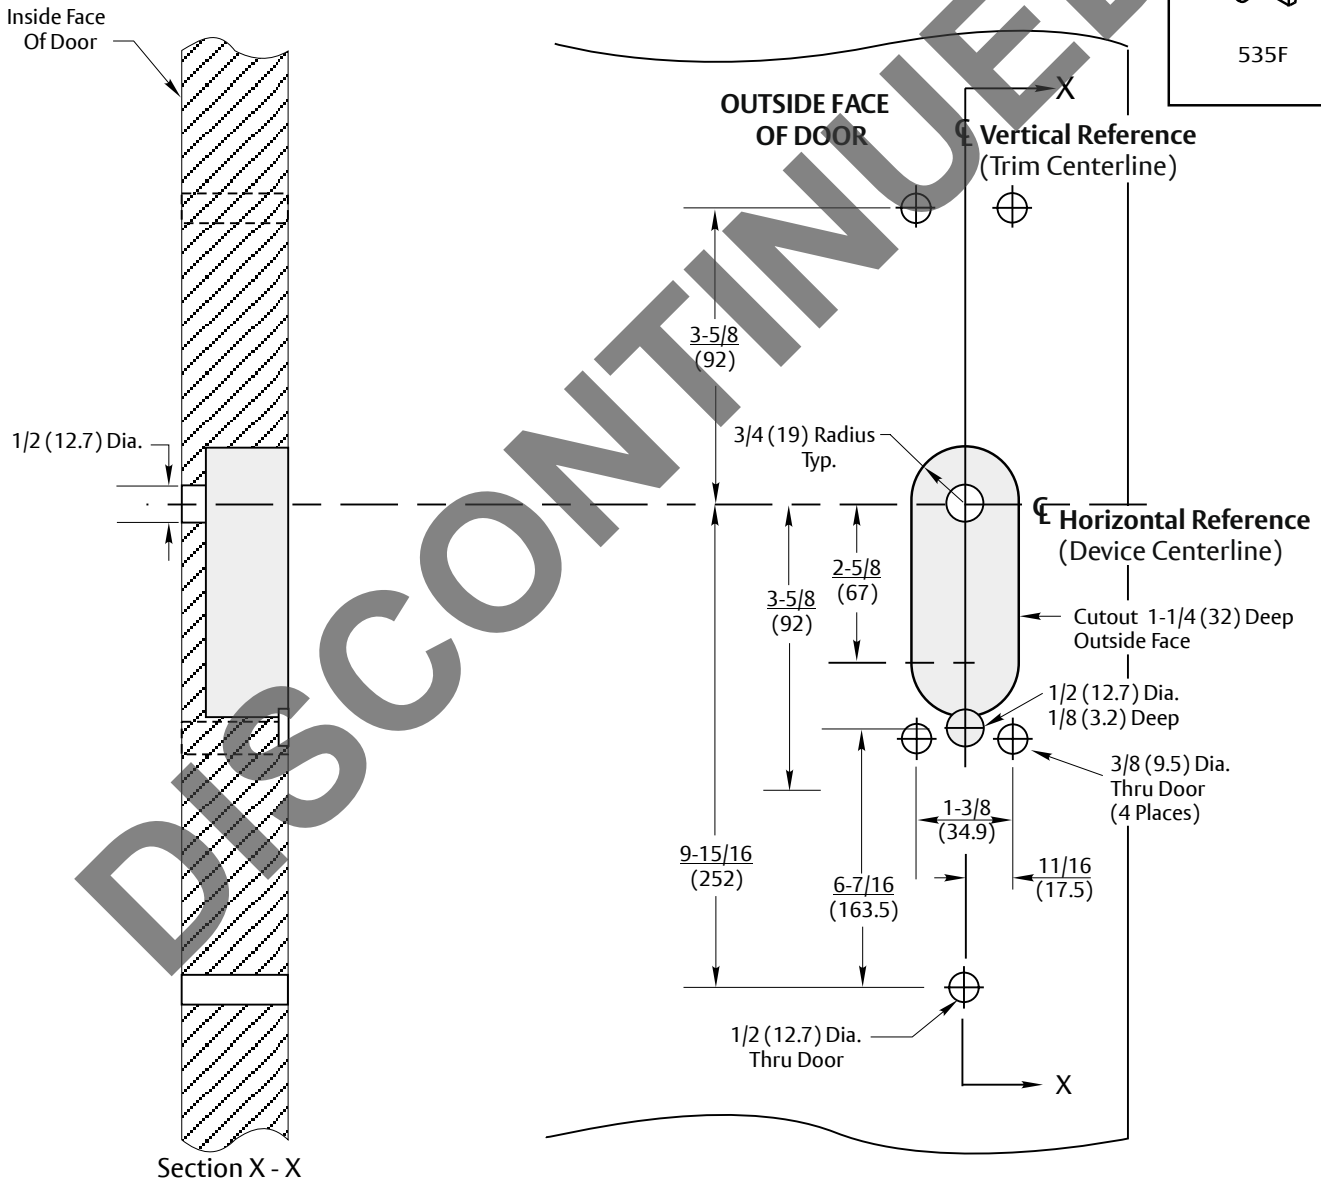

Section X - X

RESPONSIBILITY

DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

535F Trim Application
 With 1500(F), 2100(F) or 7100(F) Series
 Rim and Vertical Rod Exit Devices
 Wood or Composite Door Preparation
Contact us for support at 1-855-557-5078.

ASSA ABLOY

SUPERSEDES	01/02	DO NOT SCALE DRAWING
TEMPLATE NUMBER	7400-1535	DATE 12-23