

## INSTALLATION INSTRUCTIONS FOR PUSH PLATES PS, PN, PT, PD Series

Mount Push Plate to mounting surface with the captive 6-32 screws using the hex key.

### Switch Wiring SPDT/DPDT

Common - White Lead  
 Normally Closed Contact - Red Lead  
 Normally Open Contact - Blue Lead  
 Contacts Rated .5A @125VDC

### Pneumatic Wiring


Normally Closed Contact— Red Lead  
 Normally Open Contact—Blue Lead  
 Contacts Rated 2A @ 12-28VDC

\*Must be powered by a UL  
 294 Listed Power Supply\*


### **Time Adjustment -**

Rotate knob clockwise for maximum time (30 seconds).  
 Rotate knob counter clockwise for minimum time (2 seconds).  
 Note: Switch time repeatability is  $\pm 10\%$ .

Time adjustment knob



### TEMPLATE FOR MULLION CUT-OUT

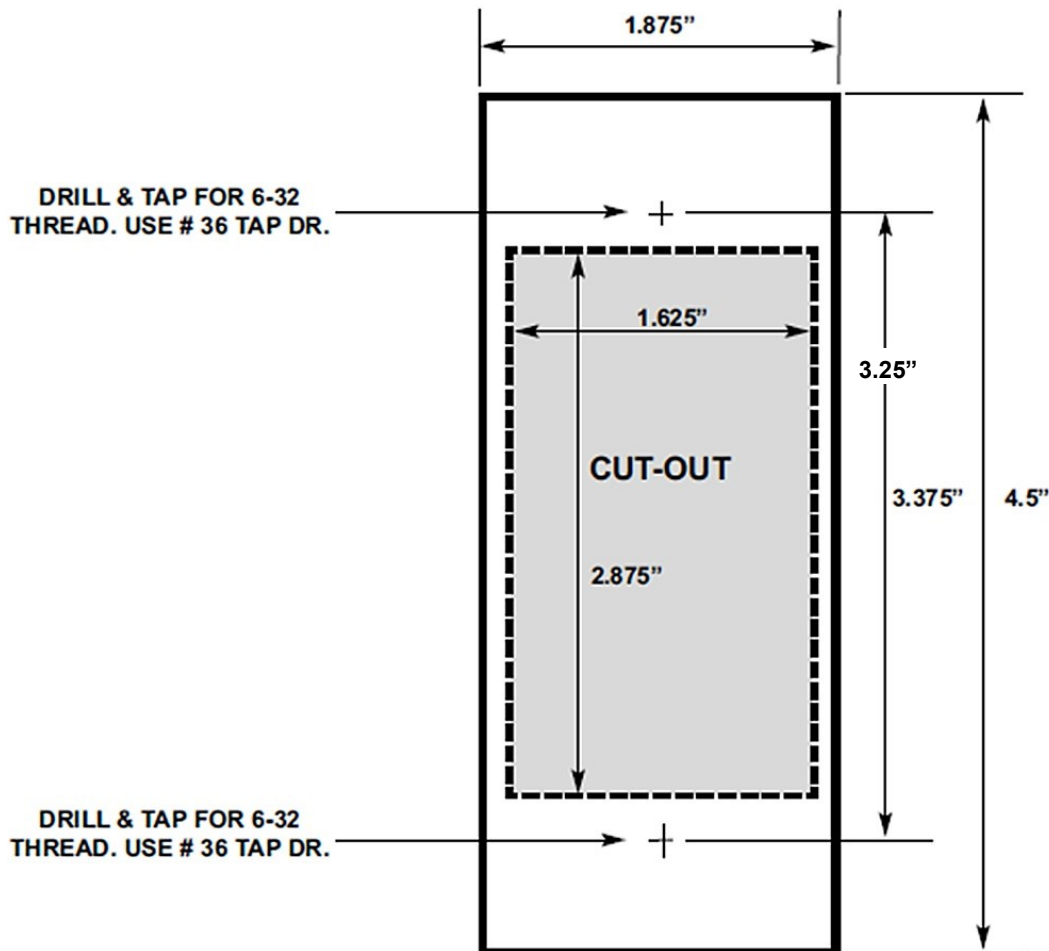

**Alarm Controls**  
 Phoenix AZ, 85044  
 (800) 645-5538  
[www.alarcontrols.com](http://www.alarcontrols.com)



ASSA ABLOY, the global leader  
 in door opening solutions