



**ALARM LOCK**

345 Bayview Avenue  
Amityville, New York 11701  
For Sales and Repairs 1-800-ALA-LOCK  
For Technical Service 1-800-645-9440  
Publicly traded on NASDAQ Symbol: NSSC

© ALARM LOCK 2007

# ADDENDUM NEW KEY LOGGING FEATURE

WI1587 1/07

The new *Key Logging* feature creates an entry in the Audit Log when a conventional key is used for entry. Two sample log entries are shown below, one printed, the other as displayed in DL-Windows. To enable Key Logging, simply connect the wires as shown in the images at the bottom.


```

----- AUDIT LOG -----
01/16/07 13:06:35 Tue
13:01:59 001 PROGRAM 56
13:01:29 001 PROGRAM 57
13:00:53 001 ENTRY
13:00:26 013 ENTRY
13:00:17 KEY ENTRY
13:00:03 012 ENTRY
12:56:27 001 PROGRAM 2
12:56:27 001 PROGRAM 40
12:56:04 001 PROGRAM 39
12:55:00 NEW CLCK TIME
12:01:39 OLD CLCK TIME
12:00:45 RAM TEST:PASS
12:00:45 POWER UP
-----
End of Audit Log

```




Sample log entry printed by the AL-IR1 infrared printer.

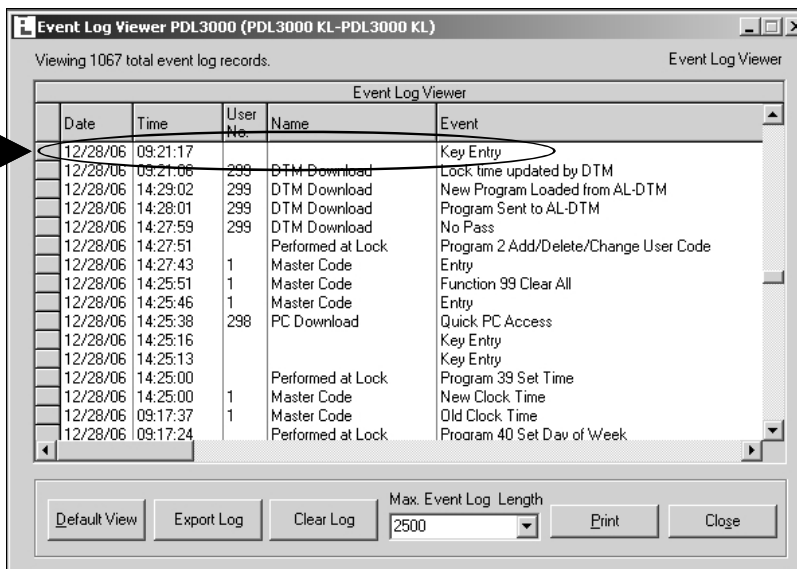

Sample log entry as displayed by DL-Windows (v3.6.0 or later).


## HOW TO ROUTE AND CONNECT THE WIRES

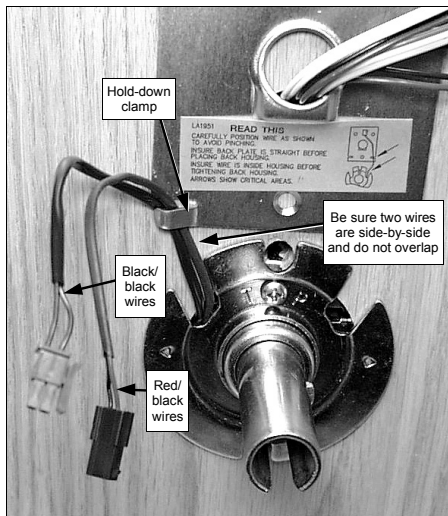

1. Route wires through door as shown. The cylinder housing has two terminal housings, and each housing contains two wires -- one housing contains *red/black* wires, the other *black/black*.



2. After installing the inside housing, be certain wires are not pinched between the housing and the mounting plate.

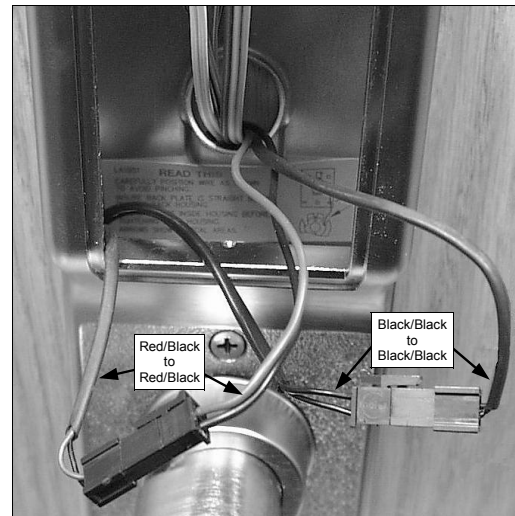

3. Plug in each pair of connectors. Verify that the wire colors in each pair of female and male terminal housings are the same -- *red/black to red/black* and *black/black to black/black*.