

5016N Series Door Closers

Premier Product

The Arrow 5016N Series Surface Applied Door Closers are ideal for use in commercial and institutional facilities where there is a demand for reliability and flexibility. Arrow offers multiple options for compliance with barrier-free codes for interior or exterior doors.

Compliance:

- UL/cUL listed.
- Meets the requirements of UL10C and UBC7.2 (1997) for positive pressure.
- Meets the requirements of ANSI A156.4 and ANSI ICC A117.1. Grade 1
- Meets ADA requirements (Americans with disabilities Act).



Look for the universal symbol next to Arrow products that comply with ADA accessibility requirements.

Sizes (Adjustable):

- 5016N– Adjustable sizes 1 through 6, Standard Arm or Hold Open Arm.

| Interior Door Width | 24" | 30" | 34" | 38" | 48" | 54" | 60" |
|------------------------|---------|---------|---------|---------|----------|----------|----------|
| | (610mm) | (762mm) | (865mm) | (965mm) | (1219mm) | (1372mm) | (1524mm) |
| Regular Arm & Top Jamb | Size 1 | Size 2 | Size 3 | Size 4 | Size 5 | Size 6 | |
| Parallel Arm | Size 2 | Size 3 | Size 4 | Size 5 | Size 6 | | |

| Exterior (& Vestibule) Door Width | 24" | 30" | 36" | 42" | 48" |
|-----------------------------------|---------|---------|---------|----------|----------|
| | (610mm) | (762mm) | (914mm) | (1067mm) | (1219mm) |
| Regular Arm & Top Jamb | Size 3 | Size 4 | Size 5 | Size 6 | |
| Parallel Arm | Size 4 | Size 5 | Size 6 | | |

Features:

- Cast aluminum body.
- Hardened steel rack and pinion.
- High tensile steel springs.
- Staked valves
- Two non-critical adjusting valves (sweep and latch) control closing speed.
- Backcheck intensity valve.
- All temperature fluid.
- Available with a full plastic cover or a slim plastic cover (specify "S" suffix)..
- Non-handed for regular, top jamb and parallel arm mount applications.
- Hold open arm available on adjustable closers.


- Available with optional delayed action adjusted with separate independent valve. Delays door closing to allow unimpeded passage through the opening. Specify "D" suffix
- Supplied with machine screws, fully threaded self-reaming/tapping screws, sleeve nuts and thru-bolts for 1-3/4" thick doors.
- Packaging: one per box and four boxes per carton.
- 10 year limited warranty.

Finishes:


- Aluminum (689), Specify **AL**
- Dark Bronze (690), Specify **DBZ**
- Light Bronze (691), Specify **LBZ**
- Gold (696), Specify **GL**
- Black (693), Specify **BLK**



Regular Arm Installation

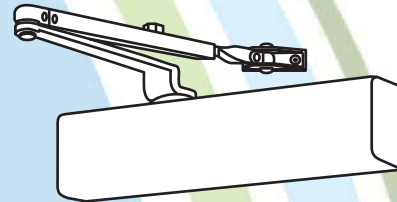

Top Jamb Installation

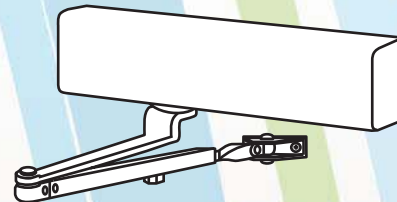

Parallel Arm Installation

