

CL Series Residential Locks

Value Product

The return of the Comet brings with it the exceptional value and quality required to meet the demands of the single and multi-family housing markets, as well as light commercial applications.

Combining a variety of lever designs, convenient installation and the Arrow benchmark for dependability, the CL Series is perfect in most any space.

Certification:

The CL Series has been designed to meet the requirements of ANSI, A156.2, Series 4000, Grade 2.

Features:

Construction – Tubular chassis

Backset – Universal latch is standard. Adjustable for both 2-3/8" (60mm) or 2-3/4" (70mm).


Latch – Brass front. Supplied standard with 1" x 2-1/4" (25mm x 57mm) square corner, 1" x 2-1/4" radius corner and 1-1/8" x 2-1/4" (29mm x 57mm) square corner latch fronts. Available with drive-in latches.

Strike – 1-5/8" x 2-1/4" (41mm x 57mm) full lip strike standard. Available with 1-1/8" x 2-3/4" (29mm x 70mm) "T" strike, or 1-1/4" x 4-7/8" (32mm x 124mm) ANSI strike.

Door Thickness – Fits 1-3/8" to 1-3/4" (35mm-44mm) doors standard.

Exposed Trim – Levers are zinc based and are plated to match finish requirements.

Finishes:

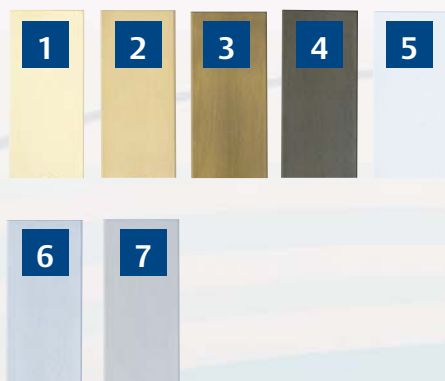


	BMHA	U.S. Equiv	Arrow Equiv	Finish
1	605	US3	03	Bright Brass
2	606	US4	04	Satin Brass
3	609	US5	05A	Satin Brass, Blackened
4	614	US10BL	10BP	Dark Oxide Bronze, Clear Coated
5	625	US26	26	Bright Chromium Plated
6	626	US26D	26D	Satin Chromium Plated
7	619	US15	15	Nickel Plated



ADA/Americans with Disabilities Act:

Acceptable Door Hardware: Section 4.13.9

Handles, pulls, latches and other operating devices on accessible doors shall have a shape that is easy to grasp with one hand and does not require grasping, tight pinching or twisting of the wrist to operate. Lever operated mechanisms, push-type mechanisms and "U" shaped handles are acceptable designs.

 Look for the universal symbol next to Arrow products that comply with ADA accessibility requirements.

Mounting – Leversets are supplied with concealed screws on inside rose.

Cylinder – Standard: Solid brass, 6-pin, pinned 5, 2 brass keys. Options: Arrow A or sectional keyways, Schlage C keyway.

Finishes – US3, US5, US26, US26D, US15.

Packaging – Leversets are packed 1 per box, 20 per carton.

Warranty – 5 year mechanical, 5 year finish.