

# DC300 Series Door Closers

## Value Product

The Arrow DC300 Series surface applied door closers are an economical value for customers requiring convenience and security in an affordable package. They are ideally suited for retail or office buildings.

### Compliance:

- UL/cUL listed.
- UL10C listed for positive pressure to comply with UBC-72 (1997).
- Meets requirements of ANSI A156.4. Grade 1
- Adjustable size closers may be adjusted to meet requirements of ADA and ANSI ICC A117.1.



Look for the universal symbol next to Arrow products that comply with ADA accessibility requirements.

### Sizes (Adjustable/Fixed):

- DC314 – Adjustable sizes 1 through 4.
- DC325 – Adjustable sizes 2 through 5.
- DC304 – Fixed size 4.
- DC305 – Fixed size 5.

#### Interior Door Width

|                        | 24"<br>(610mm) | 30"<br>(762mm) | 34"<br>(865mm) | 38"<br>(965mm) | 48"<br>(1219mm) | 54"<br>(1372mm) |
|------------------------|----------------|----------------|----------------|----------------|-----------------|-----------------|
| Regular Arm & Top Jamb | Size 1         | Size 2         | Size 3         | Size 4         | Size 5          |                 |
| Parallel Arm           | Size 2         | Size 3         | Size 4         | Size 5         |                 |                 |

#### Exterior (& Vestibule) Door Width

|                        | 24"<br>(610mm) | 30"<br>(762mm) | 36"<br>(914mm) | 42"<br>(1067mm) |
|------------------------|----------------|----------------|----------------|-----------------|
| Regular Arm & Top Jamb | Size 3         | Size 4         | Size 5         |                 |
| Parallel Arm           | Size 4         | Size 5         |                |                 |

### Features:

- Cast aluminum body.
- Hardened steel rack and pinion.
- High tensile steel springs.
- Staked valves
- Two non-critical adjusting valves (sweep and latch) control closing speed.
- Backcheck intensity valve.
- All temperature fluid.
- Full plastic cover available (sold separately).
- Non-handed for regular, top jamb and parallel arm mount applications.


- Hold open arm available on adjustable closers – Specify: DC3xx-1.
- Supplied with fully threaded wood screws, machine screws and thru-bolts for 1-3/4" thick doors.
- Packaging: one per box and six boxes per carton.
- 10 year limited warranty.

### Finishes:


- Aluminum (689), Specify AL
- Dark Bronze (690), Specify DBZ



### Regular Arm Installation

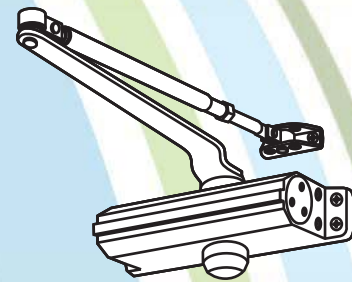

### Top Jamb Installation

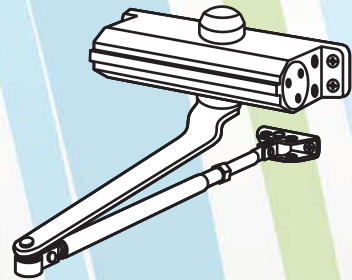

### Parallel Arm Installation

