


DO NOT SCALE

PLASTER GUARD
BY FRAME MFR.

LOCK	HOLES IN DOOR	
	OUTSIDE	INSIDE
N40	NONE	THUMBTURN
N41	CYLINDER	THUMBTURN
N42	CYLINDER	CYLINDER
N43	CYLINDER	NONE
N44	CYLINDER	THUMBTURN

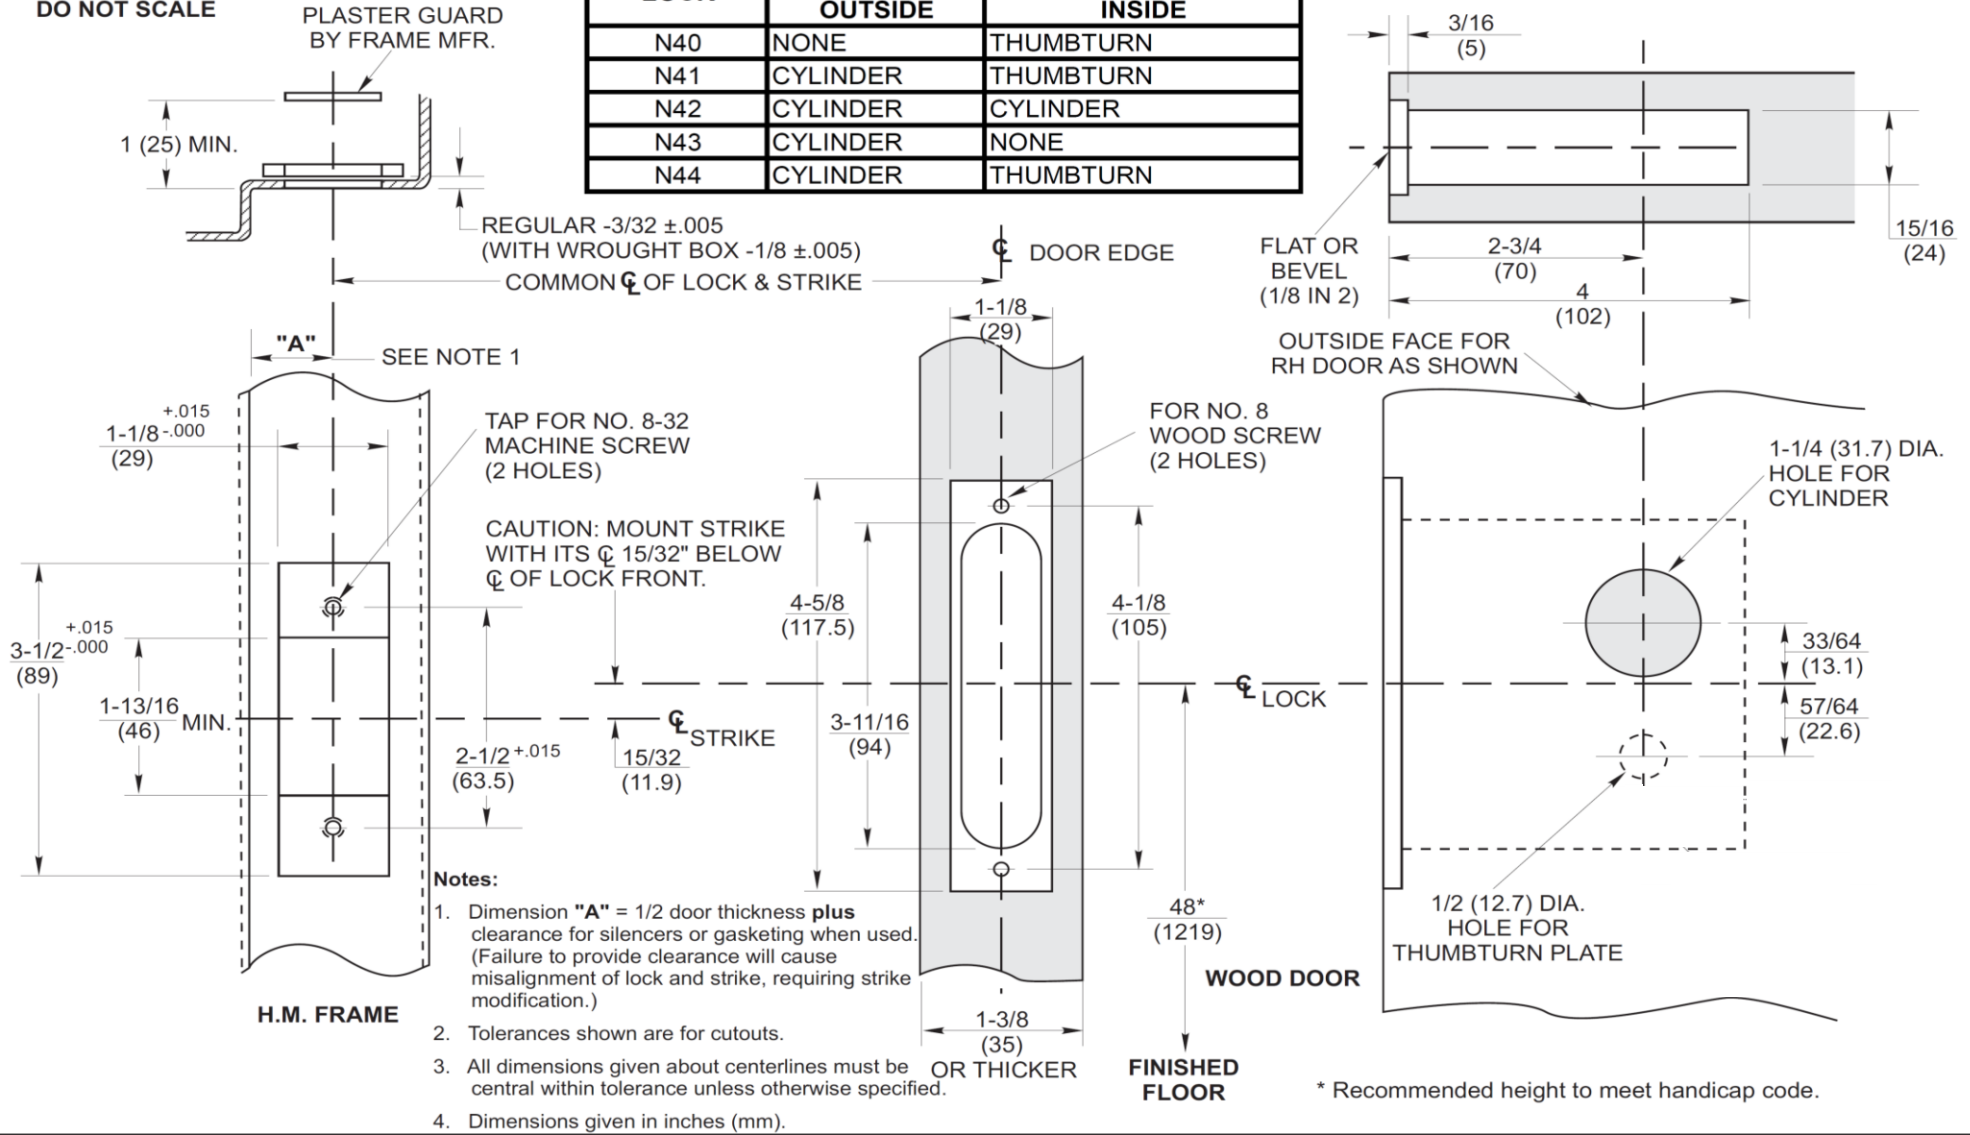

ARROW Lock and Door Hardware

3626 Allegheny Dr

Salem, VA 24153

1-800-839-3157


N SERIES LOCK - WOOD DOOR TEMPLATE

ASSA ABLOY

REV. & DATE	TEMPLATE NO.
C - 11-16	1127A

DO NOT SCALE

LOCK	HOLES IN DOOR	
	OUTSIDE	INSIDE
N40	NONE	THUMBTURN
N41	CYLINDER	THUMBTURN
N42	CYLINDER	CYLINDER
N43	CYLINDER	NONE
N44	CYLINDER	THUMBTURN

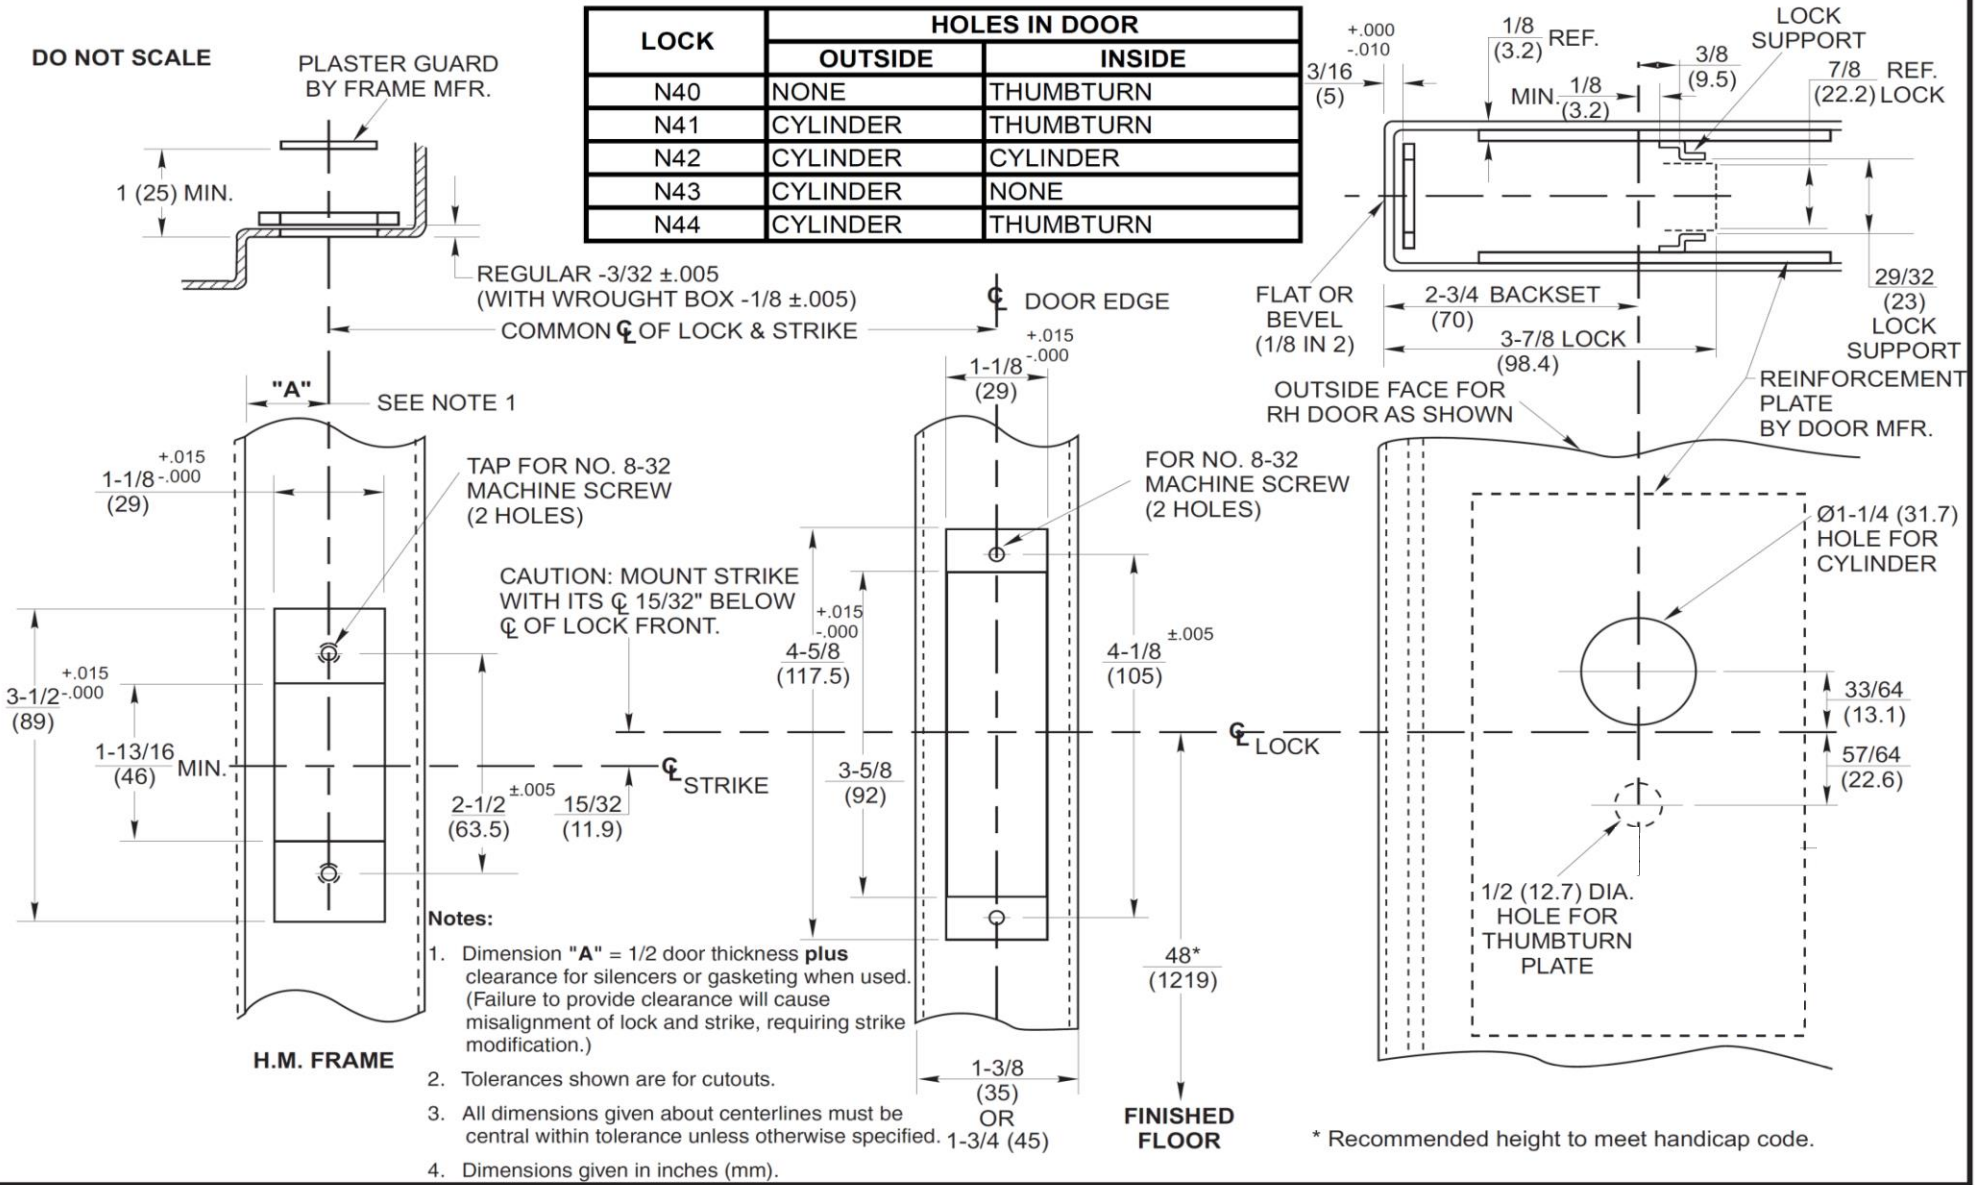

- Notes:**
1. Dimension "A" = 1/2 door thickness **plus** clearance for silencers or gasketing when used. (Failure to provide clearance will cause misalignment of lock and strike, requiring strike modification.)
 2. Tolerances shown are for cutouts.
 3. All dimensions given about centerlines must be central within tolerance unless otherwise specified. 1-3/4 (45)
 4. Dimensions given in inches (mm).

* Recommended height to meet handicap code.



ARROW Lock and Door Hardware
 3626 Allegheny Dr
 Salem, VA 24153
 1-800-839-3157

N SERIES LOCK - METAL DOOR TEMPLATE

ASSA ABLOY

REV. & DATE	TEMPLATE NO.
C - 11-16	1127A