



# Wi-Q™

## Wireless Access Management



BEST: Setting the Standard for Security

# TABLE OF CONTENTS

Introduction .....	2	Cylindrical lock & features.....	7
Software .....	2	Accessories .....	7
Wireless intelligent option diagram.....	3	Exit trim & feature.....	8
Locking hardware features.....	3	Exit compatibility chart.....	8
Wireless portal gateway – standard door .....	4	Reader types .....	9
Wireless access controller & features .....	4	Components.....	10
Outdoor Bi Directional/parking gate.....	5	How to order.....	10 -11
Mortise lock & features .....	6		

## Introduction

The BEST Wi-Q™ Wireless Technology is a smart, fast, efficient wireless access control solution that will change the way you look at wireless access control. The system's 128 bit AES security encryption and ultra-smart power consumption provide unsurpassed access control benefits with lower installation costs. Multiple redundancy of the access control data at the reader, gateway and host computer means the system makes the access control decision at the door when the card is presented. BEST also built this advanced technology into its existing line of access control solutions so one application can now control the BEST® offline, wireless and online access control doors, CCTV and ID Badging.

The BEST Wi-Q Wireless Technology utilizes the proven heavy duty BEST electronic locksets which include our 9KQ, 45HQ and EXQ products. We didn't want to stop there, so we included online features such as a door position switch, request-to-exit sensor, a latch switch sensor and even a key override sensor as standard in our mortise lineup. In addition to these on the door applications, we also offer our Wireless Access Controller (WAC) module that provides wireless control for parking gates, turnstiles, electromagnetic locks, electric strikes and many other electronic devices.

The BEST Wi-Q Technology Wireless Access Solution brings intelligent power to your access control needs. Its overall design gives you upgrade ability and scalability to go from very small secure solutions to extremely large solutions. If you have been waiting for uncompromising wireless intelligence to show up at your door, BEST Wi-Q Wireless Technology has arrived.

**Products protected by one or more of the following patents** – 5,590,555 5,794,472 5,083,122 6,720,861  
Other products patent pending.

## Wi-Q – Software

Description	Part Number
BEST Wi-Q Access Management Software	WQS-SWAT

Note:

- Wi-Q systems offer capacity for up to 64 readers per portal gateway and up to 14,000 credentials per reader. Total number of readers and users that can be supported in a system depends on several factors - please contact your BEST representative for more detail.

## BEST Wi-Q Technology Wireless Access Management System – The Intelligent Option

### Standard Hardwired System


- Install electrified locking device
- Install external card reader
- Install external door position switch
- Install request to exit device(s)
- Install door control module
- Terminate all door connections
- Run wire from door control module to head-end controller

Installation approximately 6-8 hours

### BEST® Wireless

- Includes electronic locking device
- Includes card reader
- Includes door position switch
- Includes request to exit device
- Includes door control module
- No wiring or terminations needed
- Connects wirelessly to remote
- Portal Gateway


Installation approximately 1-2 hours

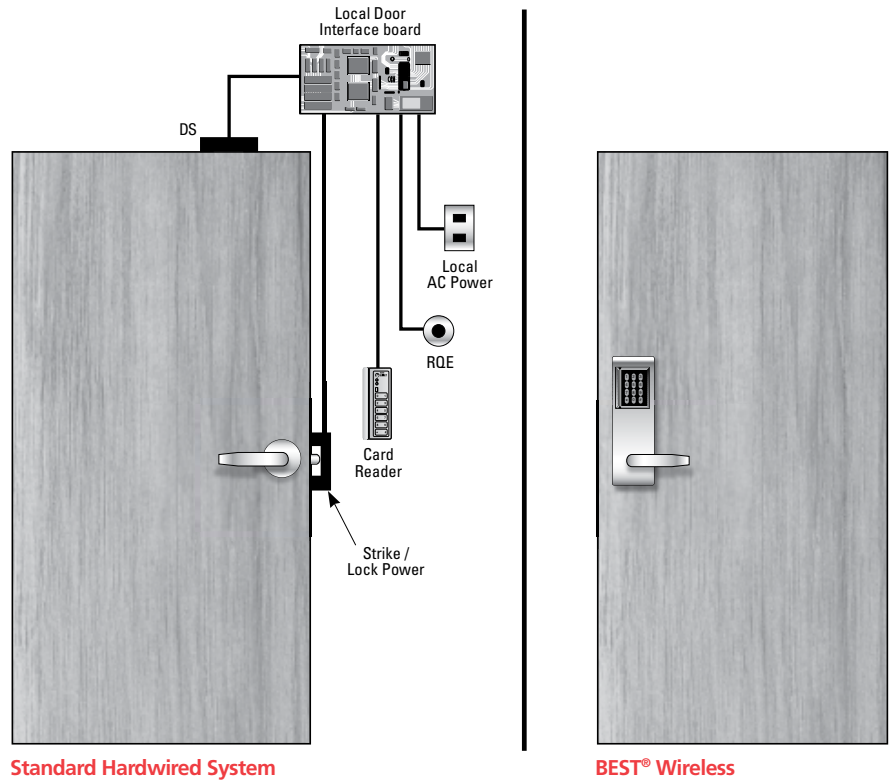

## Locking Hardware – Features

- Dynamic memory up to 14,000 credentials per reader
- Each reader has its own unique MAC address
- Battery-powered by 'AA' battery case (battery pack optional)
- All intelligence is at the door, NOT at a controller
- Standard Integrated Door Switch (DS), Latch Switch (LS), Request-to-Exit (RQE), Deadbolt Override (DB) and Key Override Sensor (KOS) on BEST® mortise chassis
- Standard Integrated DS, and RQE on BEST® cylindrical chassis.
- Standard Integrated DS, LS, RQE on EX chassis with the Precision™ exit device line.
- Approximately 8.7K-Event audit trail stored dynamically at reader
- 512 time zone user groups per reader with 6 intervals each
- 256 holidays
- ADA compliant locksets
- Available in cylindrical, mortise, exit device, and wireless access controller configurations
- Magnetic stripe/PIN Dual-validation, HID, iClass and Indala proximity reader technology
- Two processors for efficient and reliable transfers of data and firmware updates
- Remote reader diagnostics from PC (battery level and signal strength of each lock)

## Wireless Portal Gateway – Standard Door

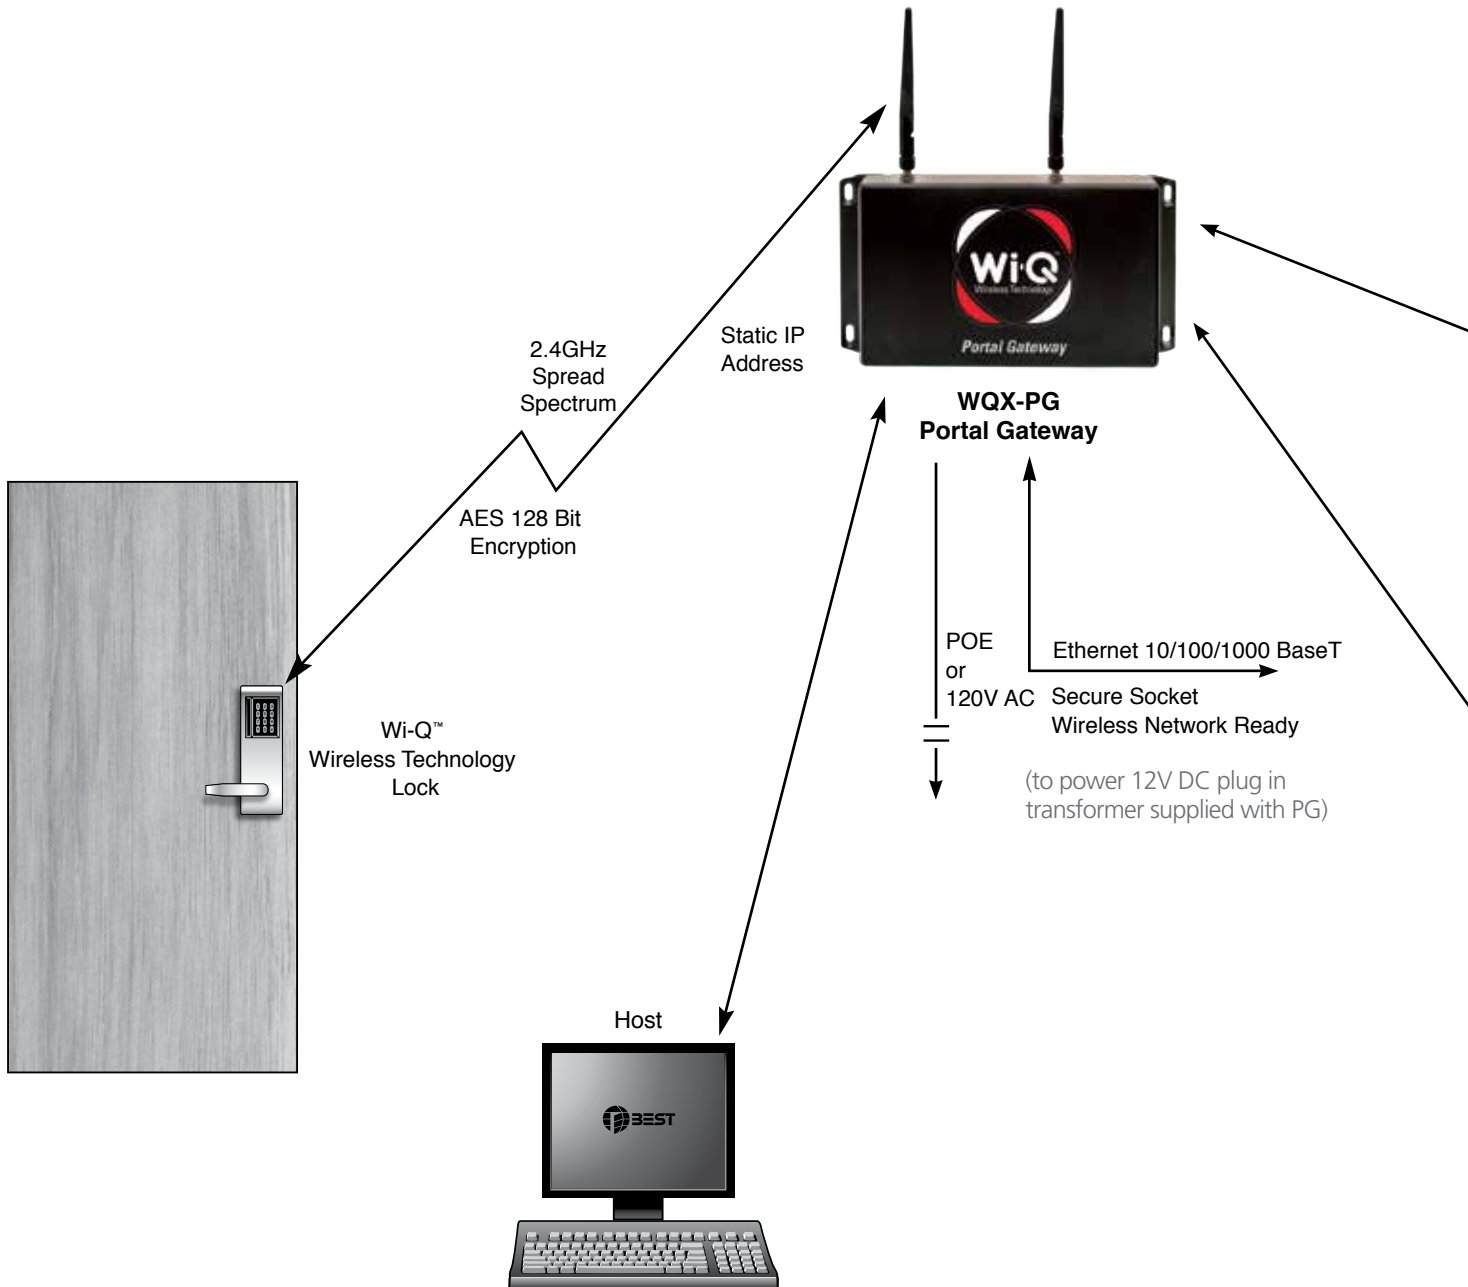


## Wireless Portal Gateway – Features

- Communicates at 2.4GHz spread spectrum to wireless readers or wireless access controllers
- Uses 802.15.4 protocol with clear channels above 802.11 to allow Wi-Fi interoperability
- 10/100/1000 Base-T bit Ethernet
- Provides redundant communication (locks attached to the strongest signal)\*
- Non-dedicated portal can communicate with 1 to 64 readers (Does not imply that 64 readers/locks will be within distance of RF range to connect. Total number of portal gateways required is based on individual system survey and requirements.)
- Does not require typical controller hardwiring, simply plug the Portal Gateway into an existing TCP/IP network and provide local power.
- POE available on certain models

\*Wi-Q™ AMS only feature and not available in B.A.S.I.S.®

## Wireless Access Controller


Wireless Access Controller (WAC) for turnstiles, parking gate arms, store front entry doors and existing hard-wired card access doors in retrofit applications.

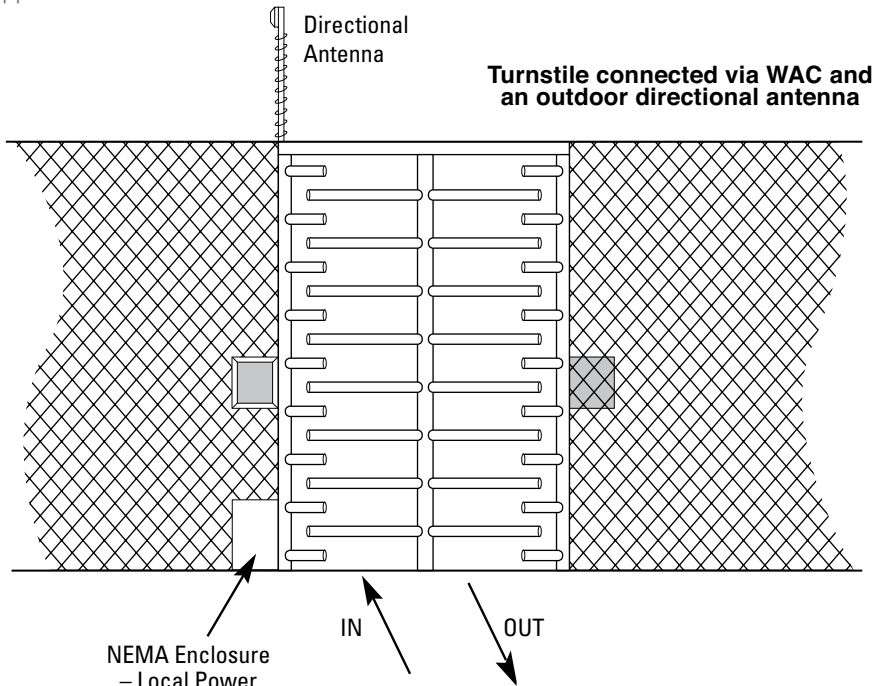

WQX-WAC  
Wireless Access Controller

## Wireless Access Controller – Features

- Provides wireless control of electric locks on glass/aluminum doors
- Provides relay control for various locking devices
- Recommended for exterior door applications
- Existing wired system can be converted to wireless technology
- 2 output relays (Form-C) control external devices (alarms, electrified hardware, etc.)
- Monitors door latch, door status and request-to-exit
- Facilitates ADA compliance to control auto open type doors
- Provide control for local door alarm/sounders for door held open events

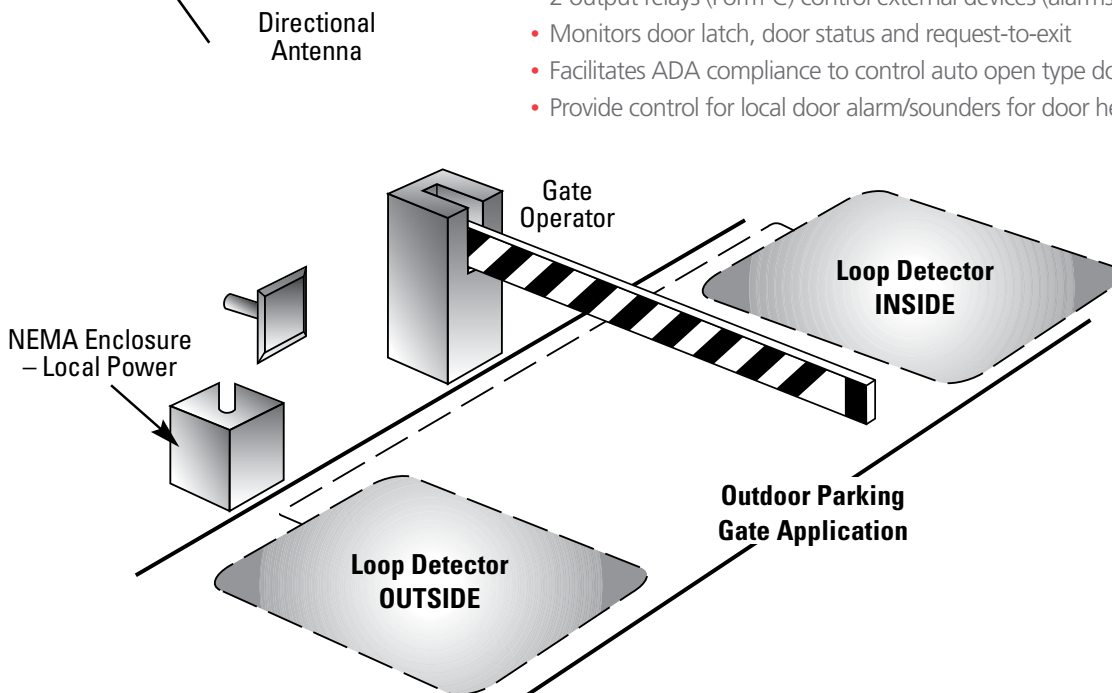

# Mortise Lock

**Case** – 0.095" cold rolled steel, 5 7/8" (149mm) H x 7/8" (22mm) D x 4 1/16" (149mm) W. Steel is zinc dichromate plated for corrosion protection.

**Faceplate** – Brass or bronze material, 8" (203mm) H x 1 1/4" (31mm) W x 1/16" (1mm) T. Lock face automatically adjusts to proper level during installation.

**Strike** – Brass, bronze, or stainless steel base material, 4 7/8" (124mm) H x 1 1/4" (31mm) W x 3/32" (2mm) T. Fits standard door frame cut-out as specified in ANSI A115.1. Universal (non-handed) strike supplied standard with lock.

**Backset** – 2 3/4" (69mm)

**Door thickness** – Standard lock configuration designed for doors 1 3/4" thick. Thick door configuration available for door to 3" thick (specify thickness when ordering).

**Latchbolt** – Solid stainless steel, 3/4" (19mm) throw. Latch is oil-impregnated for anti-friction operation. Reversible without opening case.

**Deadbolt** – Stainless steel, 1" (25mm) throw.

**Auxiliary bolt** – Stainless steel, non-handed.

**Lever handle** – Brass, bronze, or stainless steel base material. Lever styles 3, 14, and 15 return to a minimum of 1/2" (12mm) of door surface. Levers 12, 16, and 17 do not return.

**Escutcheons** – 10 1/2" (267mm) H x 3 5/16" (84mm) W x 1" (25mm) D (1" (25mm) at the top, sloping down to 3/4" (19mm) at the bottom)

**Finishes** –

- 605 – bright brass, clear coated
- 606 – satin brass, clear coated
- 611 – bright bronze, clear coated
- 612 – satin bronze, clear coated
- 613\* – oxidized satin bronze, oil rubbed
- 625 – bright chromium plated
- 626 – satin chromium plated
- 629 – bright stainless steel
- 630 – satin stainless steel
- 690\*\* – dark bronze powder coated

**Antimicrobial Finishes** –

- 626AM – Satin Chrome Plated with UltraShield Antimicrobial coating
- 630AM – Satin Stainless Steel with UltraShield Antimicrobial coating

\* 613 finish is designed to wear over time, providing an "antique" appearance.

\*\* 690 finish will continue as a dark brown appearance over time.

**ADA-Americans With Disabilities Act** – The design and operation of the mortise lock meets the intent of the standard for ANSI A117.1 section 404.2.6.

**Builders Hardware Manufacturers Association** – ANSI A156.13, Series 1000, Grade 1 Operational, Strength, and Security. To meet Grade 1 Security, drill resistant cores

**Underwriters Laboratories®** – The 40H series is listed by Underwriters Laboratories for use on a 3 hour A label doors. These locks also carry the C-UL mark which is officially accepted in all of Canada, indicating compliance with appropriate Canadian standards and codes.



**UltraShield™** – The UltraShield protection is limited to the product's surface and is not meant to be a substitute for good hygiene. BEST recommends instituting and maintaining a thorough cleaning regimen of all your door hardware.



45HQ Proximity Reader



## Mortise Lock – Functions

TV Deadbolt with key override	<p><b>Latchbolt operated by:</b></p> <ul style="list-style-type: none"> <li>• Outside key</li> <li>• Outside lever - unless locked by internal motor drive mechanism</li> <li>• Inside lever</li> </ul> <p><b>Latchbolt deadlocked by:</b></p> <ul style="list-style-type: none"> <li>• Auxiliary latch</li> </ul> <p><b>Deadbolt operated by:</b></p> <ul style="list-style-type: none"> <li>• Outside key</li> <li>• Inside turn knob</li> <li>• Outside lever when lever is unlocked by internal motor drive mechanism (retracts only)</li> <li>• Inside lever (retracts only)</li> </ul> <p><b>Outside lever locked and unlocked by:</b></p> <ul style="list-style-type: none"> <li>• Internal motor drive mechanism operated by time-activated electronic signal or by valid card/PIN</li> </ul> <p><b>Inside lever is always unlocked</b></p>	<p><b>DV Latchbolt with key override</b></p> 	<p><b>Latchbolt operated by:</b></p> <ul style="list-style-type: none"> <li>• Outside key</li> <li>• Outside lever - unless locked by internal motor drive mechanism</li> <li>• Inside lever</li> </ul> <p><b>Latchbolt deadlocked by:</b></p> <ul style="list-style-type: none"> <li>• Auxiliary latch</li> </ul> <p><b>Outside lever locked and unlocked by:</b></p> <ul style="list-style-type: none"> <li>• Internal motor drive mechanism operated by time-activated electronic signal or by valid card/PIN</li> </ul> <p><b>Inside lever is always unlocked</b></p>
			

## Cylindrical Lock

**Materials** – Internal parts are brass, zinc, or corrosion-treated steel.

**Chassis:** 2 1/16" (52mm) diameter to fit 2 1/8" (53mm) diameter hole in door.

**Strike** – Brass, bronze, or stainless steel base material; STK 2 3/4" (69mm) H standard, STK3 4 7/8" (123mm) H. Fits standard door frame cut out as specified in ANSI A115.1. Strike box supplied as standard.

**Backset** – 2 3/4" (69mm) standard, 3 3/4" (95mm) and 5" (127mm) available.

**Door thickness** – Standard lock configuration designed for doors 1 3/4" (44mm) – 2 1/4" (57mm) thick.

**Core housing** – 7-pin core.

**Latchbolt** – 9/16" (24mm)

**Lever handle** – Manufactured from high quality zinc alloy, coated to match specified finish. Body is approximately 1 5/8" (41mm) in diameter; handle is approximately 4 3/4" (120mm) in length (from center of chassis). Lever styles 14 and 15 return to a minimum of 1/2" (12mm) of door surface. Lever 16 does not return.

**Escutcheons** – 10 1/2" (267mm) H x 3 5/16" (84mm) W x 1" (25mm) D (1" (25mm) at the top, sloping down to 3/4" (19mm) at the bottom).

**Finishes** –

- 605 – bright brass, clear coated
- 606 – satin brass, clear coated
- 612 – satin bronze, clear coated
- 625 – bright chromium plated (brass base material)
- 626 – satin chromium plated (brass base material)
- 690\*\* – dark bronze coated (brass base material)

**Antimicrobial finishes** –

- 626AM – Satin Chrome Plated with UltraShield™ Antimicrobial coating
- 630AM – Satin Stainless Steel with UltraShield™ Antimicrobial coating

\*\* 690 finish will continue as a dark brown appearance over time.

See page 6 for certification descriptions.



9KQ Dual Validation Reader



## Cylindrical Lock – Function

<p><b>DV Latchbolt with key override</b></p>	<p><b>Latchbolt operated by:</b></p> <ul style="list-style-type: none"> <li>• Outside key</li> <li>• Outside lever - unless locked by internal motor drive mechanism</li> <li>• Inside lever</li> </ul> <p><b>Outside lever locked by:</b></p> <ul style="list-style-type: none"> <li>• Internal motor drive mechanism operated by time-activated electronic signal or by valid card/PIN</li> </ul> <p><b>Latchbolt is deadlocked</b></p>	<p><b>Outside lever unlocked by:</b></p> <ul style="list-style-type: none"> <li>• Internal motor drive mechanism operated by time-activated electronic signal or by valid card/PIN</li> </ul> <p><b>Inside lever is always unlocked</b></p>
--	---	---

## Accessories



NTD360120WBK  
Magnetic Card  
Access Reader



NTD310120WBK  
Dual Validation  
Reader



HD-5365EGP00  
HID Proximity  
Reader



WQD-12928-001  
POE Splitter  
with Ferrite



WQD-12929-001  
POE Injector

## Exit Trim

**Materials** – Internal parts are brass, zinc, or corrosion-treated steel.

**Escutcheons** – 10 5/8" (295mm) H x 3 5/16" (84mm) W x 1" (25mm) D. (1" (25mm) at the top, sloping down to 3/4" (19mm) at the bottom)

**Door thickness** – Standard lock configuration designed for doors 1 3/4" (44mm) – 2 1/4" (57mm) thick.

**Lever handle** – Brass, bronze, or stainless steel base material. Lever styles 14 and 15 return to a minimum of 1/2" (12mm) of door surface.

**Finishes** –

- 606 – satin brass, clear coated
- 613\* – oxidized satin bronze, oil rubbed
- 626 – satin chromium plated (brass base material)
- 690\*\* – dark bronze coated (brass base material)

**Antimicrobial finishes** –

- 626AM – Satin Chrome Plated with UltraShield™ Antimicrobial coating
- 630AM – Satin Stainless Steel with UltraShield™ Antimicrobial coating

\* 613 finish is designed to wear over time, providing an "antique" appearance.

\*\* 690 finish will continue as a dark brown appearance over time.

Exterior trim assembly compatible to exit hardware from Precision™, Von Duprin™, or Sargent™ 8000 rim device.

- Provides online lock capabilities for applications where building code requires exit hardware
- Exit trim comes standard with Door Position Switch (DS). It also comes with lead wires to connect to an optional Request-to-Exit (RQE) switch and an optional latch position switch available with the Precision line of exit devices.
- Request-to-Exit (RQE) & Latch Position Switch (LS) not available on Precision mortise
- The actual Request-to-Exit (RQE) & Latch Position Switch (LS) are never included with the EXQ trim. Those switches must be purchased separately.
- All EXQ trim must be installed by a Best Certified Technician or warranty will be voided
- Exit hardware sold separately

See page 6 for certification descriptions.



EXQ Magnetic Stripe Reader



## Exit Trim – Functions

<b>EV with key override</b>	<p><b>Latchbolt operated by:</b></p> <ul style="list-style-type: none"> <li>• Outside key</li> <li>• Outside lever-unless locked by internal motor drive mechanism</li> <li>• Touchbar</li> </ul> <p><b>Outside lever locked by:</b></p> <ul style="list-style-type: none"> <li>• Internal motor drive mechanism operated by time-activated electronic signal</li> </ul> <p><b>Outside lever unlocked by:</b></p> <ul style="list-style-type: none"> <li>• Internal motor drive mechanism operated by time-activated electronic signal or by valid card/PIN</li> </ul> <p><b>Inside hardware is always unlocked</b></p>
-----------------------------	---

## Exit Trim – Compatibility Chart

Device Type	Precision 2000	Von Duprin 98/99	Sargent 8800
Rim – w/o key override	2103	98TP, 99TP, 98L, 99L	8828, 8863, 8866
Surface Vertical Rod – w/o key override	2203	9827TP, 9947TP, 9827L, 9927L	N/A
Concealed Vertical Rod – w/o key override	2703	9847TP, 9847L, 9947L	N/A
Rim – with key override	2103	98TP, 99TP, 98L, 99L	N/A
Surface Vertical Rod – with key override	2203	9827TP, 9947TP, 9827L, 9927L	N/A
Concealed Vertical Rod – with key override	2703	9847TP, 9947TP, 9847L, 9947L	N/A



## Locking Hardware Types And Technologies

### The BEST Wi-Q™ Access Control Solutions supports:

- BEST® Mortise locks
- Precision™ Exit devices
- BEST Cylindrical locks
- BEST Wireless Access Controller platforms

### Lock reader types supports:

- Magnetic stripe
- Indala® proximity
- HID® proximity 125KHz
- Dual validation (magnetic stripe plus keypad)
- HID® iClass

## Door Hardware Integrated

**Sealing** – Weatherproof lens and gasket provides protection for outdoor use (usable in most environmental/ exterior applications).

**FCC Compliance** – Compliant with US, Canadian, and European EMC requirements, and for FCC Class A digital apparatus interference.

## Magnetic Stripe – Reader

### Magnetic Stripe Reader:

**Bezel Size** –

2 5/8" (66mm) x 3 1/4" (82mm)

**Bezel Material** – High impact ABS.

**ESD Protection** – 15 kilovolts

**Read Rate** – 5 inches per second to 50 inches per second.

**Card Thickness** – ISO standard .030" ± .003 thick.

**Operating Temperature** –

-40°F to 167°F (-40°C to 75°C.)

**Relative Humidity** – 100%.

**Primary Power** – Battery pack.

**User Feedback Indicators** – Visual and audible.



9KQ, 45HQ, EXQ  
Magnetic Stripe Reader

## Proximity – Reader

### Proximity Reader:

**Bezel Size** –

2 5/8" (66mm) x 3 1/4" (82mm)

**Bezel Material** – High impact ABS.

**ESD Protection** – 15 kilovolts.

**Operating Temperature** – -31°F to 149°F (-30°C to 65°C.)

**Relative Humidity** – 0-95%.

**Primary Power** – Battery pack.

**User Feedback Indicators** – Visual and audible.

Note: Can be used in direct sunlight.



9KQ, 45HQ, EXQ  
HID 125 kHz or iClass  
Proximity Reader or  
Indala Proximity Reader

## Dual Validation – Reader

### Dual Validation Reader:

**Bezel Size** –

2 13/16" (71mm) x 3 1/2" (89mm)

**Bezel Material** – High impact ABS.

**Keypad Material** – Encapsulated elastomer.

**ESD Protection** – 15 kilovolts.

**Keypad Button Operating Life** – 1 million cycles.

**Operating Temperature** –

-31°F to +151°F (-35°C to +66°C).

**Primary Power** – Battery pack.

**User Feedback Indicators** – Visual and audible.



9KQ, 45HQ, EXQ  
Dual Validation

# BEST Wi-Q™ Components

Portal Gateways (PG):	Part #
Portal Gateway for up to 64 Readers/Locks* with half wave dipole omnidirectional antenna (should only be used where PG is mounted in an open area (not in a ceiling or restricted signal area)	WQX-PG
Portal Gateway for up to 64 Readers/Locks* with ceiling mount omnidirectional antenna	WQX-PGC
Portal Gateway with enclosure, power supply and ceiling mount omnidirectional antenna	WQX-PG-C-B
Portal Gateway for up to 64 Readers/Locks* with wall mount directional antenna	WQX-PG-W-B
Portal Gateway with enclosure, power supply, and outdoor mast mount directional antenna	WQX-PG-D-B
Portal Gateway with enclosure, power supply, and outdoor mast mount omnidirectional antenna	WQX-PG-O-B
* Does not imply that 64 readers/locks will be within distance/RF range to connect. Total number of portal gates is based on individual system survey and requirements	
Wireless Access Controllers (WAC):	Part #
Wireless Access Controller (WAC) with half wave dipole omnidirectional antenna (should only be used where WAC is mounted in an open area (not in a ceiling or restricted signal area)	WQX-WAC
Wireless Access Controller with ceiling mount omnidirectional antenna	WQX-WAC-C
Wireless Access Controller in enclosure with power supply and ceiling mount Omni-directional antenna	WQX-WAC-C-B
Wireless Access Controller with wall mount directional antenna	WQX-WAC-W
Wireless Access Controller in enclosure with power supply and wall mount directional antenna	WQX-WAC-W-B
Wireless Access Controller in Nema enclosure with power supply and exterior directional antenna	WQX-WAC-D-BW
Wireless Access Controller in Nema enclosure with power supply and exterior amnia directional antenna	WQX-WAC-O-BW
Power and adapters:	Part #
Plug in Transformer (wall-mount) with 6' of cable	WQD-12827
Power over Ethernet Power Supply/Insertor	WQD-12927-001
Power over Ethernet Active Splitter with Isolation	WQD-12928-001
Wi-Q™ Antennas	Part #
2.4 GHz Interior Ceiling Mount Omnidirectional Antenna Kit*	WQD-ACMO
2.4 GHz Interior Wall mount directional antenna Kit*	WQD-AWMD
2.4GHZ Exterior directional antenna***	WQD-AEMD
2.4GHZ Exterior omnidirectional mast mount	WQD-AEMO
Exterior Antenna Grounding Kit***	WQD-AGT
Surge Protection Kit	WQD-SURG

\* Antenna Kit includes: antenna, standard mount and 20' cable to connect to PG or WAC

\*\* Antenna Kit includes: antenna, wall and post mounts and 20' cable to connect to WAC or PG

\*\*\* Grounding Kit includes: coax grounding kit and lightning arrestor




## How to Order Mortise Locks

45HQ	7	TV	15	MS	626	RH	
Series	Core Housing	Function Code	Lever/Knob Style	Trim Style	Finish	Door Hand	Options
45HQ – mortise	0 – keyless 7 – 7 pin IC housing accepts all BEST cores	DV – Latch w/ key TV – Deadbolt w/key LV – Deadbolt w/o key NV – Latch w/o key	3** – solid tube with return & 4 – round knob 12 – solid tube/ no return & 14 – curved return & 15 – contour angle return & 16 – contour angle/ no return & 17 – gull wing/ no return &	MS – magstripe DV – dual validation (magstripe & keypad) PH – HID® proximity SC – HID® iClass® PM – Indala® proximity DVA – other cyl. MSA – other cyl. PHA – other cyl. PMA – other cyl.	626 630 690 Satin* 606 612 613 Bright* 605 611 625 629	RH RHRB LH LHRB	8CE* – extended life battery pack KOS* – key override sensor SH* – security head screws Thick door* – specify thickness TAC* – Tactile lever 7/8" LTC – Flat lip strike 4SW - Shrink wrap battery

DV Function: Wireless locks come with Integrated Door Hardware (IDH) as standard -Request-to-Exit (RQE), Door Position Switch (DS), Latch bolt monitor switch (LS) and Key Override Switch (KOS).

TV Function: Wireless locks come with Integrated Door Hardware (IDH) as standard -Request-to-Exit (RQE), Door Position Switch (DS), Deadbolt monitor switch (DBS) and Key Override Switch (KOS). \* Indicates extra cost option. \*\* Indicates cost deduction.

## How to Order Cylindrical Locks

9KQ3	7	DV	15	MS	STK	626	
Series Backset	Core Housing	Function Code	Lever Style	Trim Style	Strike Package	Finish	Options
9KQ3 – 2-3/4" (69mm) 9KQ4* – 3-3/4" (95mm) 9KQ5* – 5" (127mm) wireless	0 – keyless 6 – 6 pin non-IC cylinder 7 – 7 pin IC housing accepts all BEST cores	DV – with key override	14 – curved return  15 – contour angle return  16 – curved without return 	MS – mag stripe DV – dual validation (magstripe + keypad) PH – HID® proximity SC – HID® iClass® PM – Indala® proximity	STK – standard S3 – ANSI	626 690 Satin* 606 612 Bright* 605 625	8CE* – extended life battery pack LM – lost motion SH* – security head screws TAC* – tactile lever 3/4* – 3/4" (19mm) throw latch OB** – non-IC zero-bitted COR*** – non IC Corbin/Russwin MED*** – non IC Medeco SAR*** – non IC Sargent SCH*** – non IC Schlage YAL*** – non IC Yale SCHRC*** – non IC Schlage removable core (14 & 15 lever only) 4SW – Shrink Wrap Battery



Wireless locks come with Integrated Door Hardware (IDH) as standard – Request-to-Exit (RQE), door position switch (DS) and latch bolt monitor switch (LS)

\* Indicates extra cost option.

\*\*Six-pin cylinder in Schlage® "C" keyway included with OB, KA, KD options. Must specify "6" for core housing.

\*\*\*Cylinder not included with COR, MED, SAR, SCH, YAL, or SCHRC options. Must specify "0" for core housing.

## How to Order Exit Trim

EXQ	7	DV	15	MS	626	RHRB	PH2	RM	
Series	Core Housing	Function Code	Lever Style	Trim Style	Finish	Door Hand	Manufacturer	Locking Type	Options
EXQ – wireless	0** – keyless 7 – 7 pin IC housing accepts all BEST cores	EV – with key**	14 – curved return  15 – contour angle return 	MS – magstripe DV – dual validation (magstripe + keypad) PH – HID proximity SC – HID iClass PM – Indala proximity	626 690 Satin* 606 613	RHRB LHRB	VD9 – Von Duprin 98/99 series PH2 – Precision Hardware 2000 series SA8 – Sargent 8000 series***	RM – rim*** MO – mortise RD – surface and concealed vertical rods	SH* – security head screws Thick Door* – specify thickness

Wireless locks come with door position switch (DS) and connector/input to connect to Request-to-Exit (RQE) switch inside exit device. Latch switch monitoring capability is available for Precision™ Exit devices that include the latch monitor option.

\* Indicates extra cost option. \*\*The EV function (key override) is not available on the Von Duprin™ mortise type or Sargent™ rim type device.

\*\*\*SA8 Only available with rim type device.

## How to Order Wireless Conversion Kits

Series	
WQCNKT-1 – Cylindrical wireless upgrade kit	Kit to convert a B.A.S.I.S.® 9K V/G stand-alone lockset to a BEST® Wi-Q™ Wireless Lockset. Note: Kit includes a new 9K chassis with new motor, RQE hub and door position switch.
WQCNKT-2 – Mortise DV function (without deadbolt) wireless upgrade kit with alarm functionality	Kit to convert a B.A.S.I.S. 35H V/G or B.A.S.I.S. 45H V/G stand-alone lockset to a BEST Wi-Q Wireless Lockset. Note: Kit also contains a new 45H DV mortise case which includes RQE, Door Position Switch, Latch Position Switch, and Key Override Sensor to provide full alarm functionality.
WQCNKT-3 – Mortise TV function (with deadbolt) wireless upgrade kit with alarm functionality	Kit to convert a B.A.S.I.S. 35H V/G or B.A.S.I.S. 45H V/G stand-alone lockset to a BEST Wi-Q Wireless Lockset. Note: Kit also contains a new 45H TV mortise case which includes RQE, Door Position Switch, Deadbolt Position Switch, and Key Override Sensor to provide full alarm functionality.

Upgrade kits must be installed by a BEST technician for warranty purposes.

## BEST Wi-Q™ AT A GLANCE

HARDWARE FEATURES	Wi-Q SOFTWARE FEATURES		Wi-Q 3.1 FEATURES
Battery Operated	Door Controllers Per System	5,000*	Controller passage mode with authority
Programmed with Computer at Central Location	Sign On/Configuration Tool (ie - PDA) Required	NO	Controller deadbolt override with authority
14,000 Users per Lock	Door Controllers Per Access Point	64	Controller 1st card unlock with authority
Audit Trail Function	Intelligence At The Door	YES	Support for offline Omnilock (OM2000)
Number of Time Zones - 512 * 6 Intervals (3,072)	B.A.S.I.S.® Software Compatible	YES	Portal Gateway IPv6
Key Override Capability	C.Cure9000 Software Compatible	YES	Credential size - from 20 to 32 digits
Dual Validation Keypad/Mag Reader	Lenel OnGuard® Compatible	YES	
Pin #'s vary in length from 4-9 characters	FIPS140 Compliant	YES	
Mag Stripe Reader	iCLASS	YES	
Prox Reader	Dual Mag Stripe Keypad	YES	
Exit Trim Available	*These numbers have the ability to be much higher or lower depending on the user's system configuration.		
Decision made at reader			



6161 East 75th Street  
Indianapolis, IN 46250 USA

Phone 855-365-2407

[bestaccess.com](http://bestaccess.com)

