



1 * Use Template on reverse page to verify locations *

3 Mount Backbox on door.

- Make sure bevels match for both backbox and door.
- Remove knockouts (from bottom for metal doors, or from back for wood doors).
- Pull at least 5" of field wiring through the knockouts.
- Install STRAIN RELIEF

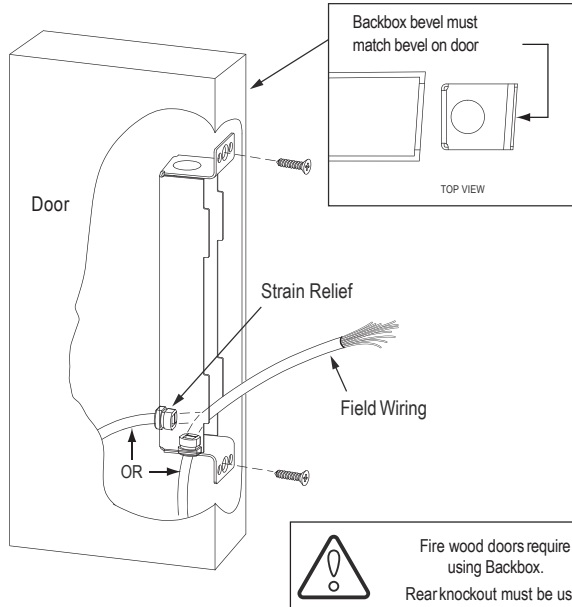


4 Connect the wires with appropriate or specified connectors.

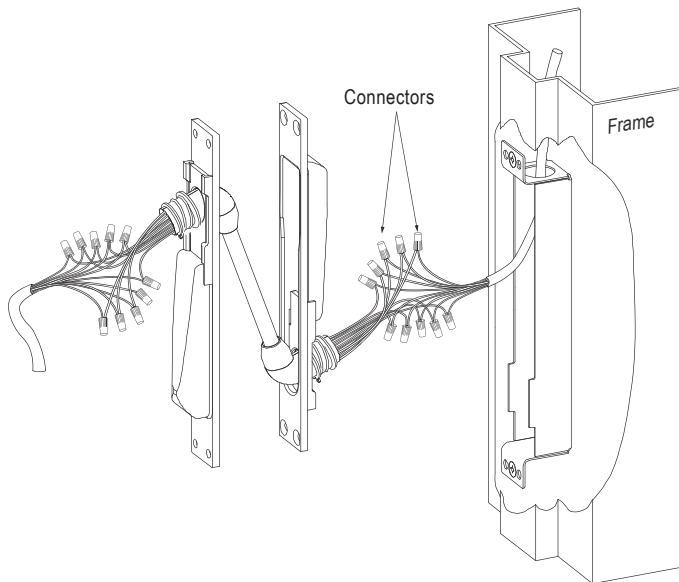


*CATETP-10 shown in illustration

2 Mount Backbox on frame.

- Remove top knockout (top for metal doors, back for wood doors)
- Install 1/2" conduit, if applicable
- Extend approx. 5" of field wiring through knockout.

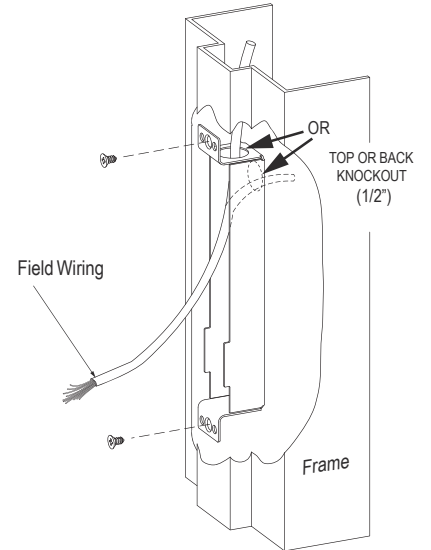


5 Mount CATETP Assembly on both the door and frame.

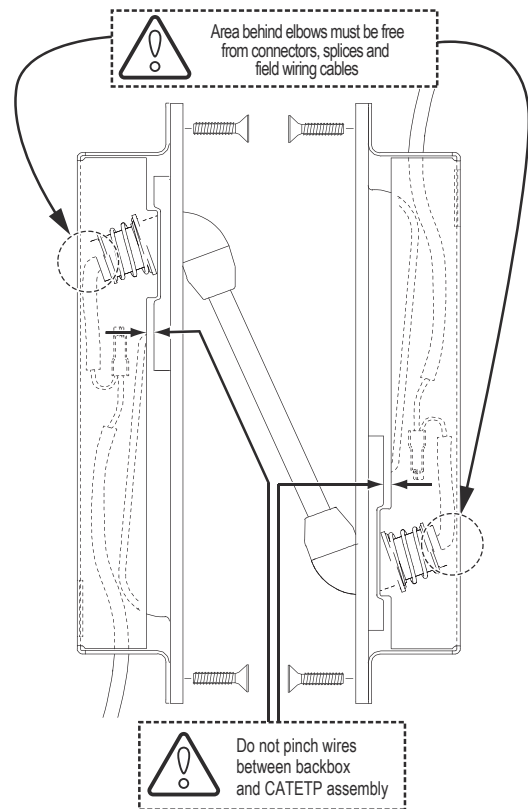

6 Check if the door opens and closes properly without binding. Check if all electrical components installed are working.

Must have 1/2" movement when pulled straight out.




TEMPLATE

LOCATION OF TOP HINGE FROM TOP DOOR		
MANUFACTURER	DOOR SIZE	
	6'8"	7'0" 8'0"
	A	
AMWELD	7 3/8"	7 3/8" 7 3/8"
CECO	6 5/8"	6 5/8" 6 5/8"
CURRIES	4 7/8"	4 7/8" 4 7/8"
DKS	7 3/8"	7 3/8" 7 3/8"
FENESTRA	5 1/8"	5 1/8" 5 1/8"
KEWANEE	7 1/4"	7 1/4" 7 1/4"
MESKER	4 7/8"	4 7/8" 4 7/8"
PIONEER	4 7/8"	4 7/8" 4 7/8"
REPUBLIC	7 3/8"	9 3/8" 4 7/8"
STEELCRAFT	7 3/8"	7 3/8" 7 3/8"

$L1 = A + H + 6 \quad 2\frac{1}{32}''$
 $L2 = D - L1 + 7 \quad 3\frac{3}{4}''$

A = REFER TO TABLE
 D = DOOR HEIGHT
 H = HINGE HEIGHT

L1 = LOCATION FROM TOP OF DOOR
 L2 = LOCATION FROM BOTTOM OF DOOR

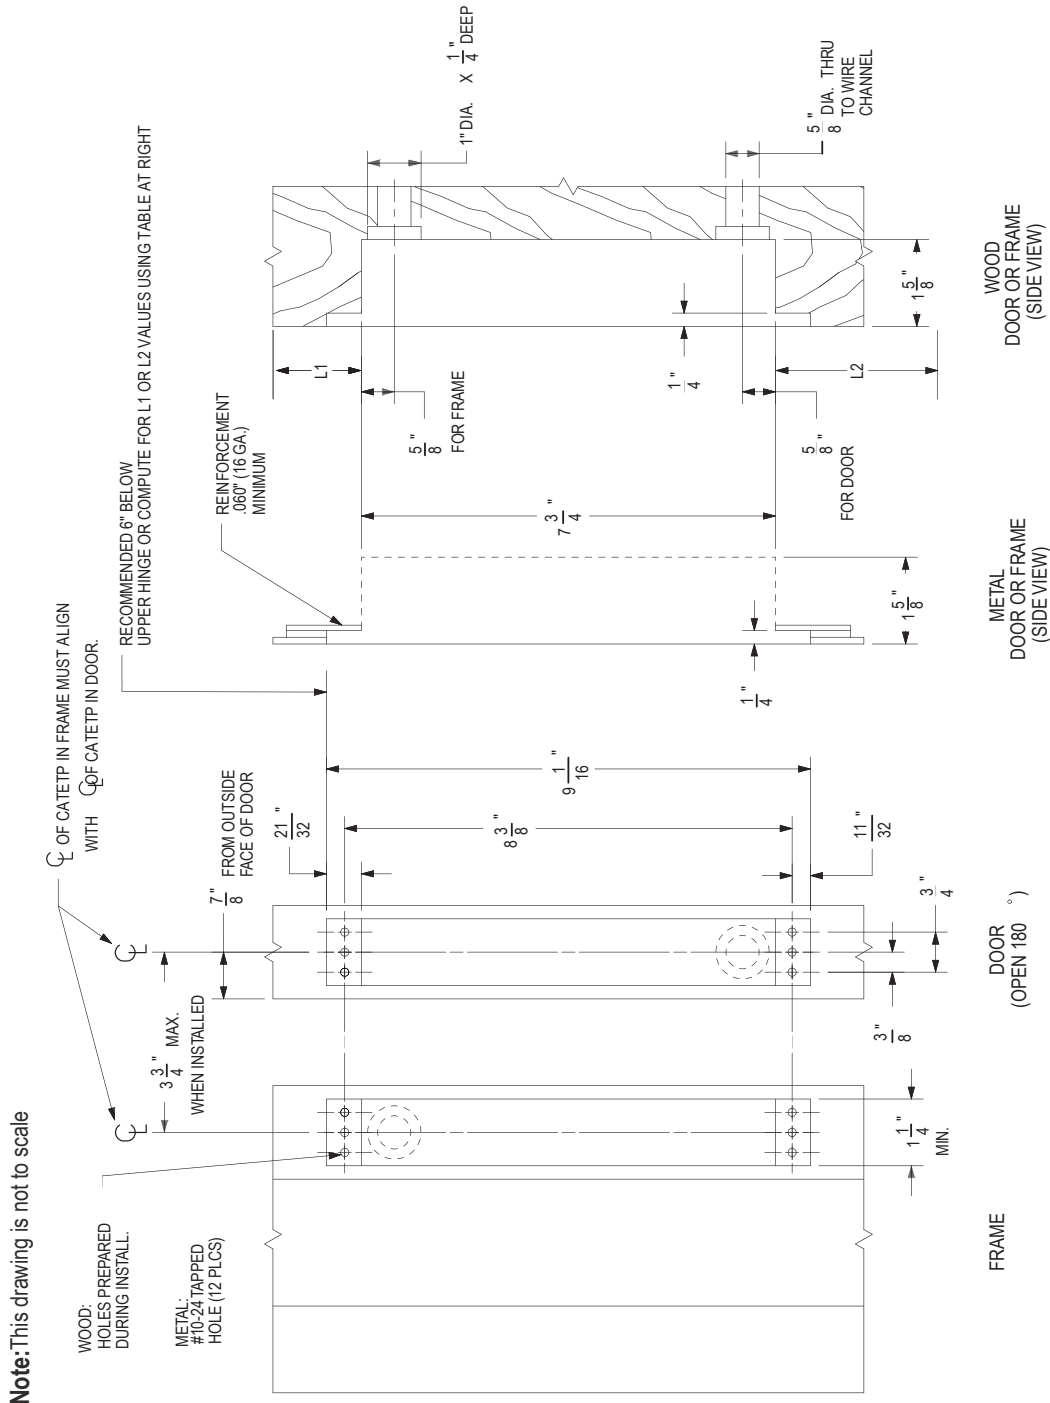

***ALL DIMENSIONS ARE TYPICAL**