


PD-28-SVR - PANIC & PD28F-SVR- FIRE LABELED
SURFACE VERTICAL ROD EXIT DEVICES

TEMPLATE: CAT-9701
REV. 0 4-27-23

PD28 SERIES EXIT DEVICES USING SNB OR SURFACE MOUNT FASTENERS

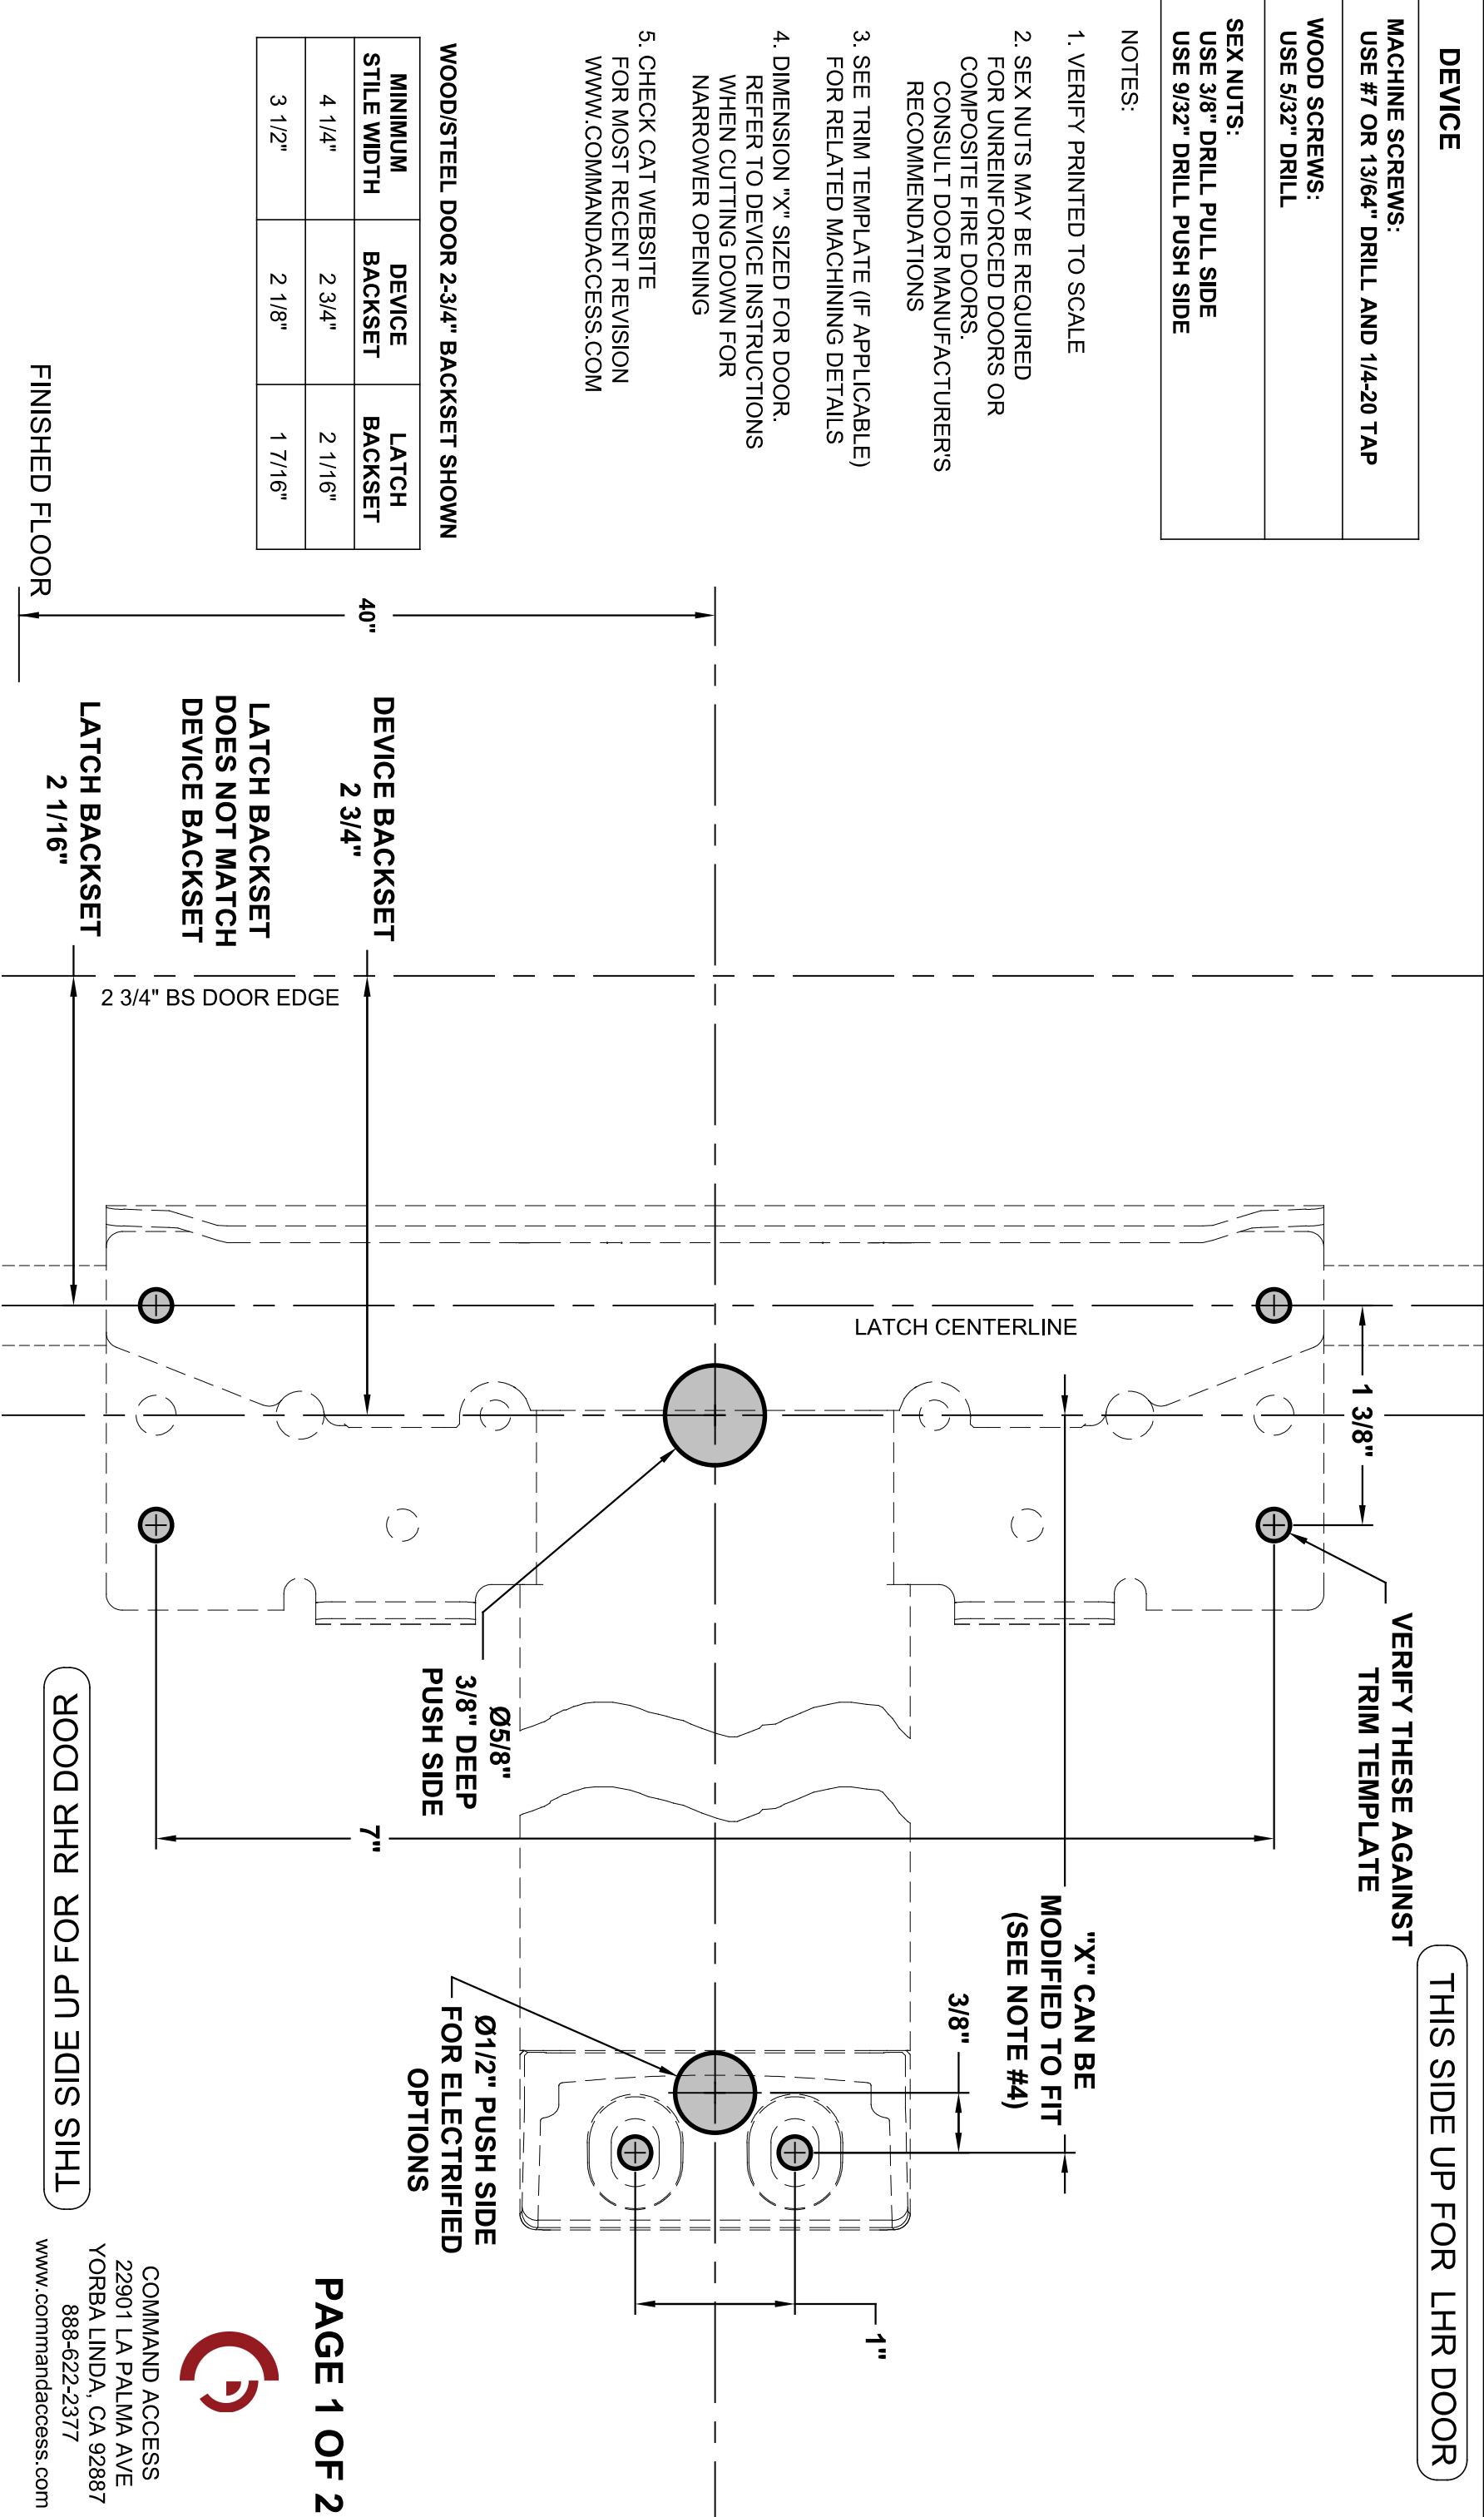

WOOD RHR FOR PD28F-SVR

COMMAND ACCESS
22901 LA PALMA AVE
YORBA LINDA, CA 92887
888-622-2377
www.commandaccess.com

TOP STRIKE

MACHINE SCREWS:
USE #25 OR 5/32" DRILL
AND #10-24 TAP

FOLD HERE, PLACE
AGAINST DOOR & STOP

TOP/BOTTOM LATCH TO DOOR

MACHINE SCREWS:
USE #7 OR 13/64" DRILL AND 1/4-20 TAP

WOOD SCREWS:
USE 5/32" DRILL

SEX NUTS:
USE 3/8" DRILL PULL SIDE
USE 9/32" DRILL PUSH SIDE

DEVICE BACKSET	LATCH BACKSET
2 3/4"	2 1/16"
2 1/8"	1 7/16"

2 3/4" BS DOOR EDGE - LHR

2 3/4" BS DOOR EDGE - RHR

2 1/16"
LATCH BACKSET
DOES NOT MATCH
DEVICE

2 1/16"
LATCH BACKSET
DOES NOT MATCH
DEVICE

PUSH SIDE FACE OF DOOR

**FOR DOORS WITH 1/2" THRESHOLD,
MEASURE 1-11/16" TO LOWER LATCH
MOUNTING HOLE FROM TOP OF
THRESHOLD, USE UPPER PIN HOLE
IN BOTTOM ROD TO FASTEN LATCH

BOTTOM EDGE OF DOOR

DOOR EDGE

BOTTOM
STRIKE

FINISHED FLOOR

FOLD HERE, PLACE
AGAINST FLOOR & DOOR

PAGE 2 OF 2



COMMAND ACCESS
22901 LA PALMA AVE
YORBA LINDA, CA 92887
888-622-2377
www.commandaccess.com