


Notes:

1. This template is an addition to the device template. Locate centerlines using horizontal and vertical references on device template.
2. Dimensions are in inches (mm).
3. LHR door shown. Preparation is typical for both door hands.
4. Prepare mounting holes when installing trim.
5. Provide adequate internal support to prevent door deformation after trim is bolted to the device.
6. Dimensions given about a centerline are symmetrical.
7. Unspecified radius 1/8 maximum.



9700 & 9M700 TCPAC Series
 Note: Lever design prefix does not affect door prep.

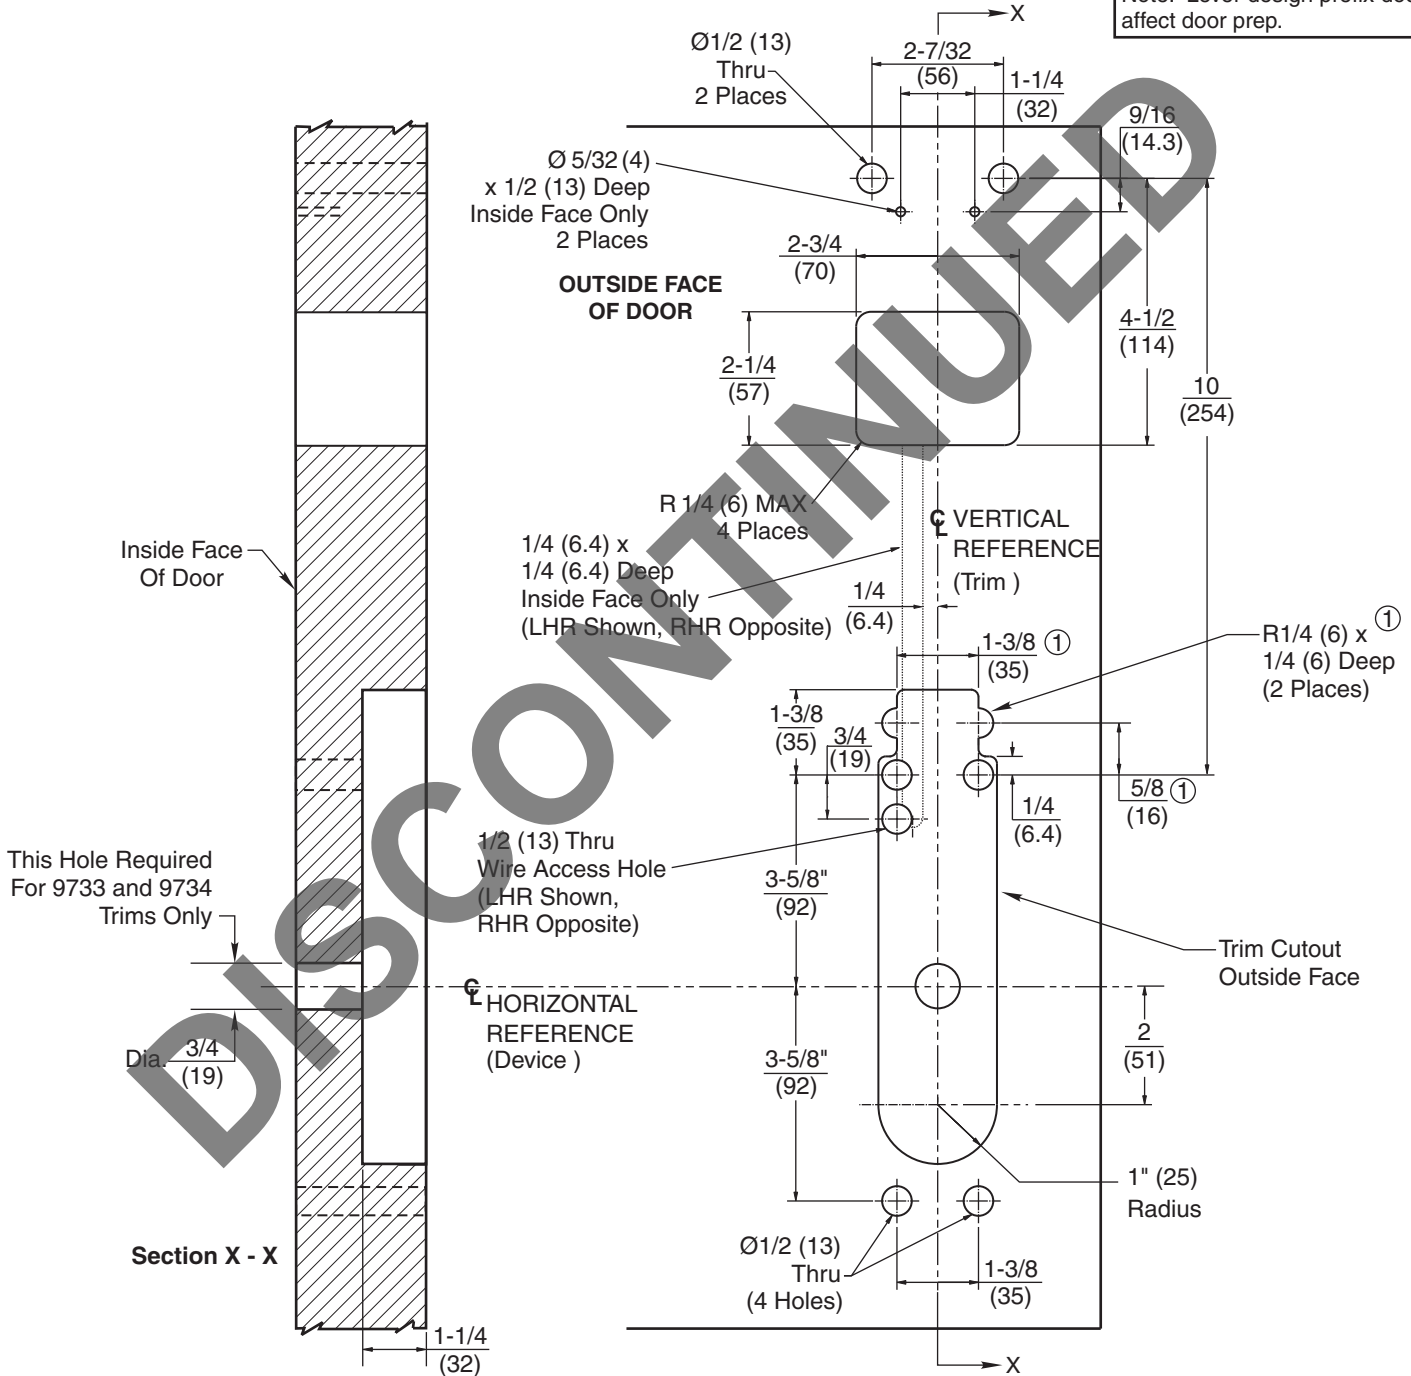

RESPONSIBILITY

DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

**9733, 9734, 9M733 and 9M734
 (Access 700® TCPAC Series Trim)
 ED5000 Series**

**SecureBolt™, Rim and Mortise Exit Devices
 Wood or Composite Door Preparation**



ASSA ABLOY

www.corbinruswin.com

SUPERSEDES	T31079	DO NOT SCALE DRAWING
TEMPLATE NUMBER	T31079-1	DATE 03-18