

Sleek Networked Access Control

0







Access 600[®] RNE1

Designed with aesthetics in mind, the Access 600[®] RNE1 integrates all standard access control components into a small, streamlined lock, offering the perfect balance of style and security.

The Access 600 RNE1 features Grade 1 Corbin Russwin hardware in mortise lock, cylindrical lock, multi-point lock and exit device configurations. This wide range of quality hardware, customized monitoring options and easy system expansion define the advantages of the Access 600.



Access Sleek Networked Access Control

APPLICATIONS

- Corporate campuses
- Schools
- Healthcare facilities

SPECIFICATIONS AND SYSTEM REQUIREMENTS

Operating Power:

- 125 kHz HID[®] prox: reader 12VDC; cylindrical locks available as 12 or 24VDC; mortise locks, multi-point locks and exit devices operate from 12-24VDC
- 13.56 MHz HID iCLASS SE[®] and PIV/ PIV-I: reader available as either 12 or 24VDC; cylindrical locks available as 12 or 24VDC; mortise locks, multipoint locks and exit devices operate from 12-24VDC
- Mortise locks, multi-point locks and exit devices field selectable to fail-safe or fail-secure; must specify fail-safe or fail-secure for cylindrical locks

Software:

Open architecture platform is compatible with all popular access control systems

Available through Authorized Channel Partners only. Contact your ASSA ABLOY Door Security Solutions sales consultant for details.


Installed by



Corbin Russwin Architectural Hardware 225 Episcopal Road, Berlin, CT 06037 Phone 800-543-3658 Fax 800-447-6714 www.corbinrusswin.com

FFATURES AND RENEFITS

- ANSI/BHMA Grade 1 lock, available in cylindrical lock, mortise lock, multi-point lock and exit device configurations, offers the highest degree of physical security available in access control locks
- All standard access control components, including card reader, door position switch and request to exit monitoring sensors are consolidated into the lock, significantly reducing installation time
- Streamlined appearance blends seamlessly into any environment and maintains architectural integrity around the door
- Open architecture platform is compatible with all popular access control systems
- ElectroLynx[®] universal quick-connect system reduces installation time and costs, improves reliability
- Lockdown capability offers the ability to secure areas immediately
- Supports industry leading credentials:
 - HID 125KHz PROX
 - HID 13.56 MHz iCLASS SE
 - PIV/PIV-I (64-bit BCD, 128-bit BCD or 200-bit output)
- Available with MicroShield[®] antimicrobial finish
- Available in a variety of finishes with multiple lever options. including standard as well as Muséo[®] and Vineyard[™] decorative levers, for a consistent design aesthetic throughout your facility
- Mortise locks, multi-point locks and exit devices feature EcoFlex[®] technology - Reduces energy consumption up to 96%, as certified by GreenCircle
- Field configurable to fail-safe or fail-secure
- Operates from 12-24VDC, offering greater flexibility in system design
- Innovative actuator design provides superior reliability

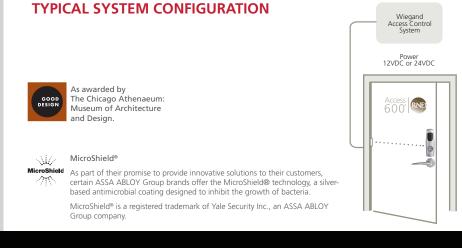

ASSA ABLOY Door Security Solutions Canada 160 Four Valley Drive, Vaughan, Ontario, Canada L4K 4T9

Phone: 800-461-3007 Fax: 800-461-8989 www.assaabloydss.ca

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

Copyright © 2007-2019, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited. Patent pending and/or patent www.assaabloydss.com/patents