
Installation Instructions


ASSA ABLO


Active Indicator Retrofit Kit

PED4000 / PED5000 Series Exit Devices

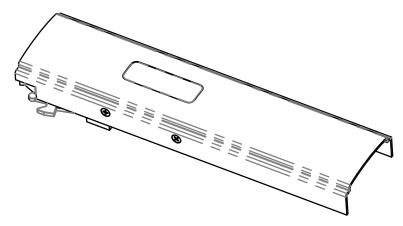

Active Indicator Insert View

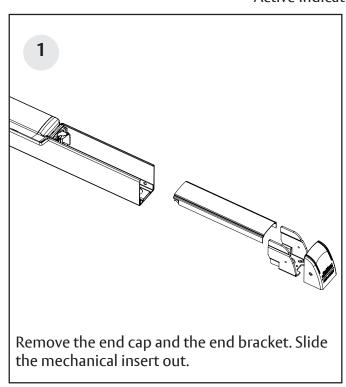

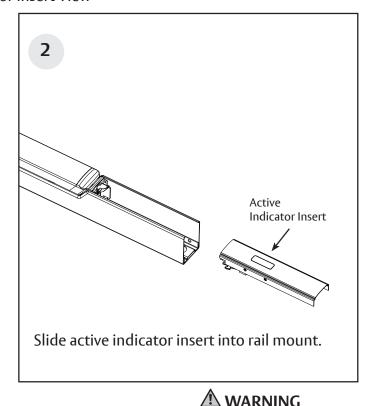


A WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www. P65warnings.ca.gov.


Attention Installer: Improper installation may result in damage to the product and void the factory warranty.

For installation assistance contact Corbin Russwin 1-800-543-3658 • techsupport.corbinrusswin@assaabloy.com






Connect by (A) compressing the bar, and (B) sliding insert in. Position (C) & (D) to connect as shown. Push insert to snap onto the dogging slope.



Test the function by (A) compressing the bar, and (B) turning the key clockwise to engage dogging. The bar should stay compressed. "Unlocked" should display.



Test the function by (A) turning the key counter clockwise to release dogging. (B) The bar should return to the uncompressed position on its own. "Locked" should display.