



Notes:

1. Backset is measured from centerline of bevel which is centerpoint of door thickness.
2. Door prep with 2-3/4" (70) backset meets ANSI/BHMA A156.115 for steel doors and A156.115W for wood doors plus through bolt holes shown.
3. Dimensions given in inches and (mm).
4. 1-1/4" strike lip suits frame for 1-3/4" thick door.

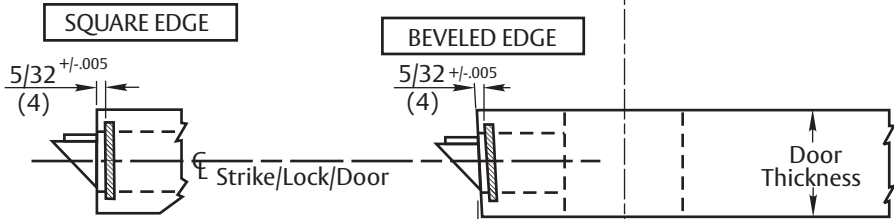

**CAUTION: DOOR AND FRAME MANUFACTURERS**  
 When door gasketing or silencers are used, proper allowances must be made for strike location to maintain a common centerline with lock and door as shown so that bolt will freely enter strike.

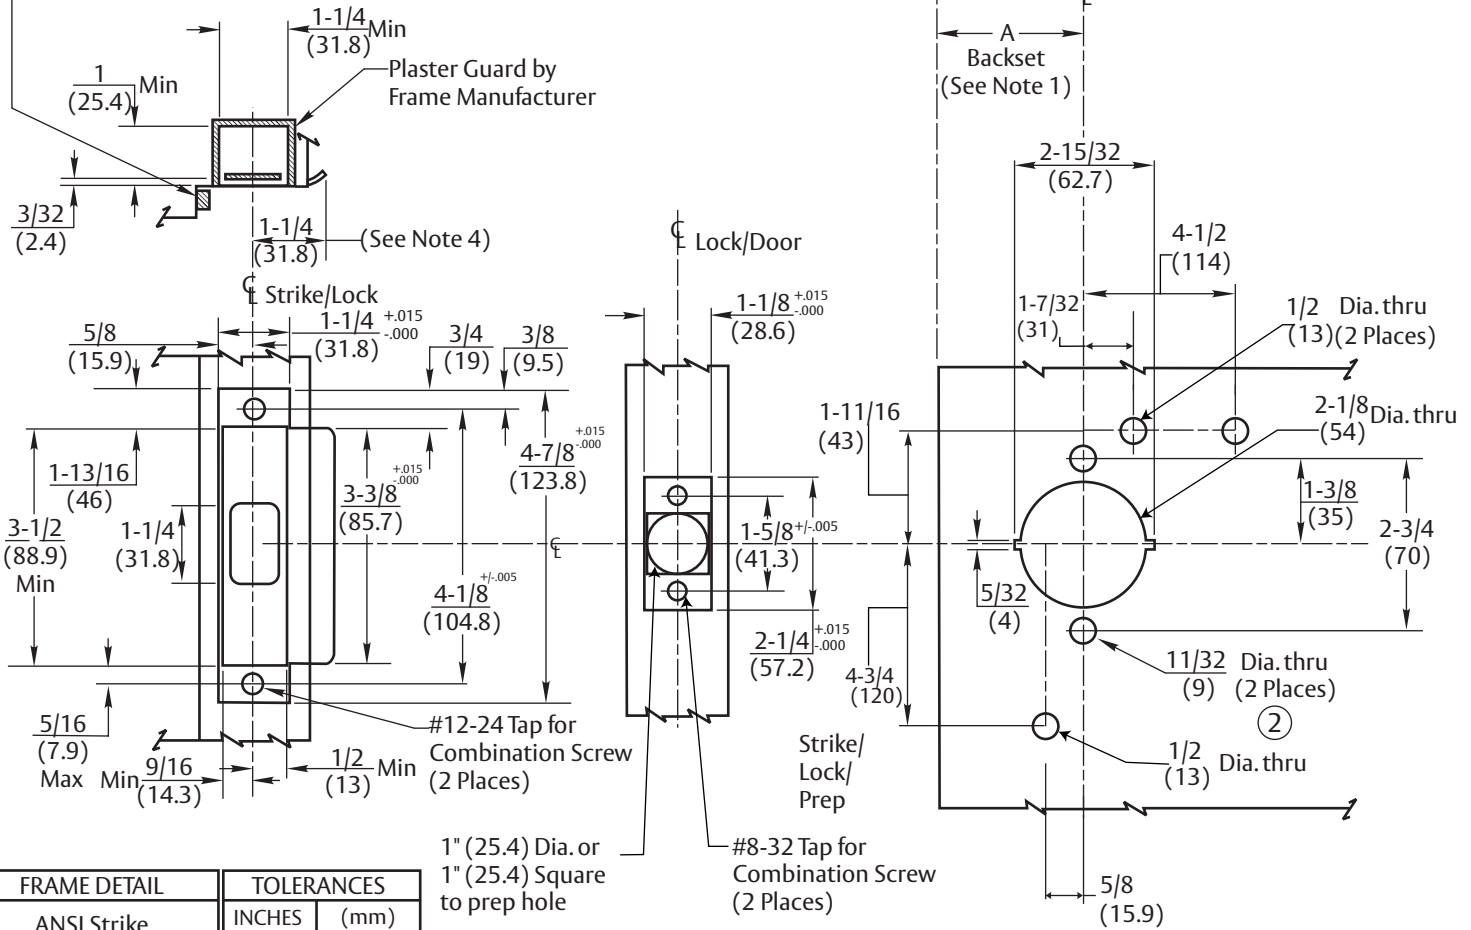

1" (25.4) Dia. or  
 1" (25.4) Square  
 to prep hole

FRAME DETAIL	TOLERANCES	
	INCHES	(mm)
ANSI Strike (Regularly Furnished)	.005	(.127)
	.015	(.381)

**RESPONSIBILITY**  
 DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

**CLX3300 Series  
 with BHSS Trim Cylindrical Lock  
 All Functions**



www.corbinrusswin.com

SUPERSEDES	T31261-1	DO NOT SCALE DRAWING
TEMPLATE NUMBER	T31261-2	SHEET 1 of 1 DATE 03/23

Experience a safer and more open world

Copyright © 2022, 2023, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.