

# Assembly and Installation Instructions: Schlage Interchangeable Core Tailpiece

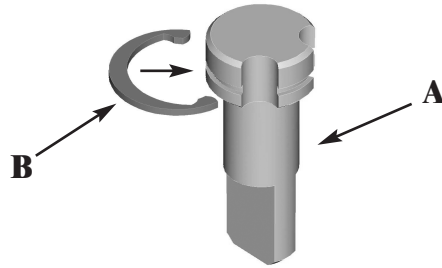


Figure 1: Tailpiece and Retainer Clip

Your Tailpiece kit (697F942) comes with two components:

- (A) Tailpiece 697F922
- (B) Retainer clip 697F938

### **Assembly Instructions:**

*Note: flat side of tailpiece should align with key after installation*

1. Slide retainer clip into groove in tailpiece.
2. Rotate tailpiece to leave the appropriate slot open. See below for correct retainer clip orientation.
  - a. For all Schlage cylinders except Primus, see fig. 2.
  - b. For Primus see fig. 3.



Figure 2: All (except Primus)



Figure 3: Primus only

### **Installation Instructions:**

1. Remove key from cylinder.
2. Unscrew threaded cap from end of cylinder (it will be necessary to depress the locking pin).
3. Place tailpiece inside the exposed end of cylinder with locking pin in open slot.
4. Reverse step 2 to reinstall cap.
5. Install cylinder in lock normally per manufacturers instructions.



#### **WARNING**

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov).

08/2018

*This form to be included with all CL3300 and CL3500 locks using the M69 option*

**Corbin  
Russwin**

**ASSA ABLOY**

In U.S.:  
Corbin Russwin, Inc.  
225 Episcopal Road  
Berlin, CT 06037 USA  
Phone: 800-543-3658

**Technical Product Support:**  
Phone: 888-607-5703

In Canada:  
ASSA ABLOY Door Security Solutions Canada  
160 Four Valley Drive  
Vaughan, Ontario, Canada L4K 4T9  
Phone: 800-461-3007

FM 207 11/18